

FSC 5340

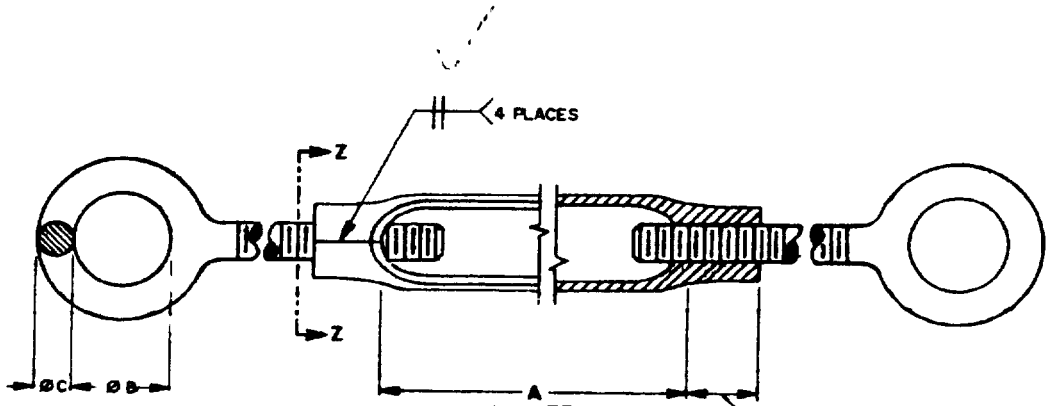


TURNBUCKLE ASSEMBLY

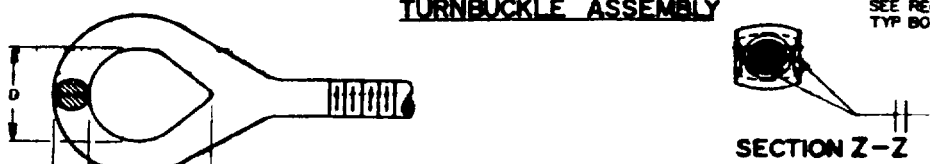


END PULL, OPTIONAL EYE CONFIGURATION

SECTION Z-Z

TABLE 1. DASH NUMBERS AND DIMENSIONS

| DASH NUMBER | NOMINAL THREAD SIZE | A MIN | EYE | | | |
|---|---|---|---|---|---|---|
| | | | Ø B MIN | Ø C MIN | D MIN | E MIN |
| 1 | .250-20 | 4 | .500 | .218 | .344 | .687 |
| 2 | .3125-18 | 4.5 | .625 | .281 | .437 | .812 |
| 3 | .375-16 | 6 | .750 | .344 | .531 | .937 |
| 4<br>5<br>6 | .500-13 | 6<br>9<br>12 | 1.000 | .437 | .718 | 1.187 |
| 7<br>8<br>9<br>10 | .625-11 | 6<br>9<br>12<br>18 | 1.250 | .500 | .875 | 1.375 |
| 11<br>12<br>13<br>14<br>15 | .750-10 | 6<br>9<br>12<br>18<br>24 | 1.500 | .625 | 1.000 | 1.625 |
| 16<br>17<br>18 | .875-9 | 12<br>18<br>24 | 1.750 | .750 | 1 250 | 1 875 |
| 19<br>20<br>21<br>22 | 1.000-8 | 12<br>18<br>24<br>36 | 2.000 | .875 | 1.437 | 2.250 |

APPROVED 16 FEB 1988 REVISED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Deletion for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

USER ACTIVITIES
ARMY - ME
NAVY - AS, MC, OS, YD

REVIEWER ACTIVITIES
ARMY - CR
AIR FORCE - 82
DLA - IS

| P.A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| ARMY - AR<br>Other Cust<br>NAVY - SH<br>AIR FORCE - 99 | | TURNBUCKLE, FLAT BODY, EYE AND EYE (TYPE I, FORM 3, CLASS 4) | MS51571 |
| PROCUREMENT SPECIFICATION<br>FF-T-791 | SUPERSEDES: | | PAGE 1 OF 3 |

DD FORM 1, MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1811

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

| DASH NUMBER | NOMINAL THREAD SIZE | A MIN | EYE | | | |
|---|---|---|---|---|---|---|
| | | | ØB MIN | ØC MIN | D MIN | E MIN |
| 23<br>24<br>25<br>26 | 1.250-7 | 12<br>18<br>24<br>36 | 2.125 | 1.062 | 1.687 | 2.562 |
| 27<br>28<br>29<br>30<br>31 | 1 500-6 | 12<br>18<br>24<br>36<br>48 | 2.250 | 1.250 | 2.125 | 3.250 |
| 32<br>33<br>34<br>35 | 1.750-5 | 18<br>24<br>36<br>48 | 2.900 | 1.437 | 2 375 | 3.750 |
| 36<br>37<br>38 | 2.000-4.5 | 24<br>36<br>48 | 3.000 | 1 625 | 2.687 | 4.375 |
| 39<br>40<br>41 | 2.250-4 5 | 24<br>36<br>48 | 3 250 | 1.812 | 2.937 | 5.187 |
| 42<br>43<br>44 | 2.500-4 | 24<br>36<br>48 | 3 500 | 2 000 | 3.125 | 6 000 |

REQUIREMENTS:

1 MATERIAL TURNBUCKLE BODY AND END PULLS SHALL BE MANUFACTURED FROM STEEL OF A COMPOSITION CAPABLE OF WITHSTANDING THE SPECIFIED BREAKING STRENGTH IN THE PROCUREMENT SPECIFICATION

2. FABRICATION METHOD:

BODY - THE TURNBUCKLE BODY SHALL BE FABRICATED BY JOINING TWO FORMED PIECES OF MATERIAL BY EITHER THE FLASH OR UPSET WELDING PROCESS AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.

END PULLS - THE END PULLS SHALL BE HOT FORGED

3 FINISH:

RUST INHIBITOR - TURNBUCKLE BODY AND END PULLS SHALL BE TREATED WITH RUST INHIBITOR IN ACCORDANCE WITH MIL-C-85054 OR EQUIVALENT

ZINC COATING - TURNBUCKLE BODY AND END PULLS SHALL BE ZINC COATED AS SPECIFIED IN PROCUREMENT SPECIFICATION, ASTM B633, TYPE II, Fe/Zn 13.

4. THREADS: ONE END PULL AND THE CORRESPONDING HEAD BODY SHALL HAVE RIGHT HAND THREAD AND THE OTHER LEFT HAND. THE THREAD SHALL BE MACHINED AFTER FABRICATION OF END PULL AND THE HEAD BODY

5. LENGTH OF HEAD: THE LENGTH OF THE HEAD OF THE TURNBUCKLE BODY SHALL BE NOT LESS THAN 1 1/2 TIMES THE NOMINAL THREAD SIZE FOR SIZES UP TO 1.250, AND 1 1/4 TIMES FOR SIZES GREATER THAN 1.250 NOMINAL THREAD SIZE.

6. BREAKING STRENGTH THE BREAKING STRENGTH OF THE TURNBUCKLE SHALL BE NOT LESS THAN THE VALUE SPECIFIED IN THE PROCUREMENT SPECIFICATION FOR TYPE I, FORM 3, WITH EYE AND EYE END PULLS

7 BENDING STRENGTH THE BENDING STRENGTH SHALL BE AS SPECIFIED IN THE PROCUREMENT SPECIFICATION

8 LENGTH OF THREAD THE LENGTH OF THE THREAD ON THE TWO END PULLS SHALL BE GREAT ENOUGH SO THAT THE ENDS OF THE END PULLS CAN BE BROUGHT INTO CONTACT WITH EACH OTHER AT THE MIDDLE OF THE BODY LENGTH

USER ACTIVITIES:
ARMY - ME
NAVY - AS, MC, OS, YD

REVIEWER ACTIVITIES:
ARMY - CR
AIR FORCE - 82
DLA - IS

APPROVED 16 FEB 1988 REVISED

The military standard is approved for use by all Departments and Agencies of the Department of Defense. Deviation for all new engineering and design applications and for repetitive use shall be made from this document when applicable

| P.A. ARMY - AR<br>Other Govt<br>NAVY - SH<br>AIR FORCE - 99 | INTERNATIONAL INTEREST | TITLE<br>TURNBUCKLE, FLAT BODY, EYE AND EYE (TYPE I, FORM 3, CLASS 4) | MILITARY STANDARD<br>MS51571 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION<br>FF-T-791 | SUPERSEDES: | | PAGE 2 OF 3 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

9 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I AND THE FINISH CODE BELOW

FINISH CODE.

F - RUST INHIBITOR TREATMENT
Z - ZINC COATED.

EXAMPLE: MS51571-7Z




MS51571-7Z INDICATES: TURNBUCKLE, RESISTANCE WELD BODY, EYE AND EYE END FULLS; .625-11 THREAD; 6-INCH CLEAR OPENING BETWEEN HEADS; ZINC COATED

NOTES:

1 ALL DIMENSIONS ARE IN INCHES. TOLERANCES SHALL BE IN ACCORDANCE WITH STANDARD MANUFACTURING PRACTICES FOR TURNBUCKLES.

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

4 DIMENSION "A" IS THE TAKE UP LENGTH OR CLEAR OPENING INSIDE OF THE BODY.

USER ACTIVITIES:
ARMY - ME
NAVY - AS, MC, OS, YD

REVIEWER ACTIVITIES:
ARMY - CR
AIR FORCE - 82
DLA - IS

APPROVED 16 FEB 1988 REVISED

The military standard is approved for use by all Departments and Agencies of the Department of Defense. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament, Munitions and Chemical Command, ATTN: AMSMC-QAE-Q, Rock Island, IL 61299-7300 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

| P A | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| ARMY - AR<br>Other Cust<br>NAVY - SH<br>AIR FORCE - 99 | | TURNBUCKLE, FLAT BODY, EYE AND EYE (TYPE I, FORM 3, CLASS 4) | MS51571 |
| PROCUREMENT SPECIFICATION<br>FF-T-791 | SUPERSEDES: | | PAGE 3 OF 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.