
FED. SUP CLASS
2320

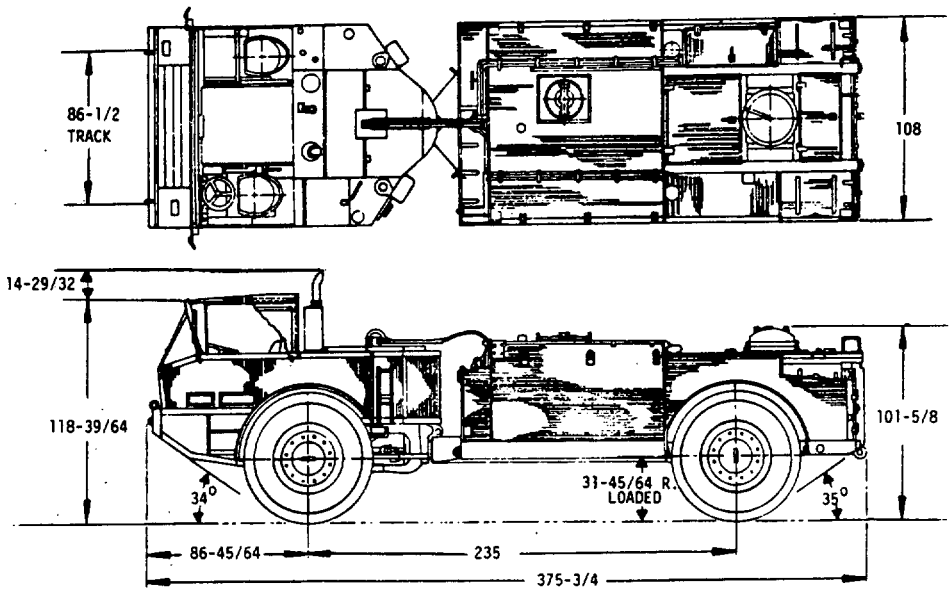

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 30 SEPT 1969 REVISED © 15 JAN 85

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS52112-1	11614319

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, TANK, FUEL-SERVICING, 2500 GALLON, 4X4, MILITARY DESIGN, M 559	MILITARY STANDARD MS52112(AT)
PROCUREMENT SPECIFICATION MIL-T-62248	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

MODEL M559: TRUCK, TANK 11614319

GROSS VEHICLE WEIGHT: FULLY EQUIPPED

	WO/PAYLOAD	W/PAYLOAD
FRONT AXLE	17425 LBS	23770 LBS
REAR AXLE	10675 LBS	22780 LBS
TOTAL	28100 LBS	46550 LBS

TOWING CAPACITY: 20000 LBS

MINIMUM TURNING DIA: WALL TO WALL 52.7 FT.

GENERAL:

BODY ASSY, FRONT		11614753
BODY ASSY, REAR		11614954
WINSHIELD AND FRAME	INST'N	11614950
OPERATOR COMPARTMENT	INST'N	11650956
COMPANION COMPARTMENT	INST'N	11650955
FRONT AIR SYSTEM	INST'N	11614963
REAR AIR SYSTEM	INST'N	11614952
GAGE AND PANEL	INST'N	11620146
STENCIL AND STOWAGE	INST'N	11618352
VALVE CONTROL	INST'N	11624435
FRONT BILGE PUMP	INST'N	11614878
REAR BILGE PUMP	INST'N	11624553

POWER PLANT: INST'N 11614404

ENGINE DIESEL;
BORE AND STROKE; 4.75 X 6.00 IN. CO-
PRESSION RATIO 17.5:1
FUEL: DIESEL JP4, FURNACE #2
LUBE CAPACITY 26 QTS, FUEL TANK CAP-
ACITY 106 GALLONS.
BHP MAX. GROSS 213 MAX. NET 192 @
2200 RPM.
TORQUE MAX. GROSS 578 FT. LBS, MAX
NET 547 @ 1550 RPM.
COOLING SYSTEM CAPACITY 104 QTS.

POWER PLANT ASSY.		11681062
TRANSMISSION CONTROL	INST'N	11614880
TRANSMISSION AND CASE ASSY.		11635131
PUMP ASSY, TRANSMISSION.		11623910
OIL FILTER ASSY.		11620782
OIL LINES	INST'N	11624192
HARNESS ASSY, WIRING		11617914
SUMP ASSY, OIL		11624024
ENGINE AIR CLEANER	INST'N	11614943
FAN AND DRIVE	INST'N	11614965
V-BELT SET		MS51068-30-2
RADIATOR	INST'N	11614941
FUEL SYSTEM	INST'N	11614949
EXHAUST EXTENSION	INST'N	11614942
GOVERNOR CONTROL	INST'N	11614810
REAR HYDRAULIC	INST'N	11632543
FUEL DISPENSING	INST'N	11618588
EMERGENCY VALVE	INST'N	11632592

STEERING GEAR: INST'N 11614610

STEERING PUMP TANK AND LINES	INST'N	11614989
STEERING LINKAGE	INST'N	11614948

ELECTRICAL SYSTEM: FRONT INST'N 11632946

ELECTRICAL SYSTEM, REAR	INST'N	11614990
SWIVEL, HYDRAULIC	INST'N	11620156
HITCH AND PIVOT	INST'N	11614300
AFBMA BR'G. REF.	93825-93125 ONE	712969
	93800-93125 TWO	712964
ELECTRICAL CONDUIT	INST'N	11632346

MIRROR: REAR VIEW TWO MS53015-2 INST'N 11614884

BRACKET; LH	11620896
RH	11620887
ARM, TWO	11620889

POWER TRAIN: FRONT INST'N 11614402

POWER TRAIN, REAR	INST'N	11614403
DIFFERENTIAL ASSY, FRONT		11614985
DIFFERENTIAL ASSY, REAR		11614885
UNIVERSAL JOINT ASSY.		11621067
CLUTCH	INST'N	11615127
AXLE ASSY; -1, -2, -3, THREE		11614876
DRIVE AND GEAR	INST'N	11614525
DRIVE SHAFT, REAR	INST'N	11633038

TIRES:

TIRE AND RIM ASSY, FOUR	11681140
TIRE 18.00X33 TEN PLY, FOUR	11618762
RIM ASSY; 33 X 13 FOUR	11681132
RING WHEEL, FOUR	11681133
HUB ASSY. WHEEL, FOUR	11614904
DRUM, FOUR	11614906
SPINDLE FINAL DRIVE, FOUR	11614369
WHEEL BEARING INNER, FOUR	712647
REF. AFBMA	68461-68712
WHEEL BEARING, OUTER, FOUR	MS19081-173
REF AFBMA	36690-366208
SEAL, OUTER	11614353
RETAINER, SEAL	11614372
SEAL, INNER	11602679

BRAKES:

ASSY, RIGHT		11614886
ASSY, LEFT		11614887
PARKING BRAKE CONTROL	INST'N	11620027

ACCESSORIES AND KITS:

FRONT CANOPY	INST'N	11614944
FRONT CANOPY FRAME	INST'N	11614945
ARCTIC KIT		11614988
PERSONNEL HEATER	INST'N	11614956
WARNING LIGHT KIT		11651365
FILTER KIT INFRA RED		11624639
FILTER SEPERATOR	INST'N	11618589
GUN RING MONUNTING KIT		11614953
CANOPY AND FRAME KIT REAR		11624590
TIRE CHAIN ASSY		11632607

CRUISING RANGE: ON LAND, 300 MILES

MAX. SPEED: ON LAND, 30.5 MPH
WATER APPROX. 2.6 MPH

*FORDING DEPTH: UNLIMITED

VEHICLE: AMPHIBIOUS INLAND WATERWAYS

GRADE ABILITY: 60%

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE OCHMAND, WARREN, MICH. 48090
4. SUBJECT OF NATO STANAG 2805-(EDITION 3). DO NOT REVISE OR CHANGE.

APPROVED 30 SEPT 1969 REVISED © 15 JAN 85

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS52112-1	11614319

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, TANK, FUEL-SERVICING, 2500 GALLON, 4X4, MILITARY DESIGN, M 559	MILITARY STANDARD MS52112(AT)
PROCUREMENT SPECIFICATION MIL-T-62248	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.