
This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army MI, SL
Navy
Air Force 11, 17, 80
DSA-ES

User activities: Army WC, SL, MU
Navy AS, SH, MC, OS
Air Force 19

FED SUP CLASS
5950

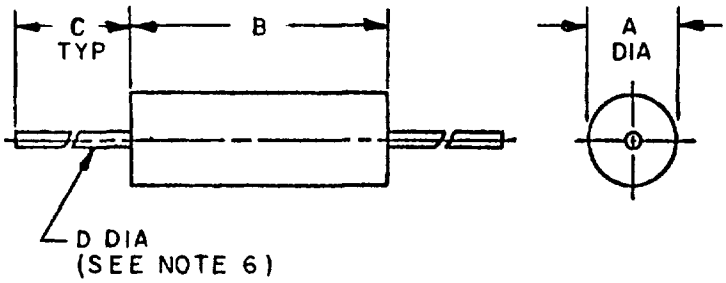


| RATINGS | |
|---|---|
| Style | LT10 |
| Grade | 1 |
| Class | A |
| Temperature rise | 15°C |
| Ambient temperature | 90°C |
| Operating temperature | -55° to +105°C |
| Dielectric withstanding Voltage (sea level) | 1000 volts rms for a minimum of 60 sec. |
| Dielectric withstanding Voltage (reduced barometric pressure) | 200 volts rms for a minimum of 60 sec. |
| Terminal pull | 5 pounds |
| Altitude | 70, 000 feet |
| Weight | 3 9 grams max. |

| Ltr | Dimensions in inches with metric equivalents (mm) in parentheses | |
|---|---|---|
| | Minimum | Maximum |
| A | .250 (6.35) | .313 (7.95) |
| B | .875 (22.23) | 1.000 (25.40) |
| C | 1.250 (31.75) | 1.625 (41.28) |
| D | 026 (.66) | .030 (.76) |

ELECTRICAL CHARACTERISTICS (INITIAL)

| Dash no. 1/ | Type designation 2/ | Former type designation | Superseded MS part no. | Inductance ±10% | Q min | Test freq. | Self-resonant frequency Min | DC resistance Max | Rated DC current |
|---|---|---|---|---|---|---|---|---|---|
| | | | | μH | | MHz | MHz | Ohms | Ma |
| -1 | LT10K181 | LT4K017 | 91189-29 | 22.0 | 50 | 2.5 | 24 | 0 295 | 725 |
| -2 | LT10K182 | LT4K018 | 91189-30 | 27.0 | 45 | 2.5 | 22 | 0.350 | 660 |
| -3 | LT10K183 | LT4K019 | 91189-31 | 33.0 | 60 | 2.5 | 19 | 0 550 | 525 |
| -4 | LT10K184 | LT4K020 | 91189-32 | 39.0 | 55 | 2.5 | 18 | 0.650 | 485 |
| -5 | LT10K185 | LT4K021 | 91189-33 | 47.0 | 65 | 2.5 | 16 | 1 00 | 390 |
| -6 | LT10K186 | LT4K022 | 91189-34 | 56.0 | 65 | 2.5 | 14 | 1.15 | 360 |
| -7 | LT10K187 | LT4K023 | 91189-35 | 68 0 | 75 | 2.5 | 13 | 1 85 | 285 |
| -8 | LT10K188 | LT4K024 | 91189-36 | 82.0 | 75 | 2.5 | 12 | 2 10 | 265 |
| -9 | LT10K189 | LT4K025 | 91189-37 | 100.0 | 75 | 2.5 | 12 | 2 50 | 245 |
| -10 | LT10K190 | LT4K026 | 91189-38 | 120.0 | 95 | 0.790 | 10 | 4 10 | 195 |

1/ The dash number added to the MS military-standard number constitutes the MS part number; for example, MS 75103-1

2/ These coils are directly interchangeable with former part numbers (MS91189-29 thru -38). The decrease in maximum operating temperature does not downgrade these coils but assures satisfactory operation at 105°C for a minimum of 2000 hours of life rather than a shorter period of life at 125°C.

APPROVED 14 Mar 1972 REVISED

| | | | |
|---|---|---|---|
| P A ARMY-EL<br>Other Cust AF-80<br>NAVY-EC | International interest | TITLE Coils, Radiofrequency, Molded, Fixed, Subminiature (Iron core) Types LT10K181 to LT10K190 incl. | MILITARY STANDARD<br>MS 75103 |
| Procurement Specification<br>MIL-C-15305 | | SUPERSEDES: MS 91189 IN PART<br>PART NUMBER 91189-29 THRU 91189-38 | SHEET 1 OF 2 |

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0403-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5950

| Electrical Characteristics (Final) | | | | |
|---|---|---|---|---|
| Inspection Group | Allowable variation from initial measurement | | Allowable % from specified minimum value in Electrical Characteristics (initial) table | |
| | Inductance | DC resistance | Self-resonant frequency | Q |
| | Percent | | | |
| Qualification Inspection | | | | |
| Group II | ±2 | -- | -- | - 10 |
| Group III | ±5 | ±(3%+.001ohm) | - 8 | - 10 |
| Group IV | ±5 | ±(2%+.001ohm) | - 10 | - 15 |
| Quality Conformance Inspection | | | | |
| Group C | | | | |
| Subgroup I | ±2 | -- | -- | - 10 |
| Subgroup II | ±5 | ±(2%+.001ohm) | - 10 | - 15 |
| Subgroup III | ±5 | ±(3%+.001ohm) | - 8 | - 10 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. These coils are intended to be mounted by the body.
4. The polarizing voltage during the moisture-resistance tests is applied with the positive lead connected to the coil terminals tied together, and the negative lead connected to the metal strap.
5. Terminal strength (Pull) test, is not applicable in "Group B" inspection Table VI.
6. Solderable/weldable lead wire, #21 AWG.
7. Barometric pressure test (test condition C) is applicable.
8. Shock, specified pulse, method 213, test condition I, is applicable.
9. Referenced document shall be the issue in effect on date of invitation for bid.
10. This standard takes precdence over the procurement specification referenced herein.

APPROVED 14 Mar 1972 REVISED

| | | | |
|---|---|---|---|
| P A ARMY-EL<br>Other Cust AF-80<br>NAVY-EC | International Interest | TITLE Coils, Radiofrequency, Molded, Fixed, Subminiature (Iron core) Types LT10K181 to LT10K190 incl. | MILITARY STANDARD<br>MS 75103 |
| Procurement Specification<br>MIL-C-15305 | | SUPERSEDES: MS 91189 IN PART<br>PART NUMBER 91189-29 THRU 91189-38 | SHEET 2 OF 2 |

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5950-0403-2

User activities: Army WC,SL,MU
Navy AS,SH,MC,OS
Air Force 19

Reviewer activities: Army MI,SL
Navy
Air Force 11,17,80
DSA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.