

FED SUP CLASS
5950

CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

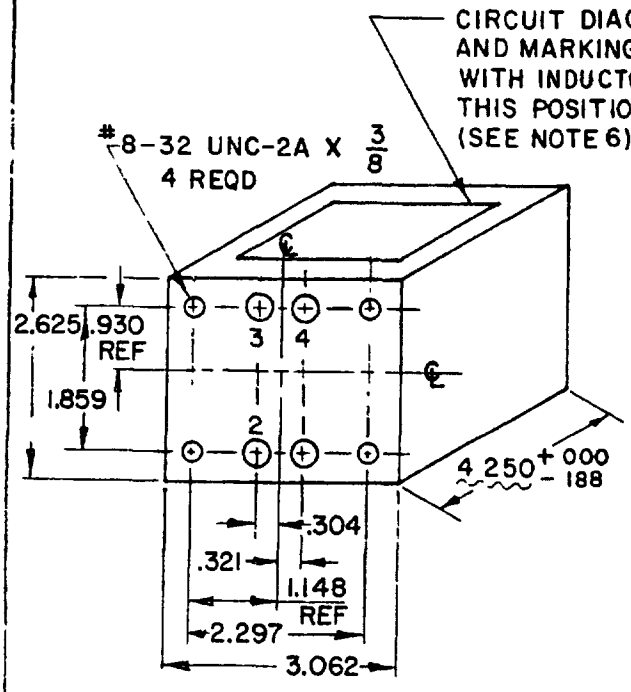

MINIMUM CHASSIS CUTOUT

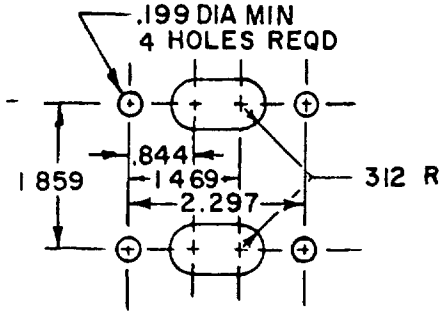


INCHES	MM
.188	4.78
.199	5.05
.304	7.72
.312	7.92
.321	8.15
.750	19.05
.844	21.44
.930	23.62
1.148	29.16
1.469	37.31
1.859	47.22
2.297	58.34
2.625	66.68
3.062	77.77
4.250	107.95
3/8	° 53

CIRCUIT DIAGRAM AND MARKING

MAX WORKING VOLTAGE 2,000V
120 CPS

SERIES-16H
630 V RMS
.125 AMP DC
330 OHMS

PARALLEL-4H
315 V RMS
.250 AMP DC
82 OHMS

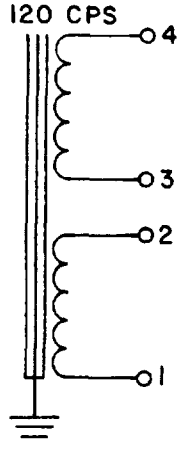

MAX ALTITUDE - 10,000 FT

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 28 MAY 1981
NO SUPERSEDING STANDARD

NOTES
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on case dimensions is +.000 (.00 mm), -.125 (3.18 mm).
4. Tolerance on mounting dimensions is ±.016 (.41 mm). Mounting studs are symmetrically located.
5. Tolerance on terminal positioning dimensions is ±.125 (3.18 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part no. and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

© ENTIRE STANDARD REVISED

MS PART NO. MS90013-2

P A Army-ER Other Cust Navy-EC Air Force-85	TITLE INDUCTOR, POWER, TYPE TF4RX04HA005	MILITARY STANDARD MS90013
Procurement Specification MIL-T-27	SUPERSEDES	PAGE 1 OF 2

DD FORM 25 OCT 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0604-4

APPROVED 9 JUNE 1958 REVISED (A) 21 Sep 65 (8) 28 MAY 1981 (C) 20 MAY 1982

Reviewer user information is current as of the date of this document. For future activation of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing)
Army ¤ EL, MU
AF ¤ 11, 85, 17 @ 19, 14
Navy ¤ WP, SH @ MC

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing)
AF ☒ 11, 85, 17 @ 19, 14 Army ☒ EL, MU Navy ☒ WP, SH @ MC

FED SUP CLASS
5950

ELECTRICAL RATING

Inductance:
(1–4) - 16 h min
(1–3) and (2–4) - - - - - - - - - - - - - - 4 h min
Current:
(1–4) - .125 amp dc
(1–3) and (2–4) - - - - - - - - - - - - - - .250 amp dc
Voltage.
(1–4) - 630 v rms
(1–3) and (2–4) - - - - - - - - - - - - - - 315 v rms
Frequency - - - - - - - - - - - - - - - - - - 120 cps, ±10%

DC resistance
(1–2) - 145 ohms, ±10%
(3–4) - 185 ohms, ±10%
Duty cycle - - - - - - - - - - - - - - - - - - Continuous
Life expectancy - - - - - - - - - - - - - - - 10,000 hr min
Max working voltage
(1–4) - 2,000 v
(3–4) - 2,000 v
Altitude - - - - - - - - - - - - - - - - - - - 10,000 ft max
Operating temperature - - - - - - - - - - 105° C max

Note When numbers in parentheses, eg (1–2), are used, they indicate the winding and the extreme terminals of the winding. When the extreme terminals of both windings are used, eg (1–4), the windings are connected in series, ie, terminals 2 and 3 are connected. When the extreme terminal of one winding and the extreme terminal of another winding are used, eg (1–3) and (2–4), the windings are connected in parallel.

PHYSICAL CHARACTERISTICS

Case size - - - - - - - - - - - - - - - - - - HA
Weight - 4-1/4 lb max
Terminals - - - - - - - - - - - - - - - - - - Solder lug, No. 18 AWG
Terminal height - - - - - - - - - - - - - - .750 (19.05 mm) +.000, –.312 (7.92 mm)
Shock - Method I, test condition C (50 G)

TEST	ELECTRICAL PROPERTIES			LIMITS
Dielectric withstanding voltage At sea level	Windings	(1–2)	(3–4)	- - -
	Volts rms	3,800	3,800	
DC resistance and resistive unbalance	(1–2) 145 ohms (3–4). 185 ohms Resistive unbalance not applicable			±10% ±10%
Inductance and inductive unbalance	With 50 v, 120 cps, and .125 amp dc applied to (1–4). 16 h With 50 v, 120 cps, and .250 amp dc applied to (1–3) and (2–4) 4 h Inductive unbalance not applicable			Min Min
Polarity	Additive, with terminals 2 and 3 connected			- - -
Temperature rise	40° C with 630 v, 108 cps, and .125 amp dc applied to (1–4) at an ambient temperature of 65° C			Max

© QUALITY ASSURANCE PROVISIONS:
QUALIFICATION INSPECTION: NOT APPLICABLE FOR THIS SPECIFICATION

QUALITY CONFORMANCE INSPECTION: GROUP A AND B TESTS OF MIL-T-27 SHALL BE APPLICABLE.

APPROVED 9 JUNE 1958 REVISED (A) FOR CHANGES SEE PG 1 (B) FOR CHANGES SEE PG 1 (C) SEE PG. 2 FOR CHANGES 20MAY1982

PA Army-ER Other Cust Navy-EC Air Force-85	TITLE INDUCTOR, POWER, TYPE TF4RX04HA005	MILITARY STANDARD MS90013
Procurement Specification MIL-T-27	SUPERSEDES	PAGE 2 OF 2

DD FORM 25 OCT 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.