
MS9758 (ASG)

FED SUP CLASS 5305

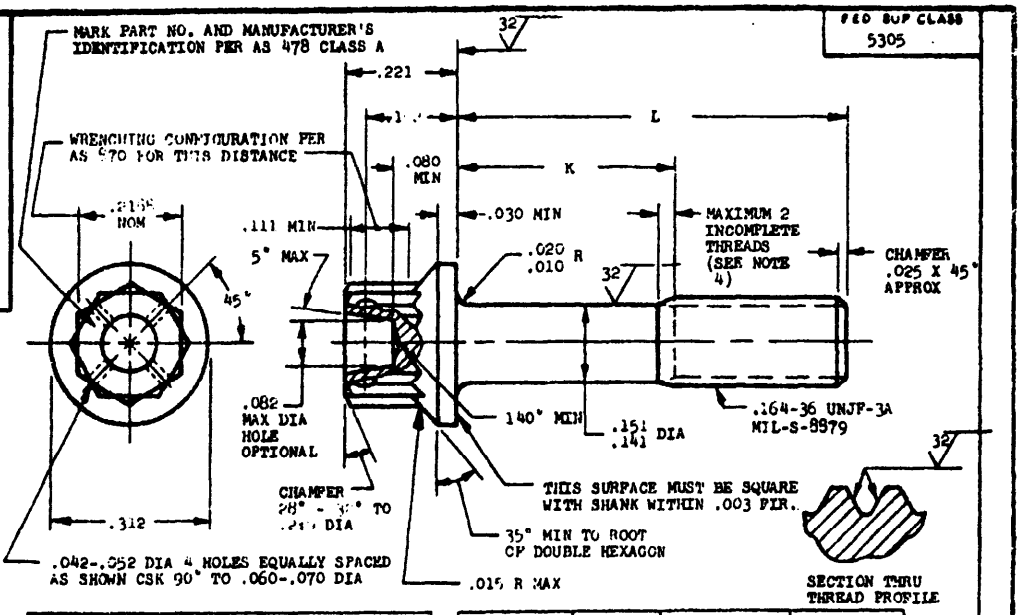

PART NO.	L	K	APPROX WEIGHT LB/100
MS9758-02	.250	.062-.082	.232
MS9758-03	.312	.062-.082	.246
MS9758-04	.375	.062-.082	.264
MS9758-05	.438	.062-.082	.281
MS9758-06	.500	.062-.082	.297
MS9758-07	.562	.062-.082	.314
MS9758-08	.625	.062-.082	.330
MS9758-09	.688	.062-.110	.347
MS9758-10	.750	.112-.172	.364
MS9758-11	.812	.174-.234	.380
MS9758-12	.875	.237-.297	.397
MS9758-13	.938	.300-.360	.414
MS9758-14	1.000	.362-.422	.430
MS9758-15	1.062	.425-.485	.447
MS9758-16	1.125	.487-.547	.463

PART NO.	L	K	APPROX WEIGHT LB/100
MS9758-17	1.188	.550- .610	.480
MS9758-18	1.250	.612- .672	.496
MS9758-19	1.312	.674- .734	.513
MS9758-20	1.375	.737- .797	.530
MS9758-21	1.438	.800- .860	.546
MS9758-22	1.500	.862- .922	.563
MS9758-23	1.562	.924- .984	.580
MS9758-24	1.625	.987-1.047	.596
MS9758-25	1.688	1.050-1.110	.613
MS9758-26	1.750	1.112-1.172	.629
MS9758-27	1.812	1.174-1.234	.646
MS9758-28	1.875	1.237-1.297	.662
MS9758-29	2.000	1.362-1.422	.696

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .005 FIR.
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .005 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: TITANIUM AMS 4967.
6. HARDNESS: ROCKWELL C30-42.
7. MANUFACTURING SPECIFICATION: AMS 7461, EXCEPT MATERIAL AS NOTED
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2644.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UNSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS CCC

P.A.	TITLE	MILITARY STANDARD
Other Cust: Navy - A	SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, TITANIUM AMS 4967, .164-36 UNJF-3A	MS9758 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: NASA-GE, DSC

APPROVED 3 Mar 69 REVISED

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:24Z
Check the source to verify that this is the current version before use.