MIL-E-1/1549A
9 March 1972
SUPERSEDING
MIL-E-1/1549
25 September 1964

MILITARY SPECIFICATION SHEET

ELECTRON TUBE, RECEIVING

TYPE 6BQ7A

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

DESCRIPTION: Twin triode, miniature, medium Mu

Outline	---	6-2 (EIA)
Base	---	E9-1
Envelope	---	T6-1/2
Cathode	---	Coated unipotential

Base connections:

Pin No.	---	1	2	3	4	5	6	7	8	9
Element	---	2a	2g	2k	h	h	1a	1g	1k	sd

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	Eb	Ec	Rk	Pp/a	Ik/k	Ehk	(A) Alt
Unit:	V	Vdc	Vdc	Ohms	W	mAdc	V	ft
Maximum:	6.9	275 Note 1	---	---	2.2	22	180	Note 2
Minimum:	5.7	---	---	---	---	---	---	---
TEST CONDITION:	6.3	150	0	220	---	---	---	---

GENERAL:

Qualification - Required

(A) denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:57Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1							
1266	Total grid current	Eb = 250 Vdc; Rk = 250 ohms; Rg = 0.5 Meg (see notes 3 and 4)	0.65	II	Ic	0	-2	µAdc
1256	Electrode current (1) (anode)	See note 5	0.65	II	Ib	6.0	13.0	mAdc
1306	Transconductance (1)	See note 5	0.65	II	Sm	5,600	7,800	µmhos
1231	Emission current	Eb = Ec = 10 Vdc; Rk = 0 (see note 6)	0.65	II	Is	30	---	mAdc
1201	Short and discontinuity detection		0.4	II	---	---	---	---
	Quality conformance inspection, part 2							
1256	Electrode current (2) (anode)	Ec = -15 Vdc; Rk = 0 (see note 5)	1.5	II	Ib	---	35	µAdc
1246	Audio frequency noise	Rp = 10,000 ohms: Ecal = 150 mVac; Ebb = 225 Vdc; Rk = 1,600 ohms (see note 4)	2.5	II	EB	---	17	vu
1306	Transconductance (2)	Ef = 5.7 V (see note 5)	4.0	II	Sm Ef	4,800	---	µmhos
1336	Heater-cathode leakage	Ehk = 200 Vdc (see note 5)	---	---	Ihk	---	20	µAdc
1301	Heater current		---	---	If	370	430	mA
1331	Direct-interelectrode capacitance	With external shield No. 315 (see note 7)	6.5	Code E	C1-in C2-in	2.05 4.10	3.15 5.90	pF pF
(A) 1121	Base strain		---	---	---	---	---	---
(A) 2126	Glass strain		4.0	I	---	---	---	---
1105	Permanence of marking		---	---	---	---	---	---
	Quality conformance inspection, part 3							
1501	Intermittent life	Group A (see note 8)	---	---	---	---	---	---
---	Intermittent life-test end point (500 hours)	Transconductance (1)	---	---	Sm	4,000	---	µmhos

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:57Z
Check the source to verify that this is the current version before use.

NOTES:

1. Under cutoff conditions, rf grounded grid circuits with direct coupled drive, it is permissible for Eb to be as high as 330 volts.
2. See "Reduced pressure (altitude) rating", and altitude, maximum peak voltage in the basic document.
3. This test to be performed at the conclusion of the holding period.
4. Tie 1a to 2a; 1g to 2g; 1k to 2k.
5. Test each unit separately; ground unit not under test.
6. Ground grid and anode of unit not under test, but float the cathode.
7. C2-in = C2k (h + 2g + internal shield + external shield); ground 2a, 1a, 1g, 1k. This is read as a radio frequency grounded grid amplifier.
8. Life test in the following circuit:

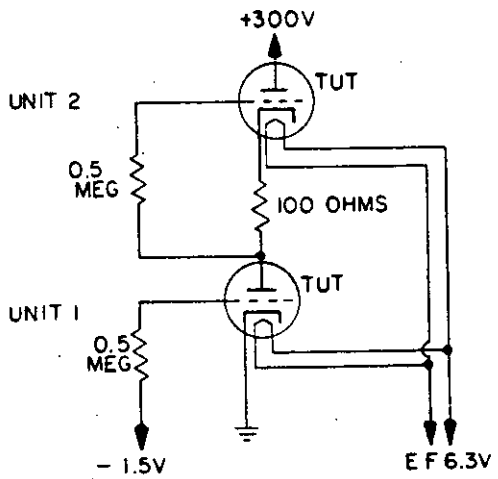

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Air Force - 17
DSA - ES

User activities:
Navy - AS, MC, CG, SH

Preparing activity: Army - EL

Agent: DSA - ES

(Project 5960-2547)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:57Z
Check the source to verify that this is the current version before use.