MILITARY SPECIFICATION SHEET


ELECTRON TUBE, STORAGE

TYPE 7571

This amendment forms a part of Military Specification Sheet MIL-E-1/1563, dated 15 December 1964, and is mandatory for use by all Departments and Agencies of the Department of Defense.

Page 2, LIMITS columnar, Dynamic range (1): Delete "5" from MAX column and insert "5" in MIN column.

Page 4, note 9: Delete figure and substitute the following figure.

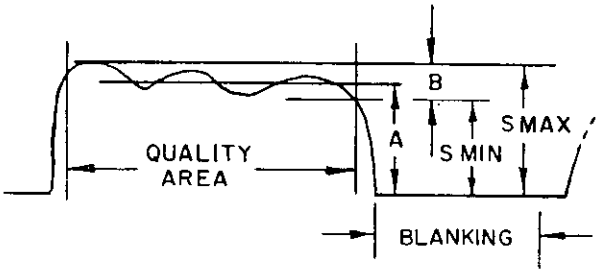

Page 5, note 9 (Cont), line 2: After "A = $\frac{\text{Smax. + Smin.}}{2}$" insert "= Average signal amplitude."

Page 8: Delete "Figure 1" and substitute the attached new "Figure 1."

Custodians:

Army - EL
Navy - SH
Air Force - 11

Review activities:

Army - EL
Navy - SH
Air Force - 11, 17, 85

User activities:

Army - MU
Navy - WP, MC, CG
Air Force - None


Preparing activity:

Navy - SH

(Project 5960-2084)

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:59Z
Check the source to verify that this is the current version before use.

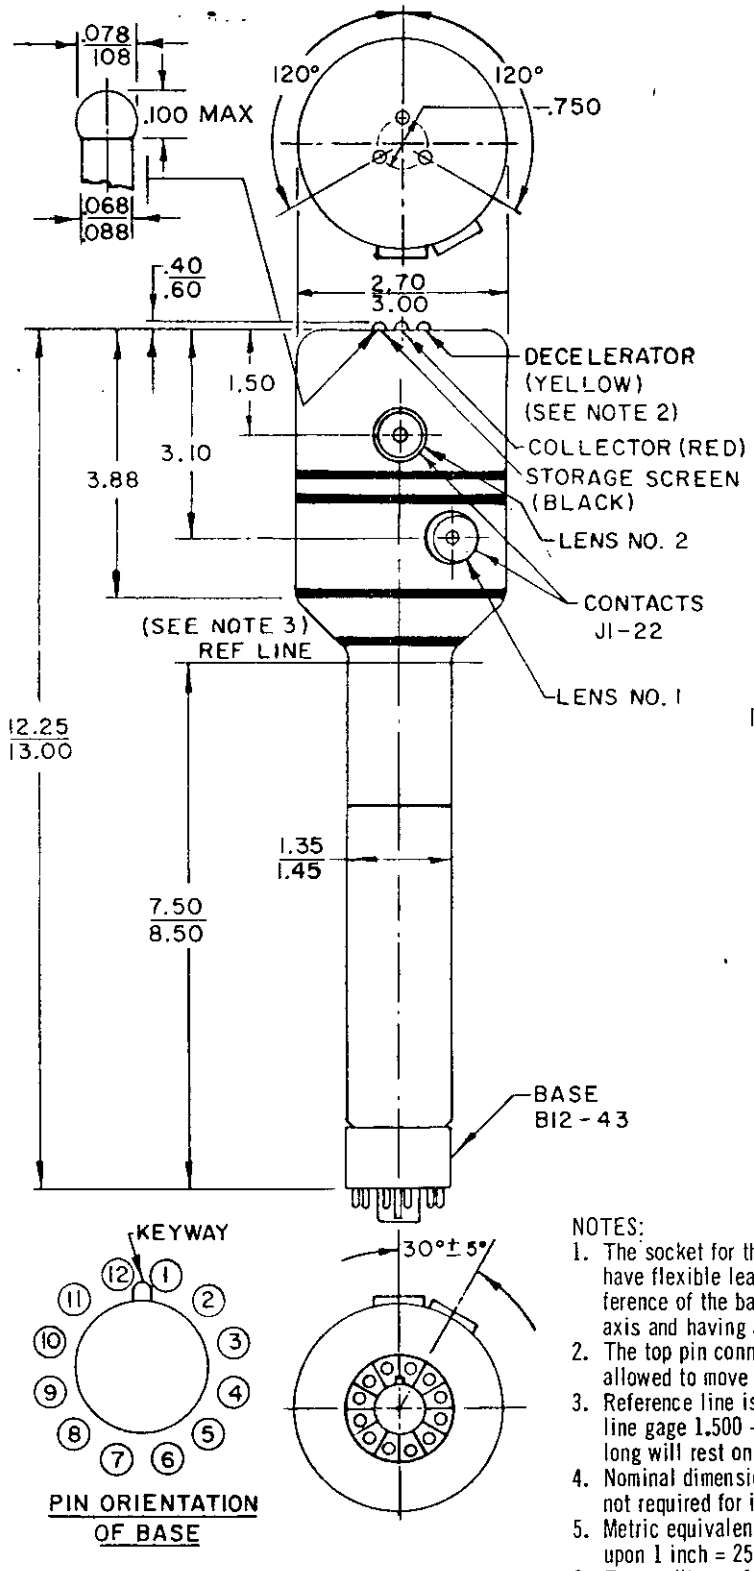

Pin no.	Element
1	Heater
2	Grid 1
3	No connection
4	Focus electrode (A2)
5	No connection
6	Anode (A1)
7	No connection
8	No connection
9	No connection
10	Grid 2
11	Cathode
12	Heater

INCHES	MM	INCHES	MM
.068	1.73	1.50	38.10
.078	1.98	2.70	68.58
.088	2.24	3.00	76.20
.100	2.54	3.100	78.74
.108	2.74	3.88	98.55
.400	10.17	7.50	190.50
.600	15.24	8.50	215.90
.75	19.05	12.25	311.15
1.35	34.29	13.00	330.20
1.45	36.83		

NOTES:
1. The socket for this base is not to be rigidly mounted. It must have flexible leads and must move freely. The bottom circumference of the base will fall within a circle concentric with cone axis and having a diameter of 2.00 (50.8) inches.
2. The top pin connections should have flexible leads and be allowed to move freely.
3. Reference line is determined by the position where a reference line gage 1.500 –.000 +.003 (38.10 –.00 +.08) ID and 2.00(50.8) long will rest on the bulb cone.
4. Nominal dimensions are for information purposes only and are not required for inspection purposes.
5. Metric equivalents are for general information only and are based upon 1 inch = 25.4 mm to the nearest .01 mm.
6. For quality conformance inspection, Part 2, dimensions are to be inspected with an AQL of 6.5 percent and an inspection level of L6.

Figure 1. Outline drawing of electron tube type 7571.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:59Z
Check the source to verify that this is the current version before use.