INCH-POUND
A-A-55601A
25 JANUARY 1996
SUPERSEDING
A-A-55601
9 DECEMBER 1994

COMMERCIAL ITEM DESCRIPTION

BEARINGS, ROLLER, CYLINDRICAL, SINGLE ROW OF ROLLERS, CYLINDRICAL INNER RING, TWO ROLLER RETAINING RIBS ON OUTER RING, NON - LOCATING

THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES


1. SCOPE: THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR CYLINDRICAL ROLLER BEARINGS, SINGLE ROW OF ROLLERS, TWO ROLLER RETAINING RIBS ON OUTER RING, CYLINDRICAL INNER RING, NON - LOCATING.

2. SALIENT CHARACTERISTICS.

2.1 MATERIAL:
- A. RINGS AND ROLLERS SHALL BE MADE OF CHROMIUM-ALLOY STEEL 52100 (UNS G52986) CONFORMING TO AMS 6440.
- B. HARDNESS OF RINGS AND ROLLERS: 58 TO 66 RC.
- C. CAGE MATERIAL SHALL BE SPECIFIED IN THE PART NUMBER AS FOLLOWS:
  - A= MANUFACTURER'S STANDARD
  - B= BRASS
  - M= MACHINED BRASS
  - N= NON-METALLIC
  - J= STEEL

2.2 TOLERANCE:
- A. RBEC-1, IN ACCORDANCE WITH ANSI/ABMA STANDARD 20.
- B. RADIAL INTERNAL CLEARANCE SHALL BE IN ACCORDANCE WITH ANSI/ABMA STANDARD 20 AND SHALL BE SPECIFIED IN THE PART NUMBER AS FOLLOWS:
  - C2= SYMBOL 2
  - C0= SYMBOL 0 (NORMAL)
  - C3= SYMBOL 3
  - C4= SYMBOL 4

2.3 BASIC LOAD RATINGS SHALL BE CALCULATED USING THE METHOD SPECIFIED IN ANSI/ABMA STANDARD 11.

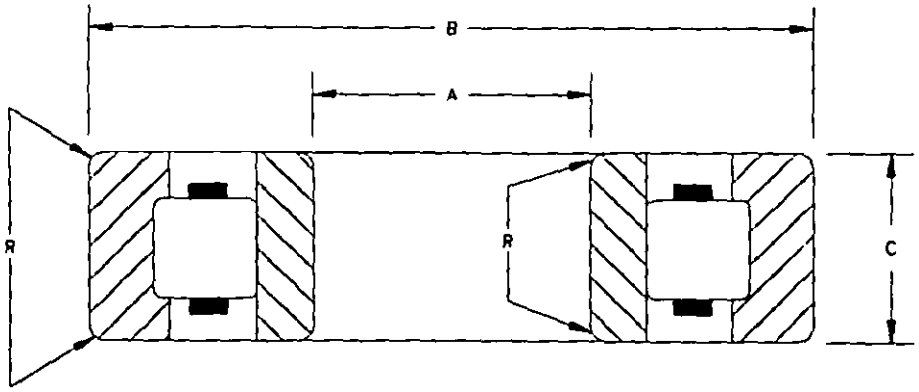

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER, ATTN: DISC-ECA, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO.	A BORE	B OUTSIDE DIA	C OVERALL WIDTH	R SHAFT & HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER		LOAD RATING		INTERCHANGEABLE SPECIFICATION
					SHAFT	HOUSING			
				MAX	MIN	MAX	DYNAMIC	STATIC	
01	17	40	12	.025	0.84	1.44	2500	1400	MS19076-1
02	20	47	14	.040	0.90	1.67	2900	1500	MS19076-2
03	20	52	15	.040	1.02	1.82	3500	1900	MS19076-3
04	25	52	15	.040	1.22	1.86	3000	1600	MS19076-4
05	25	62	17	.040	1.25	2.20	5100	2900	MS19076-5
06	30	62	16	.040	1.42	2.24	3950	2200	MS19076-6
07	30	72	19	.040	1.50	2.55	6750	3950	MS19076-7
08	35	72	17	.040	1.66	2.61	5900	3450	MS19076-8
09	35	80	21	.060	1.73	2.83	8850	5350	MS19076-9
10	40	80	18	.040	1.87	2.88	7650	4650	MS19076-10
11	40	90	23	.060	1.94	3.19	10300	6350	MS19076-11
12	45	85	19	.040	2.08	3.06	8050	5000	MS19076-12
13	45	100	25	.060	2.20	3.54	14200	9050	MS19076-13
14	50	110	27	.080	2.42	3.90	17000	11100	MS19076-14
15	55	100	21	.060	2.52	3.60	10300	6700	MS19076-15
16	55	120	29	.080	2.65	4.25	20700	13600	MS19076-16
17	60	110	22	.060	2.73	3.96	12600	8450	MS19076-17
18	60	130	31	.080	2.88	4.61	23200	15500	MS19076-18
19	65	120	23	.060	3.00	4.32	14900	10200	MS19076-19
20	65	140	33	.080	3.11	4.96	25600	17100	MS19076-20
21	70	125	24	.080	3.19	4.50	14800	10200	MS19076-21
22	70	150	35	.060	3.32	5.31	30100	20800	MS19076-22
23	75	130	25	.080	3.37	4.68	17000	12100	MS19076-23
24	75	160	37	.080	3.57	5.67	33300	25600	MS19076-24
25	80	140	26	.080	3.60	5.05	19600	13700	MS19076-25
26	80	170	39	.080	3.79	6.02	36500	25600	MS19076-26
27	85	150	28	.080	3.85	5.40	22400	15900	MS19076-27
28	85	180	41	.100	4.04	6.38	42900	30500	MS19076-28
29	90	160	30	.080	4.05	5.76	28000	20200	MS19076-29
30	90	160	40	.100	4.25	6.73	46500	33300	———
31	90	190	43	.100	4.25	6.73	46500	33300	MS19076-30
32	95	170	32	.080	4.29	6.12	31400	22800	MS19076-31
33	95	200	45	.100	4.54	7.09	53200	39100	MS19076-32
34	100	180	34	.080	4.56	6.48	34800	25600	MS19076-33
35	100	215	47	.100	4.83	7.62	61500	45900	MS19076-34
36	105	190	36	.080	4.77	6.84	38000	30000	MS19076-35
37	105	225	49	.100	5.05	7.97	69700	52400	MS19076-36
38	110	200	38	.080	5.01	7.20	45000	34000	MS19076-37
39	110	240	50	.100	5.37	8.50	79100	60300	MS19076-38
40	120	215	40	.080	5.47	7.74	49500	37500	MS19076-39
41	120	260	55	.100	5.82	9.21	93400	71100	MS19076-40
42	130	280	58	.120	6.32	9.92	110000	90100	MS19076-41
43	150	320	65	.120	7.11	11.34	133000	106000	MS19076-42

3. QUALITY CONFORMANCE PROVISIONS:

3.1. THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.

3.2 UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PART SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

4. NOTES:

4.1 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.

4.2 SNAP RINGS ARE OPTIONAL AND SHALL BE INDICATED BY ADDING AN R DESIGNATOR TO THE PART NUMBER.

4.3 THE PART IDENTIFICATION NUMBER(PIN) SHALL CONSIST OF THE BASIC COMMERCIAL ITEM DESCRIPTION NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I AND DESIGNATORS FOR CAGE AND RADIAL INTERNAL CLEARANCE.

EXAMPLE: AA55601-10JC3 R

- R — SNAP RING
- J — RADIAL INTERNAL CLEARANCE
- C — CAGE
- 3 — DASH NUMBER
- AA55601 — BASIC NUMBER

MILITARY INTERESTS:

CUSTODIANS

ARMY-AT
NAVY-OS

REVIEWER ACTIVITIES

MARINE CORPS-MC, NAVY-SH

PREPARING ACTIVITY:

DLA-IS

PROJECT NUMBER: 3110-1006

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:55Z
Check the source to verify that this is the currentversion before use.