INCH-POUND
A-A-55602A
25 JANUARY 1996
SUPERSEDING
A-A-55602
9 DECEMBER 1994

COMMERCIAL ITEM DESCRIPTION

BEARINGS, ROLLER, CYLINDRICAL, SINGLE ROW OF ROLLERS, TWO ROLLER RETAINING RIBS ON INNER RING, CYLINDRICAL OUTER RING, NON - LOCATING

THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES


1. SCOPE: THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR CYLINDRICAL ROLLER BEARINGS, SINGLE ROW OF ROLLERS, TWO ROLLER RETAINING RIBS ON INNER RING, CYLINDRICAL OUTER RING, NON - LOCATING.

2. SALIENT CHARACTERISTICS.

2.1 MATERIAL:
A. RINGS AND ROLLERS SHALL BE MADE OF CHROMIUM-ALLOY STEEL 52100 (UNS G52986) CONFORMING TO AMS 6440.
B. HARDNESS OF RINGS AND ROLLERS: 58 TO 66 RC.
C. CAGE MATERIAL SHALL BE SPECIFIED IN THE PART NUMBER AS FOLLOWS:
A= MANUFACTURER'S STANDARD
B= BRASS
M= MACHINED BRASS
N= NON-METALLIC
J= STEEL

2.2 TOLERANCE:
A. RBEC-1, IN ACCORDANCE WITH ANSI/ABMA STANDARD 20.
B. RADIAL INTERNAL CLEARANCE SHALL BE IN ACCORDANCE WITH ANSI/ABMA STANDARD 20 AND SHALL BE SPECIFIED IN THE PART NUMBER AS FOLLOWS:
C2= SYMBOL 2
C0= SYMBOL 0 (NORMAL)
C3= SYMBOL 3
C4= SYMBOL 4

2.3 BASIC LOAD RATINGS SHALL BE CALCULATED USING THE METHOD SPECIFIED IN ANSI/ABMA STANDARD 11.

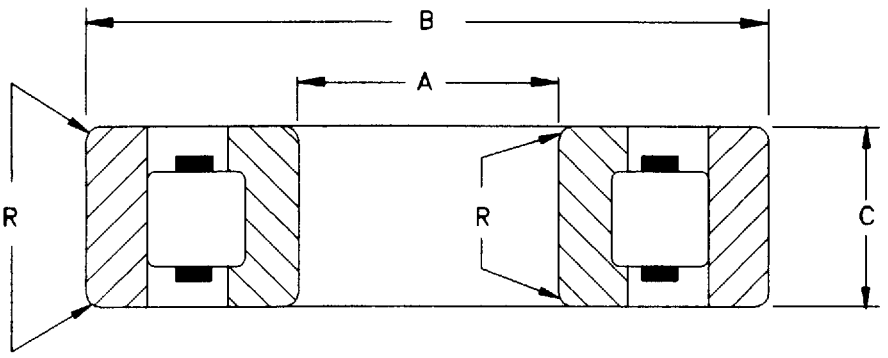

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER. ATTN: DISC-ECA, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO.	A BORE	B OUTSIDE DIA	C OVERALL WIDTH	R SHAFT & HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER		LOAD RATING Lbf		INTERCHANGEABLE SPECIFICATION
					SHAFT	HOUSING			
				MAX	MIN	MAX	DYNAMIC	STATIC	
01	17	40	12	.025	0.84	1.44	2500	1400	MS19074-1
02	17	47	14	.040	0.90	1.67	2900	1500	MS19074-2
03	20	52	15	.040	1.02	1.82	3500	1900	MS19074-3
04	25	52	15	.040	1.22	1.86	3000	1600	MS19074-4
05	25	62	17	.040	1.25	2.20	5100	2900	MS19074-5
06	30	62	16	.040	1.42	2.24	3950	2200	MS19074-6
07	30	72	19	.059	1.50	2.55	6750	3950	MS19074-7
08	35	72	17	.059	1.56	2.61	5900	3450	MS19074-8
09	35	80	21	.079	1.73	2.83	8850	5350	MS19074-9
10	40	80	18	.059	1.87	2.88	7650	4650	MS19074-10
11	40	90	23	.060	1.94	3.19	10300	6350	MS19074-11
12	45	85	19	.079	2.08	3.06	8050	5000	MS19074-12
13	45	100	25	.079	2.20	3.54	14200	9050	MS19074-13
14	50	110	27	.080	2.42	3.90	17000	11100	MS19074-14
15	55	100	21	.079	2.52	3.60	10300	6700	MS19074-15
16	55	120	29	.080	2.65	4.25	20700	13600	MS19074-16
17	60	110	22	.080	2.73	3.96	12600	8450	MS19074-17
18	60	130	31	.080	2.88	4.61	23200	15500	MS19074-18
19	65	120	23	.080	3.00	4.32	14900	10200	MS19074-19
20	65	140	33	.080	3.11	4.96	25500	17100	MS19074-20
21	70	125	24	.080	3.19	4.50	14800	10200	MS19074-21
22	70	150	35	.080	3.32	5.31	30100	20800	MS19074-22
23	75	130	25	.080	3.37	4.68	17000	12100	MS19074-23
24	75	160	37	.080	3.57	5.67	33300	25600	MS19074-24
25	80	140	26	.080	3.60	5.05	19600	13700	MS19074-25
26	80	170	39	.080	3.79	6.02	36500	25600	MS19074-26
27	85	150	28	.080	3.85	5.40	22400	15900	MS19074-27
28	85	180	41	.100	4.04	6.38	42900	30500	MS19074-28
29	90	160	30	.080	4.05	5.76	28000	20200	MS19074-29
30	90	190	43	.100	4.25	6.73	46500	33300	MS19074-30
31	95	170	32	.080	4.29	6.12	31400	22800	MS19074-31
32	95	200	45	.100	4.54	7.09	53200	39100	MS19074-32
33	100	180	34	.080	4.55	6.48	34800	25500	MS19074-33
34	100	215	47	.100	4.83	7.62	61500	45900	MS19074-34
35	105	190	36	.080	4.77	6.84	38000	30000	MS19074-35
36	105	225	49	.100	5.05	7.97	69700	52400	MS19074-36
37	110	200	38	.080	5.01	7.20	45000	34000	MS19074-37
38	110	240	50	.100	5.37	8.50	79100	60300	MS19074-38
39	120	215	40	.080	5.47	7.74	49500	37500	MS19074-39
48	120	260	55	.100	5.82	9.21	93400	71100	MS19074-40
40	130	280	58	.120	6.32	9.92	110000	90100	MS19074-41
41	150	320	65	.120	7.11	11.34	133000	106000	MS19074-42

3. QUALITY CONFORMANCE PROVISIONS:

3.1. THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.

3.2 UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PART SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

4. NOTES:

4.1 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.

4.2 SNAP RINGS ARE OPTIONAL AND SHALL BE INDICATED BY ADDING AN R DESIGNATOR TO THE PART NUMBER.

4.3 THE PART IDENTIFICATION NUMBER(PIN) SHALL CONSIST OF THE BASIC COMMERCIAL ITEM DESCRIPTION NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I AND DESIGNATORS FOR CAGE AND RADIAL INTERNAL CLEARANCE.

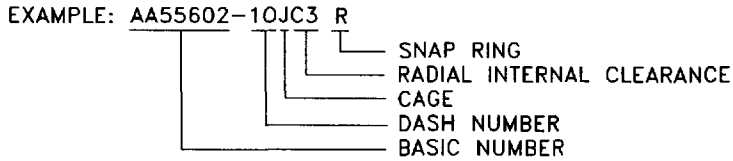

MILITARY INTERESTS:

CUSTODIANS

ARMY-AT
NAVY-OS

REVIEWER ACTIVITIES

MARINE CORPS-MC, NAVY-SH

PREPARING ACTIVITY:

DLA-IS

PROJECT NUMBER: 3110-1007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.