INCH-POUND

A-A-55606
21 August 1995
SUPERSEDING
MIL-A-3777A
13 June 1958

COMMERCIAL ITEM DESCRIPTION

ANCHOR, GUY, AND RODS, ANCHOR

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE: This commercial item description (CID) depicts the requirements for guy anchors and anchor rods for use in pole line tower construction.

2. SALIENT CHARACTERISTICS:

2.1 Material. The material shall be UNS G10350 steel in accordance with ASTM A29.

2.2 Finish. Guy anchors and anchor rods shall be hot-dip galvanized in accordance with ASTM A153.

2.3 Threads. Anchor rod threads shall conform to FED-STD-H28/2. Rods for plate anchors shall be threaded a minimum of 3.5 inches. Rods with separate eyes shall be threaded a minimum of 1.5 inches.

2.4 Nut. A nut shall be included with each rod anchors from Table 6.

2.5 Nut and Bolt. A high strength nut and bolt shall be included with each extension and guy adapter from Table 7.

2.6 Dimensions. Dimensions shall be described in Tables 1, 2, 3, 4, 5, 6, and 7.

3. QUALITY ASSURANCE PROVISIONS:

3.1 The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document.

3.2 Upon request, the supplier will certify with documented test/inspection evidence, that the part supplied meets the requirements of this document.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: Director, US Army Research Laboratory, Physical Sciences Directorate, ATTN: AMSRL-PS-DC, Fort Monmouth, NJ 07703-5601

DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

Table 1. Plate Anchors

Part Code	Hole Size	Rod Diameter	Anchor Area	Plate Type
1A	6	5/8	70	Expanding Plate
1B	8	5/8,3/4	135	
1C	10	3/4, 1	200	
1D	12	1, 1-1/4	300	
1E	16	5/8, 3/4	150	Cross Plate
1F	20	5/8, 3/4, 1	250	
1G	24	5/8, 3/4, 1, 1-1/4	400	

Table 2. Screw Anchors, No Wrench, Triple Strand Eye.

Part Code	Helix Diameter	Rod Diameter	Torque Capacity	Rod Length
2A	4	3/4	400	54
2B	6	3/4	400	66
2C	8	1	1000	66
2D	10	1-1/4	2300	66
2E	10	1-1/4	2300	96
2F	14	1-1/4	2300	96

Table 3. Screw Anchors, Power Installed, Square Core.

Part Code	Helix Diameter	Rod Diameter	Torque Capacity	Core Size
3A	8	5/8, 3/4, 1	5000	1-3/8
3B	10	5/8, 3/4, 1		
3C	12	3/4, 1		
3D	8	5/8, 3/4, 1	6000	
3E	10	5/8, 3/4, 1		
3F	12	5/8, 3/4, 1		
3G	14	3/4, 1		
3H	8	3/4, 1	7000	1-1/2
3J	10			
3K	8	3/4, 1	10000	
3L	10			
3M	12			
3N	14			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

Table 4. Screw Anchors, Power Installed, Multiple Helix

Part Code	Helix Combinations	Length	Rod Diameter	Torque Capacity
4A 4B	8, 10 8, 10, 12	84	1-1/4 Round	2300
4C 4D	8, 10 10, 12	60	1-1/2 Square	5500
4E 4F	8, 10, 12 10, 12, 14	84		
4G	10, 12, 14, 14	120		

Table 5. Rock Anchors, Split Wedge, Triple Strand Eye.

Part Code	Hole Size	Rod Diameter	Rod Length
5A	1-3/4	3/4	15, 30, 53, 72, 84, 96
5B	2-1/4	1	

Table 6. Anchor Rods.

Part Code	Diameter Combinations	Length	Eye Strands	Style
6A 6B 6C 6D 6E	1/2 5/8 3/4 1 1-1/4	60, 72, 84 60, 72, 84, 96 84, 96, 108 96, 120 120	Single Single, Double Single, Double, Triple Single, Double, Triple Triple	Forged Eye, for Plate Anchors
6F 6G 6H	5/8 3/4 1	42, 84	Single, Double, Triple	Separate Eyenut, for Anchors from Table 3

Table 7. Extension and Guy Adapters.
(For use with anchors from Table 4.)

Part Code	Type	Length	Eye Strands
7A	Extension with bolt	42, 60, 84, 120	N/A
7B	Adapter with bolt	18	Single, Double, Triple

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:55Z
Check the source to verify that this is the current version before use.


4. NOTES:

4.1 All dimensions are in inches.

4.2 All torque specifications are for guidance only.

4.3 The part identification number (PIN) shall consist of the basic CID number followed by a dash number taken from Table 1, 2, 3, 4, 5, 6 or 7 followed by a Diameter code, a Length code, or Eye strand code when choices are given.

Example:

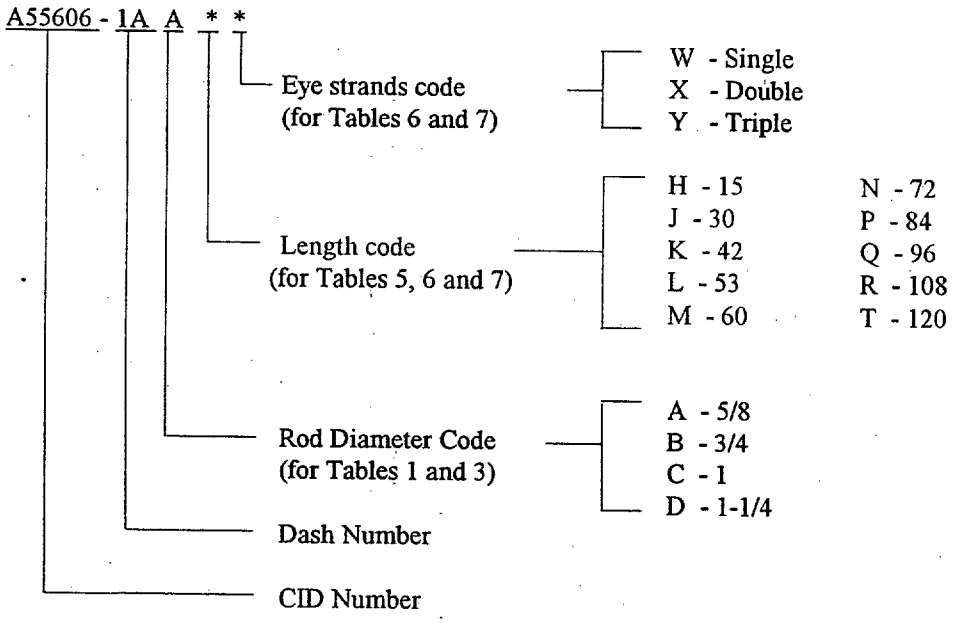

MILITARY INTERESTS:

Custodians:
Army - ER
Navy - YD1
Air Force - 99

Reviewer:
Army - AV
Navy - SA
DLA - IS

Preparing Activity:
Army - ER

Agent:
DLA - IS

(Project 4030-0245)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.