MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, FLEXIBLE, COAXIAL, PULSE, 48 OHMS, M17/21-RG26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable described herein shall consist of this specification and the latest issue of MIL-C-17.

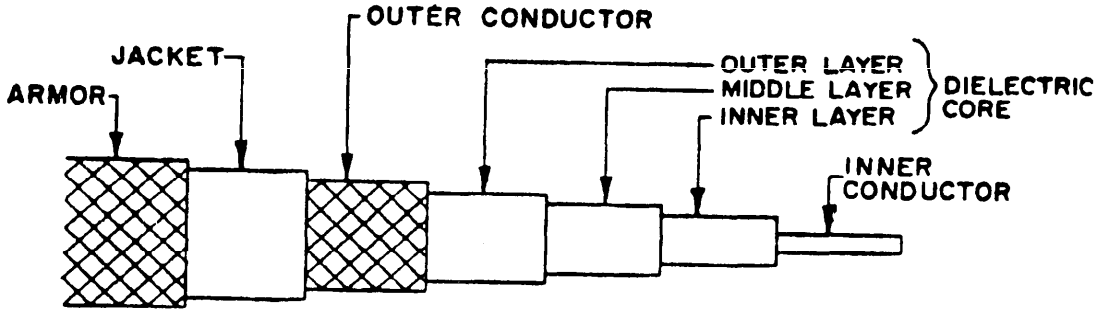


FIGURE 1. Configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:59Z
Check the source to verify that this is the current version before use.

TABLE I. Description.

Component	Construction details
Inner conductor	Nineteen strands of tinned, copper wire, each strand .0117 inch diameter. Overall diameter: .0585 inch ±.0020.
Dielectric core: Inner layer Middle layer Outer layer	Type E: Composite of three layers. Type H: Semiconducting synthetic rubber. Diameter: .090 inch ±.010. Type W: Insulating rubber. Diameter: .248 inch ±.010. Type Q: Insulating neoprene rubber. Colored red. Diameter: .288 inch ±.010.
Outer conductor	Single braid of AWG No. 34, tinned, copper wire. Diameter: .330 inch maximum. Coverage: 97.5% nominal Carriers: 16 Ends: 10 Picks/inch: 11.7 ±10%
Jacket	Type IV: Diameter: .425 inch ±.015.
Armor	Single braid of aluminum-alloy wire. Diameter: .505 inch, maximum.

ENGINEERING INFORMATION:

Continuous working voltage: 7,500 V rms, maximum.

Operating frequency: 1 MHz, maximum.

Velocity of propagation: 49.5 percent, nominal.

Operating temperature range: -40°C to +85°C.

Inner conductor properties:

DC resistance (maximum at 20°C): .482 ohm per 100 feet.

Elongation: 15 percent, minimum.

Ⓒ Tensile strength: Not applicable.

Engineering note: This cable useful in pulse low temperature applications (see connector per MIL-C-3607).

REQUIREMENTS:

Dimensions, configuration, and description: See figure 1 and table I.

Environmental and mechanical:

Ⓒ Visual and mechanical inspection:

Out-of-roundness: Not applicable.

Eccentricity: Not applicable.

Adhesion of conductors:

Inner conductor to core: 4 pounds, minimum; 8 pounds, maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:59Z
Check the source to verify that this is the current version before use.

Aging stability: +98°C ±2°C.

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

(C) Cold bend: -40°C ±2°C.

Dimensional stability: +85°C ±2°C.

Inner conductor from core: .062 inch, maximum.

Inner conductor from jacket: .125 inch, maximum.

Contamination: Not applicable.

Bendability: Not applicable.

Flammability: Not applicable.

Weight: 21 pounds per 100 feet, maximum.

Electrical:

(C) Continuity: Applicable.

Spark test: 6,000 Vrms, +10%, -0%.

Voltage withstanding: 12,000 V rms, +10%, -0%.

Insulation resistance: 500 megohms, minimum.

Corona extinction voltage: 10,000 V rms, minimum.

Characteristic impedance: 48 ohms ±4.

Attenuation: 0.7 dB per 100 feet, maximum, at 1 MHz.

Structural return loss: Not applicable.

Capacitance: 55 pF per foot, maximum.

(C) Capacitance stability: Not applicable.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Part number: See table II.

Supersession data: See table II.

TABLE II. Cross-reference of part number.

Part number	Superseded part number or type designation
M17/21-RG26	RG26A/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, TD
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 6145-0911<3)

Source: https://assist.dla.mil -- Downloaded: 2026<10-15T15:59Z
Check the source to verify that this is the current version before use.