INCH-POUND
MIL-DTL-82929A(OS)
13 September 2000
SUPERSEDING
MIL-I-82929(OS)
18 August 1994

DETAIL SPECIFICATION

INITIATOR, EXPLOSIVE ACTUATED, JAU-24/A

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. Scope.

1.1 Scope. This specification covers the requirements for the manufacture and acceptance of the JAU-24/A Explosive Actuated Initiator, referred to herein as "initiator".

2. Applicable Documents.

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents specified in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-P-20444	Primer, Percussion, M42 Parts for and Loading, Assembling and Packing
MIL-D-21625	Design and Evaluation of Cartridges for Cartridge Actuated Devices

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Standardization Team (Code 840M), 101 Strauss Avenue, Indian Head, MD 20640-5035 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by sending a letter.

AMSC N/A FSC 1377

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-810	Environmental Engineering Considerations and Laboratory Tests
MIL-STD-1168	Ammunition Lot Numbering and Ammunition Data Cards

(Unless otherwise indicated, copies of federal and Department of Defense specifications and standards are available from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

SPECIFICATIONS

Naval Sea Systems Command (CAGE Code 53711)

WS 21535	Ignition Device, (Percussion), PVU-1/A

(Application for copies should be addressed to Commander, Naval Surface Warfare Center, Indian Head Division, 101 Strauss Avenue, Data Control Branch (Code 8410), Indian Head, MD 20640-5035.)

DRAWINGS

Naval Air Systems Command (CAGE Code 30003)

DL 850AS133	Initiator, Explosive Actuated, JAU-24/A
850AS821	Test Fixture Initiators, Explosive Actuated, JAU-23/A and JAU-24/A
850AS825	Vibration Fixture, Initiators, Explosive Actuated, JAU-23/A and JAU-24/A
851AS110	Ignition Device (Percussion), PVU-1/A

(Application for copies should be addressed to Commander, Naval Surface Warfare Center, Indian Head Division, 101 Strauss Avenue, Data Control Branch (Code 8410), Indian Head, MD 20640-5035.)

2.3 Non-Government publications and drawings. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

ASTM E 545	Standard Method for Determining Image Quality in Direct Thermal Neutron Radiographic Examination
ASTM E 1742	Standard Practice for Radiographic Examination

(Application for copies of ASTMs should be addressed to the American Society for Testing and Materials, 1916 Race street, Philadelphia, PA 19103-1187.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE AS 5604	Compass, Magnetic, Pilot's Standby

(Application for copies should be addressed to the Society of Automotive Engineers International, 400 Commonwealth Drive, Warrendale, PA 15096-001.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to the first article inspection (see 4.2.1 and 6.4).

3.2 Primary components. Only one lot of primary components shall be used in each lot of initiators, although, a primary component lot may be used in more than one initiator lot. The initiator lot shall contain only one delay cartridge assembly lot manufactured within 12 months of completed initiator lot assemblies.

3.2.1. SCOT P/N 6078100. The primary components for the initiator, SCOT P/N 6078100, are the PVU-1/A ignition device, the ignition powder, the delay mix, the propellant charge, the lead azide and the hexanitrostilbene (HNS) contained in the initiator cartridge P/N 6078150.

3.2.1.1 PVU-1/A ignition device. The PVU-1/A ignition device used in the initiator, SCOT P/N 6078100, shall be furnished from lots manufactured within the past 24 months or have been recertified within the past 12 months. The ignition device shall be manufactured in accordance with Drawing 851AS110 and shall be from lots which are accepted in accordance with product specification WS 21535. The PVU-1/A ignition device shall be free of the following defects when examined by x-ray: missing or abnormally thin charge; charge broken, cracked or porous, cracked or off-center anvil or other misplaced or deformed inert parts; anvil abnormally close to cup dome; and any other observable defects in assembly.

3.2.2 Teledyne P/N 818307-105. The primary components for the initiator TELEDYNE P/N 818307-105 are the M42C2-793 percussion primer, the explosive mix, the delay fuse, the delay mix and the booster charge.

3.2.2.1 M42C2-793 percussion primer. The M42C2-793 percussion primer used in the TELEDYNE P/N 818307-105, shall be manufactured and tested in accordance with MIL-P-20444. The primers shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

be loaded into the initiators within 24 months of new primer acceptance testing or 12 months of primer recertification testing.

3.3 Initiator production. The initiators shall be manufactured in accordance with DL 850AS133 and the documents listed thereon. Each production delay cartridge assembly and initiator shall meet the requirements of 3.3.1 through 3.3.1.4 and 3.3.2 through 3.3.2.3, respectively. Failure of any delay cartridge or initiator to meet the applicable requirements of 3.3 shall result in rejection of that unit, or, in the case of cartridge output gap testing, shall result in rejection of the cartridge lot.

3.3.1 Delay cartridge assembly (SCOT P/N 6078150 or Teledyne P/N 818570-5) inspection.

3.3.1.1 Cartridge output gap. Cartridges shall detonate the test tip high order when tested as described in 4.3.1.

3.3.1.2 Visual inspection. All delay cartridge assemblies manufactured under contract shall be visually inspected and screened for defects as outlined in 4.3.2.1.

3.3.1.3 Leakage. Delay cartridge assemblies shall not exhibit a leak rate in excess of 1 X 10^{-5} standard cubic centimeters per second of air when tested in accordance with 4.3.3.

3.3.1.4 Radiographic inspection. The delay cartridge assemblies shall show proper assembly, presence of parts, sealing, presence of delay and explosive mixes, non-metal parts, and the proper assembly of pyrotechnic/non-metallic materials when examined radiographically in accordance with 4.3.4.1.

3.3.2 Initiator inspection.

3.3.2.1 Visual inspection. All initiators manufactured under contract shall be visually inspected and screened for defects as outlined in 4.3.2.1.

3.3.2.2 Radiographic inspection. Initiators shall show proper assembly, presence of parts, sealing, and presence of delay cartridge assembly when examined radiographically in accordance with 4.3.4.2.

3.3.2.3 Demagnetization. Initiators shall not deflect an approved Pilot's standby compass more than three degrees in either direction when passed in front of the compass. The initiators shall be tested in accordance with 4.3.5.

3.3.2.4 Electrical bonding. The bonding resistance of the initiator shall not be greater than 0.0025 ohm when tested in accordance with 4.3.6.

3.3.2.5 Threaded joint torque. Initiator components which form a threaded joint and contain provisions for the attachment of SMDC shall be capable of withstanding a break away torque of 150 in-lbs minimum (no movement of parts) when tested in accordance with 4.3.7.

3.4 Initiator performance. Initiators shall be capable of meeting all requirements of 3.4.1 through 3.4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

3.4.1 Vibration. There shall be no evidence of deformation or derangement of components. The initiator shall not autoignite, shall be safe to handle, and shall meet the requirements of 3.3.2.2 and 3.4.4 following vibration testing of 4.3.8.

3.4.2 Temperature and humidity (T & H) cycling. The initiators shall meet the requirments of 3.3.2.2 and 3.4.4 after being exposed to the T & H cycle in accordance with 4.3.9.

3.4.3 Shock. The initiators shall meet the requirements of 3.3.2.2 and 3.4.4 following shock testing of 4.3.10.

3.4.4 Ballistic requirements. Initiator(s) shall meet the requirements of 3.4.4.1 through 3.4.4.3 when tested in accordance with 4.3.11.

3.4.4.1 Ignition delay. The upper (U) and lower (L) limits for ignition delay shall be U= 351 milliseconds and L= 249 milliseconds when evaluated in accordance with 4.3.11.1.

3.4.4.2 High order detonation. The minimum plate dent for high order detonation of the output SMDC test tip on the aluminum witness plate shall be 0.001 inch when evaluated in accordance with 4.3.11.2.

3.4.4.3 Misfire. There shall be no misfires.

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1)
b. Production inspection (see 4.2.2)
c. Lot acceptance inspection (see 4.2.3)

4.2 Inspections.

4.2.1 First article inspection. Before entering into quantity production, an acceptable first article sample of 38 initiators shall be prepared using the same procedures and methods proposed for the production lot. A first article sample acceptable for functional and environmental testing shall be defined as a sample which has met the applicable requirements of 3.2 through 3.3 of this specification. Thirty-six of these initiators shall be expended in the tests listed in table I and two shall be retained for investigative purposes. The contractor shall deliver the initiators to the activity designated by the contracting agency for tests. Any damage inflicted by the environmental treatments, which would adversely affect the performance of the item in service application shall cause rejection of the first article sample. Any further production prior to notification by the contracting agency of first article sample acceptability shall be at the contractor's risk. Failure of any initiator to comply with the requirements of section 3 shall be cause for rejection of the first article represented.

4.2.2 Production inspection. All production delay cartridge assemblies and initiators manufactured under contract shall be inspected and screened to requirements specified in 3.2 through 3.3. Any unit failing to meet the requirements listed in 3.2 through 3.3 shall be rejected and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

4.2.3 Lot acceptance inspection. Lot acceptance inspection shall consist of the examinations and tests specified in table II. Failure of any sample initiator to comply with the requirements listed in table II shall be cause for rejection of the lot represented.

TABLE I. First article test plan.

Test Sequence	Requirement Paragraph	Test Paragraph	Sample Group				
			I	II	III	IV	V
Visual	3.3.2.1	4.3.2	6	12	6	12	2
Radiographic	3.3.2.2	4.3.4.2	6	12	6	12	2
Electrical Bonding	3.3.2.4	4.3.6	6	12	6	12	2
Threaded Joint Torque	3.3.2.5	4.3.7	6	12	6	12	2
Vibration	3.4.1	4.3.8	6				
T & H Cycling	3.4.2	4.3.9		12			
Shock	3.4.3	4.3.10			6		
Radiographic	3.3.2.2	4.3.4.2	6	12	6		
Ballistic test -65 ± 5°F 70 ± 5°F 200 ± 5°F	3.4.4	4.3.11	 2 2 2	 4 4 4	 2 2 2	 4 4 4	

TABLE II. Lot acceptance inspections and tests.

Inspection/Test	Requirement Paragraph	Test Paragraph	Quantity
Cartridge Output Gap Test*	3.3.1.1	4.3.1	Test sample
Visual	3.3.2.1	4.3.2	Test and retain sample
Radiographic	3.3.2.2	4.3.4.2	Test and retain sample
Electrical Bonding	3.3.2.4	4.3.6	Test and retain sample
Threaded Joint Torque	3.3.2.5	4.3.7	Test and retain sample
Ballistic test -65 ± 5°F 70 ± 5°F 200 ± 5°F	3.4.4	4.3.11	 1/3 test sample 1/3 test sample 1/3 test sample

*Subassembly test. Performed prior to initiator assembly.

4.2.3.1 Sample size. A random sample from each production lot, including the retained sample for investigative purposes, shall be selected in accordance with table III for lot acceptance inspection. Test sample initiators and initiators retained for investigative purposes shall not be applied as part of the quantity specified for delivery by the contract or purchase order.

TABLE III. Lot acceptance sampling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

Lot Size	Test Sample Size	Retained Sample Size	Cartridge Output Gap Test Sample
Up to 50	12	2	2
51 to 200	18	3	4
201 to 500	24	4	6

4.3 Inspections and tests.

4.3.1 Cartridge output gap test. Prior to assembly of initiators, a random sample of cartridges, selected per table III, shall be subjected to ambient temperature gap testing. Cartridge assembly explosive output shall be capable of detonating SMDC test tips across an air gap which is four times the maximum production gap of the initiator. Failure of any cartridge to meet the requirement of 3.3.1.1 shall result in rejection of the cartridge lot.

4.3.2 Visual inspections.

4.3.2.1 Initiator and delay cartridge assembly visual inspection. Each delay cartridge assembly and all assembled initiators shall be visually examined. Reject those with inadequate or illegible descriptive markings or serial numbers, dents, deep scratches, or other defects which may prevent proper installation or function.

4.3.2.2 Packaging inspection. The condition of the packaging (inner containers), packing (outer container), and markings shall be determined by comparison to the requirements of section 5.

4.3.3 Delay cartridge assembly leak test. Each delay cartridge assembly produced under contract shall be leak tested in a dry gas leak tester to determine conformance with 3.3.1.3. Units which exhibit a leak rate in excess of 1×10^{-5} standard cc/sec of air at a pressure differential of 1.0 ± 0.1 atmosphere shall be rejected.

4.3.4. Radiographic examination.

4.3.4.1 Delay cartridge assembly examination. Radiographic examination of delay cartridge assemblies shall include x-ray in accordance with ASTM E 1742 and n-ray in accordance with ASTM E 545. All delay cartridge assemblies shall be identified with serial numbers beginning with 001 prior to examination. The delay cartridge assemblies shall be arranged on trays or boards in consecutive numerical order with any missing serial numbers identified on the radiographic plate. The delay cartridge assemblies shall be positioned for the most revealing exposure with the long axis perpendicular to the radiographic beam. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4 x 6 inch region maximum. The radiographic identification shall include the drawing number, the complete lot number, the contract number, the DODIC, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the tests (see 6.2). Any observable imperfections as outlined in 3.3.1.4 shall be cause for rejection of the delay cartridge assemblies. Defective delay cartridge assemblies found during radiographic review are to be marked on the radiographic plate and removed from the production lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

4.3.4.2 Initiator examination. Radiographic examination of initiators shall include x-ray in accordance with ASTM E 1742. All initiators shall be identified with serial numbers beginning with 001 prior to examination. The initiators shall be arranged on trays or boards in consecutive numerical order with any missing serial numbers identified on the radiographic plate. The initiators shall be positioned for the most revealing exposure with the long axis perpendicular to the radiographic beam. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4 x 6 inch region maximum. The radiographic identification shall include the drawing number, the complete lot number in accordance with MIL-STD-1168, the contract number, the DODIC, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the tests (see 6.2). In addition, a marriage log indicating which delay cartridge serial number is installed in which initiator serial number shall be provided with radiographs. Any observable imperfections as outlined in 3.3.2.2 shall be cause for rejection of the delay cartridge assemblies. Defective delay cartridge assemblies found during radiographic review are to be marked on the radiographic plate and removed from the production lot.

4.3.5 Demagnetization. Each initiator shall be moved past a pilot's standby compass face (in accordance with SAE AS 5604) by placing the initiator six inches from the compass set in an east-west heading. The initiator and the compass shall be placed at the same height from the floor. The initiators shall be moved past the compass face in a longitudinal direction for its entire length, rotated 90 degrees in the horizontal position about it's longitudinal axis, and moved back past the compass face. This procedure shall be repeated for each 90 degrees rotation of the initiator. The initiator shall be acceptable if the requirements of 3.3.2.3 are met.

4.3.6 Electrical bonding. Sample initiators shall be electrically tested for resistance between the two end ports of the initiator using a calibrated milliohmeter. Failure of any initiator to comply with the requirements of 3.3.2.4 shall be cause for rejection of the lot and/or first article.

4.3.7 Threaded joint torque. Sample initiators shall be tested for breakaway torque of threaded joints using a calibrated torque wrench. Failure of any initiator to comply with the requirements of 3.3.2.5 shall be cause for rejection of the lot and/or first article.

4.3.8 Vibration test. All six initiators shall be tested as specified in 4.3.8.1 through 4.3.8.2.5. Failure of any initiator to comply with the requirements of 3.4.1 shall be cause for rejection of the lot and/or first article.

4.3.8.1 Non-gunfire vibration. The test shall be conducted in accordance with MIL-STD-810B, Table 514.1-I Curve "AT" except that for each cycling period the time shall be divided equally for vibration at −65, 70 and 200°F. The initiators shall be mounted in the vibration test fixture Drawing 850AS825 for the JAU-24/A initiator. The non-gunfire vibration test shall be performed on all six initiators. The six initiators shall be mounted on the test fixture at the same time and one shall be monitored for response during the test.

4.3.8.2 Gunfire vibration. The gunfire vibration test shall be performed on all six initiators, on each of the three orthogonal axes, and shall be conducted at 70°F test temperature only. The six initiators shall be mounted on the test fixture at the same time and one shall be monitored for response during the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

4.3.8.2.1 Resonance search. A resonance survey shall be conducted on each of the six initiators at 70°F in each of the three orthogonal axes. The frequency sweep shall be made from 50 Hz to 500 Hz and back to 50 Hz in approximately 7.50 minutes to the vibration test levels shown in table IV. The resonance points shall be noted. A resonance point is defined as a frequency which has a transmissibility (output/input) of two or greater. If more than three resonant points are noted from the resonance survey, only the three more severe will be used for resonance dwell vibration.

TABLE IV. Vibration test levels.

Frequency (Hz)	Acceleration or Amplitude
50 to 54	0.036 inch D.A.
55 to 210	± 5 G's
211 to 300	0.00222 inch D.A.
301 to 500	± 10 G's

4.3.8.2.2 Resonance dwell. The six initiators shall be vibrated in each of thee orthogonal axes at 70°F for 7.50 minutes at each resonant point (to a maximum of three) obtained during the resonance survey in 4.3.8.2.1 herein. The gunfire vibration test levels are shown in table IV depending upon the number of resonance frequencies determined in the resonance survey per 4.3.8.2. The remainder of the sweep time in accordance with table V shall be used for vibration cycling per 4.3.8.2.3 herein.

4.3.8.2.3 Vibration cycling. All six initiators shall be subjected to sinusoidal vibration cycling at 70°F for a period of time as specified in 4.3.8.2.2 on each of the three orthogonal axes with the frequency varying logarithmically from 50 Hz to 500 Hz and back to 50 Hz in approximately 7.50 minutes. The gunfire vibration test levels shall be shown in table IV.

4.3.8.2.4 Fixed dwell. After sinusoidal vibration cycling, the six initiators shall be subjected to a series of fixed dwells as shown in table V. The fixed narrow band dwells shall be performed by sweeping the frequency of ± 5 percent of the specified center frequency (e.g., the 100 Hz dwell should be performed from 95 to 105 Hz at the logarithmic sweep rate specified in 4.3.8.2.3).

4.3.8.2.5 Sinusoidal sweep. After completion of the fixed dwell testing, the six initiators shall be subjected to seven (7) sinusoidal vibration sweeps in each of the three orthogonal axes. The frequency shall vary logarithmically from 500 Hz to 2000 Hz and back to 500 Hz. The sweep cycling rate shall be as specified in 4.3.8.2.3 herein, with an applied input of ± 10 G's.

4.3.9 Temperature and humidity cycling. The temperature and humidity cycling test shall be conducted in accordance with MIL-D-21625F. Failure of any cartridge to comply with the requirements of 3.4.2 shall be cause for rejection of the lot or first article.

4.3.10 Shock test. The shock test shall be conducted in accordance with MIL-D-21625F. Failure of any initiator to comply with the requirements of 3.4.3 shall be cause for rejection of the lot or first article.

TABLE V. Gunfire sinusoidal vibration test schedule.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

Fixed Dwell (fd) at the following center frequencies	Number of Resonances			
	0	1	2	3
	Sweep Time			
	30	22.5	15.0	7.50
	Resonance Dwell Time			
	—	7.5	15.0	22.50
67 Hz	7.50	7.50	7.50	7.50
100 Hz	7.50	7.50	7.50	7.50
135 Hz	7.50	7.50	7.50	7.50
200 Hz	15.00	15.00	15.00	15.00
267 Hz	7.50	7.50	7.50	7.50
300 Hz	7.50	7.50	7.50	7.50
335 Hz	7.50	7.50	7.50	7.50
400 Hz	15.00	15.00	15.00	15.00
467 Hz	7.50	7.50	7.50	7.50
500 Hz	7.50	7.50	7.50	7.50
Total Time Each Axis	120.0	120.0	120.0	120.0

Note: When an equipment resonance occurs within 5% of a fixed dwell frequency, the fixed dwell period shall be omitted and only the resonance dwell performed. The omitted fixed dwell time shall then be added to the sweep time.

4.3.11 Ballistic test. Sample initiators shall be conditioned for a period not less than 4 hours nor more than 24 hours at the specified temperatures. The initiators shall be removed from the conditioning chamber and test fired within 3 minutes. If any initiator is not fired within 3 minutes after removal, it shall be reconditioned at the specified temperature for an additional 4 hours and then tested. The initiators shall be fired in the test fixture, Drawing 850AS821. See figure 1 for general test setup schematic. Instrumentation shall be provided to measure and record the initiator ignition delay and the high order detonation of the output shielded mild detonating cord (SMDC) test tip on the aluminum witness plate. The initiators shall meet the requirements specified in 3.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

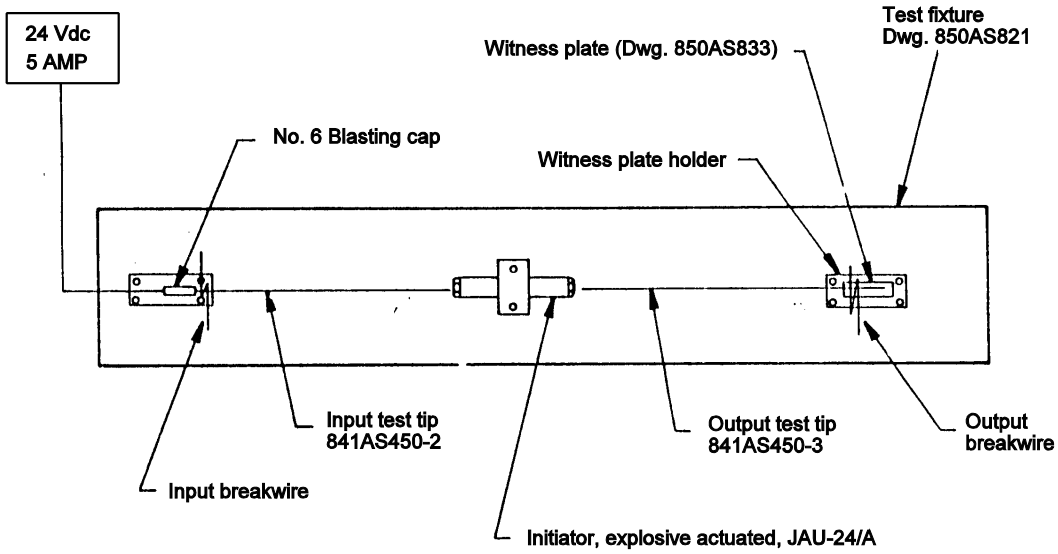


FIGURE 1. General test setup schematic.

4.3.11.1 Ignition delay. The ignition delay shall be measured from the initiation of the inlet SMDC test tip to the detonation of the outlet SMDC test tip. Each initiator shall meet the requirements of 3.4.4.1.

4.3.11.2 High order detonation. High order detonation of the output SMDC test tip shall be demonstrated in a 6061-T6 Aluminum witness plate. Each initiator shall meet the requirements of 3.4.4.2.

4.3.11.3 Misfire. An initiator that does not fire under the conditions specified in 4.3.11 shall be considered defective, and the lot shall be considered unacceptable, unless the misfire is clearly attributable to faulty test equipment or procedure. Each initiator shall meet the requirements of 3.4.4.3.

4.3.11.4 Test failure. If test failure is attributable to an assignable cause, excluding the test initiator, the original test results shall be discarded and that test reconducted.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The initiator, explosive actuated provides a nominal 0.3 second delay in the inter seat sequencing system of the FA-18B/D/F, T-45A and TAV-8B aircraft. As the initiator is designed only for these specific military aircraft, there is no commercial application for the JAU-24/A Explosive Actuated Initiator.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).

c. Production test activity and lot size.

d. Whether first article inspection is required and, if so, specify the test activity (see 3.1 and 4.2.1).

e. Directions for shipping radiographs of entire production lot and marriage log (report indicating cartridge serial number to initiator serial number), along with the ballistic sample to the activity conducting the production lot acceptance tests (see 4.3.4.1 and 4.3.4.2).

f. Marking if other than as specified (see 6.5.3.2).

g. That the safety requirements of the "Contractor's Safety Manual for Ammunition, Explosives and Related Dangerous Material" (DOD 4145.26M) are applicable (see 6.3).

6.3 Safety precautions. The safety precaution requirements of the contractor's Safety Manual for Ammunition and Explosives" (DOD 4145.26M), are applicable and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) 23.3.

6.4 First article. When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the items should be a first article sample or a sample selected from the first production items (see 3.1), and the number of items to be tested as specified in 4.2.1. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

6.5 Definition.

6.5.1 Level A packaging. The degree of preservation and packaging which will afford adequate protection against corrosion, deterioration, and physical damage during shipment, handling, indeterminate storage, and world-wide redistribution.

6.5.2 Preservation and packaging. Level A packaging should be used for all production lots for service use.

6.5.2.1 Inner container. One (1) initiator should be packed in a rigid hermetically sealed metal container which meets the requirements of MIL-C-10464, Type 1. Protective plugs in accordance with NAS 847 should be installed in the inlet and outlet ports on the initiator to afford protection. Adequate dunnage should be placed in the can to provide a tight pack and the can hermetically sealed.

6.5.2.2 Outer container. Initiators packaged as described in 6.5.2.1 should be packaged in a nailed wood box conforming to PPP-B-621, Class 2, Style 4 or 4 1/2 or in a cleated plywood box conforming to PPP-B-601, Overseas Type, Style A or B. Adequate dunnage should be provided to assure a tight pack.

6.5.3 Marking.

6.5.3.1 Special marking. Marking of outer containers shouldl be in accordance with Code of Federal Regulations 49 CFR 100-199.

6.5.3.2 Normal marking. Unless otherwise specified in the contract or purchase order (see 6.2), the marking on the inner, intermediate, and outer containers should be as specified below. The specified markings should be applied to the containers in accordance with the applicable provisions of MIL-STD-129.

a. Inner Container Marking

(1) NSN 1377-01-116-3148 and DODIC XW55
(2) Drawing 850AS133
(3) Initiator, Explosive Actuated, JAU-24/A
(4) Quantity
(5) Lot number in accordance with MIL-STD-1168

b. Outer pack Marking

(1) NSN 1377-01-116-3148 and DODIC XW55
(2) Drawing 850AS133
(3) Initiator, Explosive Actuated, JAU-24/A
(4) Quantity
(5) Gross weight and cube
(6) Lot number in accordance with MIL-STD-1168
(7) Contract/purchase order number
(8) WARNING: CARTRIDGES, POWER DEVICES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

(9) DOT Explosive Class
(10) UN Number
(11) Proper UN name
(12) Performance oriented packaging identification

6.5.4 Explanation of terms. For the purpose of this specification NAVSUPINST 4030.28, 1-4, 2-2, and 2-3, and Appendix A, when applicable, should be used to clarify packaging terms.

6.6 Subject term (key word) index.

Percussion
Powder
Primer
Propellant

6.7 Changes from previous issue. Marginal notations are not used to identify changes with respect to the previous issue because of the extensiveness of the changes.

Preparing Activity
Navy - OS
(Project 1377-0142)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-82929A	2. DOCUMENT DATE (YYMMDD) 13 September 2000

3. DOCUMENT TITLE
INITIATOR, EXPLOSIVE ACTUATED, JAU-24/A

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
C. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) DSN (*If applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME Commander, Indian Head Division Naval Surface Warfare Center	b. TELEPHONE (*Include Area Code*) (1) Commercial 301-744-4700 (2) DSN 354-4700
c. ADDRESS (*Include Zip Code*) Standardization Team (Code 840M) 101 Strauss Avenue Indian Head, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort belvoir, VA 22060-6221 Telephone (703) 767-6888 DSN 427-6888

DD FORM 1426, FEB 1999 (EG) PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:31Z
Check the source to verify that this is the current version before use.