
MILITARY SPECIFICATION SHEET

FUSES, INSTRUMENT TYPE, STYLE FM01 (INDICATING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuses described herein shall consist of this document and the latest issue of MIL-F-23419.

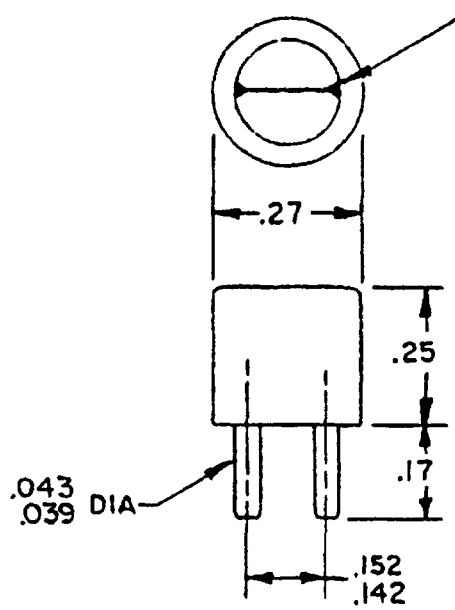

INCHES	MM
.039	.99
.043	1.09
.142	3.61
.152	3.86
.17	4.3
.25	6.4
.27	6.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.02 (.5 mm)

FIGURE 1. Style FM01 fuses.

(H) denotes change

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure 1
Applicable fuseholder:	MIL-F-19207/26, Type FHN42W
Case material:	Ceramic.
Terminals:	
Material -	Brass
Finish -	See table I.
Strength -	9 pounds.
Current rating, nominal:	See table I
Voltage rating:	See table I.
Current carrying capacity:	100 percent (at all temperatures between -55°C and +125°C).
Resistance:	Not applicable.
Overload interrupt:	See table I
Short circuit interrupt:	See table I.
Shock:	Method I for fuses rated 1/64A or less Method II for fuses rated more than 1/64A.
Thermal shock.	Method 107, test condition B, MIL-STD-202.
Characteristic:	See table I.
Marking:	Fuses shall be marked with the manufacturer's name or trademark, type designation, and current rating only.

Ⓗ TABLE I. Type designation identification.

Type designation				Terminal finish	Short circuit interrupt rating (amperes)			Overload interrupt time (seconds)	
					Circuit voltage 1/				
					28 Volts		125 Volts	200 percent nominal rating	300 percent nominal rating
Style	Characteristic	Maximum voltage	Current rating (amps)		ac	dc	ac		
FM01	A	125V	1/200A	Tin plate	3,000	3,000	60	.003- 0004	.0005-.0001
FM01		125V	1/100A					.005- 0008	.0005-.0001
FM01		125V	1/64A					001-.0005	0005-.0001
FM01		125V	1/32A					006- 001	.001-.0003
FM01		125V	1/16A					.050-.010	010-.003
FM01		125V	1/10A					040-.010	010-.004
FM01		125V	1/8A		1,500	1,500		050- 010	012-.004
FM01		125V	2/10A					055- 014	.012-.005
FM01		125V	1/4A					.040- 014	.012-.005
FM01		125V	3/10A					037- 013	.012-.005
FM01		125V	4/10A					.042- 015	014-.005
FM01		125V	1/2A					.035- 015	.015-.005
FM01		125V	6/10A					.090- 020	.018-.008
FM01		125V	3/4A					.090- 020	018- 008
FM01		125V	1A					.050- 018	018-.008
FM01		125V	1-1/2A					.050-.020	.020-.008
FM01		125V	2A					.060-.020	.020-.010
FM01		125V	3A					.110-.025	.023-.010
FM01		125V	4A					.300-.040	.033-.015
FM01	A	125V	5A					.300-.040	.033-.015

1/ Alternating current - 60 Hz.

Source: https://assist.dla.mil -- Downloaded: 202640-19T16:47Z
Check the source to verify that this is the current version before use.

Qualification inspection:

Inspection routine. Group II samples shall be as shown in table II below.

TABLE II Group II samples.

Examination or test	No. of sample fuses
Group II	16
Terminal strength	4
Overload interrupt	
200% at -55°C	4
200% at +85°C	4
300% at -55°C	4
300% at +85°C	4
Insulation resistance	16

The number of group III samples for qualification (or first article) and subgroup 1 for group C testing shall consist of the number of sample units shown in table III. Short circuit interrupt tests shall be conducted at the voltage indicated, and the fuses shall be capable of withstanding a minimum short circuit current as shown in table III. Insulation resistance test shall be specified in MIL-F-23419.

(H) TABLE III. Sampling for short circuit qualification and group C tests.

Current rating (amps)	Short circuit current (amps)			Number of sample units
	28 Volts		125 Volts	
	ac	dc	ac	
1/200	3,000	3,000	60	12
1/10	3,000	3,000	--	12
1/8	1,500	1,500	--	12
5	1,500	1,500	60	12

Supersession and cross-reference. The superseding items include the requirements of the superseded items. The existing stocks of superseded items may be used. When exhausted, the superseding items shall be used (see table IV).

TABLE IV. Cross-reference.

Superseding number	Superseded numbers			
	FSCM 1/ 81349	FSCM 81349	FSCM 71400	FSCM 71400
FM01A125V 1/200A	FM01-125V 1/200A	M23419/1-001	GMU 1/200A	GMW 1/200A
FM01A125V 1/100A	FM01-125V 1/100A	M23419/1-002	GMU 1/100A	GMW 1/100A
FM01A125V 1/64A	FM01-125V 1/64A	M23419/1-003	GMU 1/64A	GMW 1/64A
FM01A125V 1/32A	FM01-125V 1/32A	M23419/1-004	GMU 1/32A	GMW 1/32A
FM01A125V 1/16A	FM01-125V 1/16A	M23419/1-005	GMU 1/16A	GMW 1/16A
FM01A125V 1/10A	FM01-125V 1/10A	M23419/1-006	GMU 1/10A	GMW 1/10A
FM01A125V 1/8A	FM01-125V 1/8A	M23419/1-007	GMU 1/8A	GMW 1/8A
FM01A125V 2/10A	FM01-125V 2/10A	M23419/1-008	GMU 2/10A	GMW 2/10A
FM01A125V 1/4A	FM01-125V 1/4A	M23419/1-009	GMU 1/4A	GMW 1/4A
FM01A125V 3/10A	FM01-125V 3/10A	M23419/1-010	GMU 3/10A	GMW 3/10A
FM01A125V 4/10A	FM01-125V 4/10A	M23419/1-011	GMU 4/10A	GMW 4/10A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:47Z
Check the source to verify that this is the current version before use.

TABLE IV Cross-reference (continued)

Superseding number	Superseded numbers			
	FSCM 1/ 81349	FSCM 81349	FSCM 71400	FSCM 71400
FM01A125V 1/2A	FM01-125V 1/2A	M23419/1-012	GMU 1/2A	GMW 1/2A
FM01A125V 6/10A	FM01-125V 6/10A	M23419/1-013	GMU 6/10A	GMW 6/10A
FM01A125V 3/4A	FM01-125V 3/4A	M23419/1-014	GMU 3/4A	GMW 3/4A
FM01A125V 1A	FM01-125V 1A	M23419/1-015	GMU 1A	GMW 1A
FM01A125V 1-1/2A	FM01-125V 1-1/2A	M23419/1-016	GMU 1-1/2A	GMW 1-1/2A
FM01A125V 2A	FM01-125V 2A	M23419/1-017	GMU 2A	GMW 2A
FM01A125V 3A	FM01-125V 3A	M23419/1-018	GMU 3A	GMW 3A
FM01A125V 4A	FM01-125V 4A	M23419/1-019	GMU 4A	GMW 4A
FM01A125V 5A	FM01-125V 5A	M23419/1-020	GMU 5A	GMW 5A

1/ FSCM is the Federal Supply Code for Manufacturers in accordance with Federal Supply Handbooks H4-1 and H4-2

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, AS
Air Force - 11, 17, 99
DLA - ES
NS

User activities:
Army - ME, AR
Navy - MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
NAVY - EC

(Project No. 5920-0425)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:47Z
Check the source to verify that this is the current version before use.