
MILITARY SPECIFICATION SHEET

FUSES, INSTRUMENT TYPE,
STYLE FM04 (NONINDICATING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fuses described herein shall consist of this specification and the latest issue of MIL-F-23419.

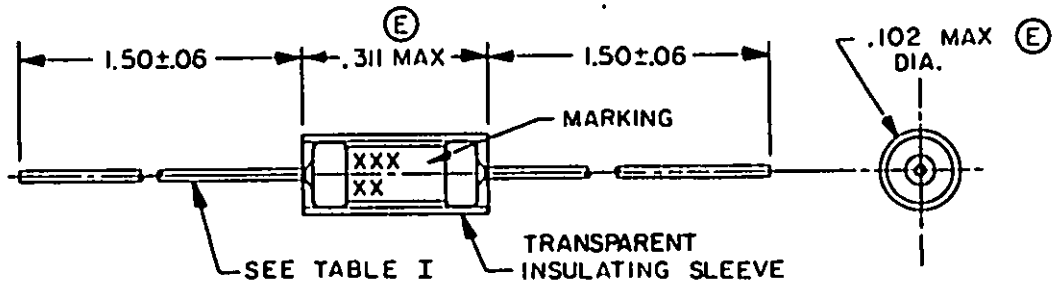

Inches	mm
.06	1.5
.102	2.59
.311	7.90
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style FM04 fuses.

Ⓔ denotes changes

Source: https://assist.dla.mil Downloaded: 2026-10-19T16:48Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable fuseholder: Grayhill Type 2-42, miniature test clip (or equivalent). 1/

Case material: Ceramic or glass.

Terminals:
Material: Caps, 90/10, commercial brass; leads, copper.
Finish: Caps, silver or bright alloy plate; leads solder coated.
Strength: 5 pounds along terminal axis.

Current rating, nominal: See table I.

Characteristic: See table I.

Voltage rating: See table I.

Current carrying capacity: 100 percent at +25°C; 110 percent at -55°C; 90 percent at +125°C. The temperature of the case, body, or terminals shall, at no point, rise more than 70°C above the ambient air temperature. 2/

Resistance: See table I. 3/

Overload interrupt: Percentage of nominal rating, interrupt time -55°C through +125°C, 200 percent in 0 to 5 seconds; 300 percent in 0 to 0.1 second. 4/

Short circuit interrupt: 300 amperes at maximum voltage dc, minimum insulation resistance 10,000 ohms.

Shock: Method I.

Thermal shock: Method 107, test condition B, MIL-STD-202.

Marking: Fuses shall be marked with the manufacturer's name or trademark and current rating only.

TABLE I. Type designation identification.

Style	Characteristic	Maximum voltage	Current rating (amperes)	Maximum cold resistance (ohms)	Lead diameter	
					Inches (+.002)	mm (+.05)
FM04	A	125V	1/16A	9.10	.025	.64
FM04	A	125V	1/8A	2.700	.025	.64
FM04	A	125V	1/4A	.960	.025	.64
FM04	A	125V	3/8A	.560	.025	.64
FM04	A	125V	1/2A	.365	.025	.64
FM04	A	125V	3/4A	.215	.025	.64
FM04	A	125V	1A	.155	.025	.64
FM04	A	125V	1-1/2A	.105	.025	.64
FM04	A	125V	2A	.072	.025	.64
FM04	A	125V	3A	.047	.025	.64
FM04	A	125V	4A	.029	.025	.64
FM04	A	125V	5A	.019	.025	.64
FM04	A	125V	7A	.013	.025	.64
FM04	A	125V	10A	.008	.025	.64
FM04	A	32V	15A	.0053	.032	.82

1/ For 7, 10, and 15 ampere fuses use Grayhill Push-post number 29YY2126-0 or equivalent.
2/ For 10 and 15 ampere fuses the maximum temperature rise shall be 85°C.
3/ Cold resistance is measured at 10 percent or less of rated current.
4/ Interrupt time for 15 ampere fuse shall be 10 seconds maximum at 200 percent of rated current and .3 second maximum at 300 percent of rated current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:48Z
Check the source to verify that this is the current version before use.

Qualification inspection:

Inspection routine. Group II samples shall be as shown in table below:

TABLE II. Group II samples.

Inspection	Number of sample fuses
Group II	16
Terminal strength	4
Overload interrupt	
200% at -55°C	4
200% at +85°C	4
300% at -55°C	4
300% at +85°C	4
Insulation resistance	16

The number of group III samples for qualification (or first article) testing shall consist of four samples fuses of each of the current ratings as shown in table III. Short circuit interrupt tests shall be conducted at the direct current voltage indicated, and the fuses shall be capable of withstanding a minimum short circuit current as shown in table III. Insulation resistance test shall be as specified in MIL-F-23419.

TABLE III. Short circuit tests.

Fuse type	Current rating	Short circuit current	DC type voltage
FM04	10A	300A	125
FM04	15A	300A	32

Supersession and cross-reference: The superseding items include the requirements of the superseded items. The existing stocks of superseded items may be used. When exhausted, the superseding items shall be used (see table IV).

TABLE IV. Cross-reference.

Superseding number	Superseded numbers FSCM 1/ 81349	FSCM 1/ 81349	FSCM 1/ 81349
FM04A125V1/16A			
FM04A125V1/8A	FM04-125V-1/8A	FM04-1/8A	FM04125V1/8A
FM04A125V1/4A	FM04-125V-1/4A	FM04-1/4A	FM04125V1/4A
FM04A125V3/8A	FM04-125V-3/8A	FM04-3/8A	FM04125V3/8A
FM04A125V1/2A	FM04-125V-1/2A	FM04-1/2A	FM04125V1/2A
FM04A125V3/4A	FM04-125V-3/4A	FM04-3/4A	FM04125V3/4A
FM04A125V1A	FM04-125V-1A	FM04-1A	FM04125V1A
FM04A125V1-1/2A	FM04-125V-1-1/2A	FM04-1-1/2A	FM04125V1-1/2A2A
FM04A125V2A	FM04-125V-2A	FM04-2A	FM04125V2A
FM04A125V3A	FM04-125V-3A	FM04-3A	FM04125V3A
FM04A125V4A	FM04-125V-4A	FM04-4A	FM04125V4A
FM04A125V5A	FM04-125V-5A	FM04-5A	FM04125V5A
FM04A125V7A			
FM04A125V10A			
FM04A125V15A			

1/ FSCM is the Federal Supply Code for Manufacturers in accordance with Federal Supply Handbooks H4-1 and H4-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:48Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, ER, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES
NS

User activities:
Army AL, ME
Navy - MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5920-0422-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:48Z
Check the source to verify that this is the current version before use.