

MILITARY SPECIFICATION SHEET

RESOLVER, ELECTRICAL: TYPE 23R8N4A

The complete requirements for procuring the resolver described herein shall consist of this document and the issue in effect of Specification MIL-R-23417.

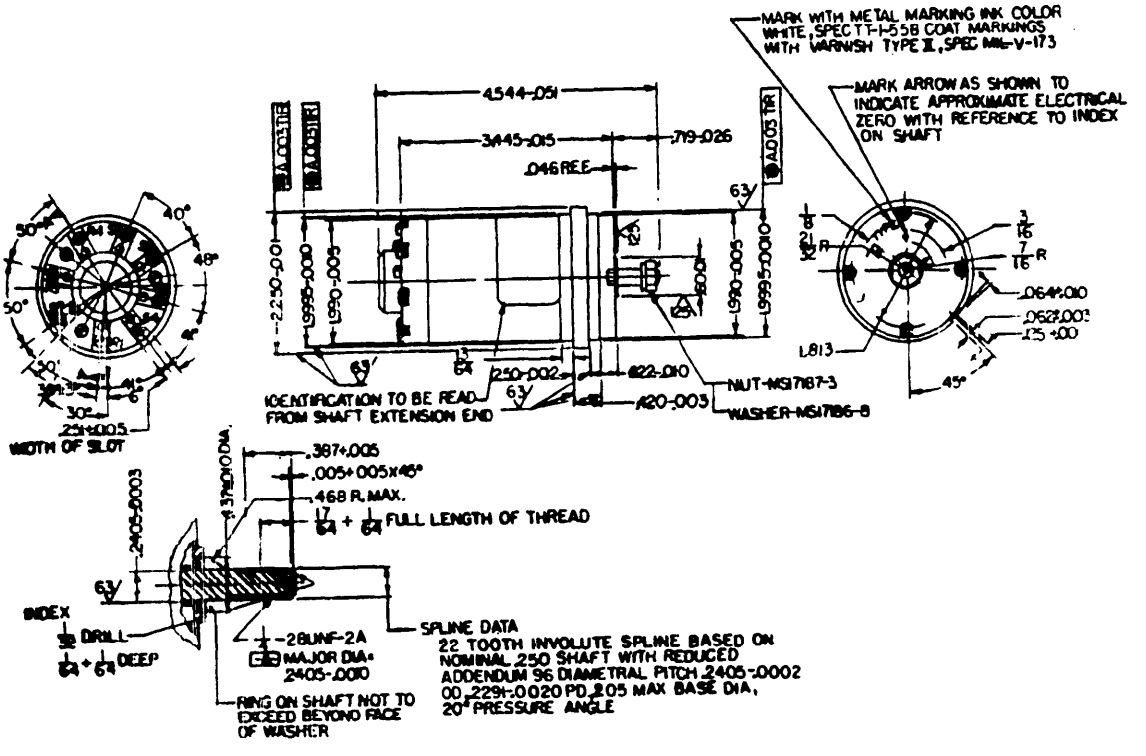

PARTIAL SECTION
SHOWING SPLINE SHAFT EXTENSION

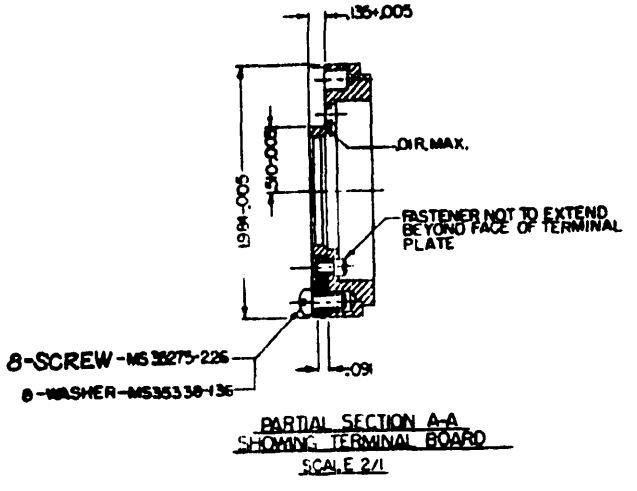

PARTIAL SECTION A-A
SHOWING TERMINAL BOARD
SCALE 2/1

NOTE: THIS SPECIFICATION IS TO BE USED TO SUPPORT IN-SERVICE MATERIEL ONLY AND NOT TO BE USED FOR NEW DESIGN.

NOTES:
1-ECCENTRICITY OF SHAFT DIAMETER (SMOOTH PORTION) SHALL NOT EXCEED .001 TIR WHEN SHAFT IS ROTATED IN BEARINGS.
2-DIMENSIONS ARE IN INCHES; TOLERANCES WHEN NOT SPECIFIED ARE ±.005 ON DECIMALS, 1/64 ON FRACTIONS AND ±1° ON ANGLES.
3-THE DESIGN OF THIS UNIT SHALL PROVIDE FOR THE TERMINAL BLOCK TO REMAIN FIXED WHEN TERMINAL SCREWS AND TERMINAL LUGS ARE REMOVED.

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:42Z
Check the source to verify that this is the current version before use.

TABLE I

RESOLVER, ELECTRICAL: TYPE 23R8N4A

PERFORMANCE REQUIREMENTS AND CHARACTERISTICS

	Requirements	Value	Unit	Tolerance
1.	Excitation winding	Rotor		
2.	Rated frequency	400	Hz	±1%
3.	Input voltage		volts (rms)	±1%
	Maximum	90		
	Test	60		
	Minimum	10		
4.	Primary current	83	milliamps	nominal
5.	Primary power	0.86	watts	nominal
6.	D. C. resistance		ohms	±15%
	Rotor	56.5		
	Stator	46		
7.	Impedance		ohms	R±15%+jx±10%
	Z_{RO}	125+j795		
	Z_{SO}	119+j942		
	Z_{SS}	112+j100		nominal
8.	Transformation ratio			
	Output/input	1.00		±1%
9.	T. R. variation		%	
	Due to voltage	0.05		maximum
10.	Equality of transformation ratios		% spread	
	Output/input	0.5		
11.	Phase shift		degrees	
	Output/input	4.0		±0.5
12.	Phase shift variation		degrees	
	Due to voltage	±0.2		
13.	Interaxis error	± 5	minutes	
14.	Functional error	±0.2	%	
15.	Null voltage		mV(rms) output	maximum
	Fundamental	31.8		
	Total	63.6		
16.	Shift of resolver zero		minutes	
	With voltage	±3.0		
	With frequency	±1.0		
17.	Harmonic distortion	0.1	%	maximum
18.	Temperature rise	20	°C	maximum
19.	Friction torque	0.2	oz. - in.	maximum
	@ -55°C	0.4		maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:42Z
Check the source to verify that this is the current version before use.

TABLE I (Continued)

Requirements	Value	Unit	Tolerance
20. Radial play	0.0010 (for reversal of 1/2 lb load)	inches	maximum
21. End play	0.0050 (for reversal of 1 lb load)	inches	maximum

Custodian:
Army - MU

Review activities:
Army - EL, AV

User activities:
Army - ME

Preparing activity:
Army - MU

(Project 5990-A015)

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:42Z
Check the source to verify that this is the current version before use.

Quadrature voltage | 3.11 | 4.7.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:42Z
Check the source to verify that this is the current version before use.