MIL-P-46565C (MU)
8 MAY 1973
SUPERSEDING
MIL-P-46565B (MU)
7 October 1968

MILITARY SPECIFICATION

PRIMERS, PERCUSSION, M28A2 and M28B2 LOADING, ASSEMBLING AND PACKING

1. SCOPE

1.1 This specification covers the loading assembling and packing for percussion primers M28A2 and M28B2.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-223	-	Powder, Black
MIL-A-2550	-	Ammunition and Special Weapons, General Specification for
MIL-P-20449	-	Primer, Percussion, M61, Loading, Assembling and Packing
MIL-C-45662	-	Calibration System Requirements

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105)
MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-1168	-	Lot Numbering of Ammunition
MIL-STD-1235	-	Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

FSC: 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY

8838129	-	Primer, Percussion M28A2 Assembly
8838130	-	Primer, Percussion M28B2 Assembly
8858935	-	Box, Packing, Ammunition, for Primers M28A2, M28B2, or M60A1
8858940	-	Box, Set-up, Packing, Ammunition for Primers

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Material and parts shall be in accordance with applicable drawings and specifications.

3.2 Primer Assembly. The primer assembly shall comply with all requirements specified on drawing (dwg.) 8838129 and 8838130 as applicable and with all requirements specified in applicable specifications.

3.3 Moisture content of black powder. The moisture content of black powder at the loading station at the time of loading shall not exceed 0.5 percent, when determined as specified in 4.3.3.

3.4 Head Assembly

3.4.1 Non-functioning. The head assembly shall not function by an applied energy of 47.52 inch-ounces minimum (min) when tested as specified in 4.3.1.1.

3.4.2 Functioning. The head assembly shall function by applied energy of 159.20 inch-ounces maximum (max) when tested as specified in 4.3.1.2.

3.5 Primer assembly

3.5.1 Functioning. The primer assembly shall function without audible hangfire, when tested as specified in 4.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

3.5.2 Pressure resistance. The primer assembly shall withstand a pressure of 40,000 plus or minus 4,000 pounds per square inch (psi) without evidence of rupture, or any part of the primer becoming detached, when tested as specified in 4.3.2.

3.6 Workmanship. All parts shall be dry and free of chips, burrs, dirt, grease, rust and other foreign material. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define terms used herein. The provisions of Specification MIL-A-2550 shall apply.

4.1.1 Submission of product. At the time the completed lot of product is submitted to the Government for acceptance, the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all of the quality assurance provisions specified within this specification.

b. Number of units of product inspected.

c. Results obtained, by defect code, for all inspections performed.

d. Drawing, specification number and date, together with an identification and date of changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

e. Certificates of conformance on all material purchased by the contractor when such material is controlled by Government or commercial specifications referenced in any of the contractual documents.

f. Number of items in the lot.

g. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 Inspection provisions

4.2.1 Lot Formation. The term "lot" as used throughout this specification refers to an inspection lot, which is defined as essentially homogeneous collection of units of product from which a representative sample is drawn and inspected to determine conformance of the lot with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the lot has been produced by one manufacturer in one unchanged process, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. Changes to the process,specification, or drawings, not affecting safety, performance interchangeability, or storage as determined by the Government, shall not be deemed to alter the homogeneity of the lot. Inspection lots shall comply with MIL-STD-105. Unless otherwise specified by the contracting officer, the inspection lot size of end items deliverable under the contract shall not be less than the smallest weekly estimate of quantities contractually scheduled for production during the contract period nor more than the largest monthly quantity contractually scheduled for delivery during the contract period. Inspection lots of components or subassemblies,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

other than the items of delivery, shall be homogeneous and of a size mutually convenient to both the contractor and the Government inspector. Lot numbering, as required shall be in accordance with MIL-STD-1168. Each lot shall contain:

a. Metal parts of one lot interfix number from one manufacturer.

b. Black powder from not more than one lot from one manufacturer.

c. Primer, percussion M61 (herein after referred to as primer elements) of one lot interfix number from one manufacturer.

4.2.2 Examination. Inspection for Critical Defects (and Major Defects, when so specified), shall be 100 percent. Sampling plans and procedures for Major and Minor defects shall be in accordance with MIL-STD-105 except that continuous sampling plans in accordance with MIL-STD-1235 may be used if approved by the procuring activity. Also, at the option of the procuring activity, AQL's and sampling plans may be applied to individual characteristics listed using and AQL of 0.65 percent for each Minor Defect and an AQL of 0.40 percent for each Major defect, except where 100% inspection is specified. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.2.4.

4.2.2.1 Head, prior to assembling battery cup and firing plug (see dwg. 8838129 and 8838130)

Categories	Defects	Method of Inspection
Critical:	None Defined.	
Major:	AQL 0.25 percent	
101.	Percussion element missing, cocked or inverted	Visual
Minor:	AQL 1.0 percent	
201.	Seal between percussion element and head missing or incomplete	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

202. Evidence of poor workmanship (see 3.6).....Visual

4.2.2.2 Head, prior to assembling to body (see dwg. 8838129 and 8838130)

Categories	Defects	Method of Inspection
Critical:		
1.	Firing plug or battery cup above flush with surface of head	Straight-Edge
Major:	AQL 0.65 percent	
101.	Firing plug missing or inverted	Visual
102.	Flash hole in head completely obstructed	Visual
103.	Battery cup loose or missing	Manual
Minor:	None defined.	

4.2.2.3 Body, prior to assembly of liner and head assembly (see dwg. 8838129 and 8838130)

Categories	Defects	Method of Inspection
Critical:		
1.	Any flash hole missing from body	Gage CD
Major:	None defined.	
Minor:	AQL 0.65 percent	
201.	Evidence of poor workmanship (see 3.6)	Visual

4.2.2.4 Body, prior to assembling head assembly (see dwg. 8838129 and 8838130)

Categories	Defects	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

Major: AQL 0.40 percent
101. Weight of charge.....Balance CD
102. Liner fails to cover all holes...Visual

Minor: AQL 0.65 percent
201. Foreign matter in charge.....Visual

4.2.2.5 Assembly (see dwg. 8838129 and 8838130)

Categories	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
101.	Head assembly loose on body	Manual
*102.	Any flash hole not completely sealed	Visual
Minor:	AQL 2.50 percent	
201.	Total length, max	Gage CD
202.	Diameter at flange, max	Gage CD
203.	Diameter at front end, max	Gage CD
204.	Crimp of body to head missing or incomplete	Visual
205.	Marking missing, misleading or unidentifiable	Visual
206.	Evidence of poor workmanship (see 3.6)	Visual

*Sketches 1, 2 and 3 on Figure 1 indicate acceptable primers. Furthermore, a primer with holes displaying the conditions shown in sketches 4, 5 or 6 may be classed acceptable provided that the visible liner is thoroughly impregnated with paint or lacquer and not more than 20 percent of the holes have this condition.

4.2.2.6 Set-up box, prior to sealing (see dwg. 8858940).

Categories	Defects	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

Major: None defined.

Minor: AQL 1.50 percent

201. Any packing material missing.....Visual
202. Primer missing.....Visual
203. Separator damaged to the extent that primers touch each other....Visual

4.2.2.7 Sealed set-up box (see dwg. 8858940)

Categories	Defects	Method of Inspection

Critical: None defined.

Major: None defined.

Minor: AQL 1.50 percent

201. Sealing strip torn, incomplete, badly wrinkled or otherwise fails to seal carton.....Visual
202. Carton torn, cut or punctured....Visual
203. Marking missing, misleading or unidentifiable.....Visual
204. Contents loose.....Manual

4.2.2.8 Sealed barrier bag (see dwg. 8858940)

Categories	Defects	Method of Inspection

Critical: None defined.

Major: AQL 0.40 percent

101. Bag punctured, torn or cut.....Visual
102. Seal mislocated or incomplete....Visual

Minor: None defined.

4.2.2.9 Packing box, prior to sealing (see dwg. 8858935)

Categories	Defects	Method of Inspection

Critical: None defined

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

Major: AQL 0.40 percent
101. Carton missing.....Visual

Minor: None defined.

4.2.2.10 Packing box, sealed (see dwg. 8858935)

Cateogires	Defects	Method of Inspection
Critical:	None defined.	
Major:	AQL 0.65 percent	
101.	Box broken, board loose or protruding nail	Visual
102.	Strapping missing, broken or loose	Visual
103.	Cover improperly assembled	Visual
Minor:	AQL 1.50 percent	
201.	Marking missing, misleading or unidentifiable	Visual
202.	Strapping improperly engaged or mislocated	Visual
203.	Contents loose	Visual

4.2.3 Testing

4.2.3.1 Head assembly

4.2.3.1.1 Non-functioning (see 3.4.1) Critical defect, CD

4.2.3.1.1.1 Beginning with the first lot produced, and continuing until three consecutive lots have complied with the acceptance criteria specified, a sample of 150 head assemblies shall be randomly selected from each lot for the test. If any sample fails to comply with the requirement, the lot shall be rejected. The test shall be performed as specified in 4.3.1.1.

4.2.3.1.1.2 After three consecutive lots have met the criteria of 4.2.3.1.1.1, a sample of 50 head assemblies shall be randomly selected from each lot for this test. If

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

one or more primers fails to comply with the applicable requirement, the lot shall be rejected. The test shall be performed as specified in 4.3.1.1. Primers subjected to this test shall be destroyed.

4.2.3.1.2 Functioning (see 3.4.2) Major defect - CD

4.2.3.1.2.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the applicable requirements specified, two hundred and fifty samples shall be randomly selected from each lot for this test. If three or more primers fail to comply with the applicable requirements, the lot shall be rejected. If one or two defects are found, a second sample of five hundred primers shall be tested. If the combined number of defective in both the first and second sample is three or more, the lot shall be rejected. The test shall be performed as specified in accordance with 4.3.1.2.

4.2.3.1.2.2 After three consecutive lots have met the criteria of 4.2.3.1.2.1, a sample of 125 primers shall be randomly selected from each lot for this test. If two or more primers fail to comply with the applicable requirements, the lot shall be rejected. If only one defect is found, a second sample of 250 primers shall be tested. If the combined number of defectives in both the first and second sample is two or more, the lot shall be rejected. The test shall be performed as specified in 4.3.1.2.

4.2.3.2 Primer assembly functioning and pressure resistance (see 3.5) Major defect - A sample of 25 primers shall be randomly selected from each lot for this test. If any primer fails to comply with the applicable requirement, the lot shall be rejected. The test shall be performed as specified in 4.3.2.

4.2.3.3 Check test for deterioration of Primer, Percussion (M61 Assembly). If the total elapsed time between original acceptance of the M61 primer lot and the assembly of that lot into the M28A2 or M28B2 primer exceeds two years, or if the M61 primers have been subjected to adverse conditions for any period of time since previous test, the M61 primer lot shall be subjected to and must satisfactory pass the check test for deterioration specified in MIL-P-20449 immediately before the M61 primer lot is assembled into the M28B2 primers (see 6.3 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

4.2.3.4 Moisture content of black powder (see 3.3) Major defect, CD - A sample of one primer body, prior to assembly to the head, shall be randomly selected from each eight hours production. The black powder shall be tested as specified in 4.3.3 and any failure to comply with the applicable requirement shall be cause for rejection of the eight hours production represented by the sample.

4.2.3.5 Torque of Body to head (see dwg. 8838129 or 8838130) CD.

A sample from each crimping head shall be selected for each 2 hours of production or after any adjustment to head. If any sample fails the head producing them, shall be removed from production. Further, that portion of production since the last qualification inspection shall be rejected.

4.2.4 The inspection equipment required to perform the examinations and tests prescribed in this section is identified under the "Method of Inspection" headings in 4.2.2 and 4.2.3 (see 6.2).

4.2.4.1 Inspection Equipment Capability and Accuracy. All inspection equipment and facilities shall be of adequate quality and quantity to perform properly and accurately all the required inspections, measurements and tests. The inspection equipment shall be maintained in satisfactory condition for the continued proper performance of these functions and shall be calibrated in accordance with the provisions of MIL-C-45662.

4.2.4.2 Government Rights to Documentation. Inspection equipment drawings and lists provided and revised in accordance with the requirements may be used by DOD activities for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, maintenance of equipment, construction, survey and whenever inspection equipment drawings are needed.

4.3 Test Methods and Procedures

4.3.1 Head assembly

4.3.1.1 Non-functioning. The loaded heads, prior to assembling to the body, shall be assembled into the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

fixture. A steel ball weighing a min. of 7.92 ounces shall be dropped from a height to give the required impact force (approximately 6 inches).

4.3.1.2 Functioning. The test shall be performed as specified in 4.3.1.1 except that the weight of the ball shall be 7.96 ounces maximum, and the height shall be adjusted to give the required impact force (approximately 20 inches).

4.3.2 Primer assembly functioning and pressure resistance. The sample primers shall be sent to a Government Proving Ground for testing. The primers shall be assembled into complete rounds for which they are standard and fired at the required pressure.

4.3.3 Determination of moisture content of black powder. The moisture content of the black powder shall be determined in accordance with the procedure specified in Specification MIL-P-223.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging

5.1.1 Level C. The primer assemblies shall be preserved and packaged in accordance with dwg. 8858940.

5.2 Packing

5.2.1 Level C. The cartons shall be packed in accordance with dwg. 8858935.

5.3 Marking. Marking shall be in accordance with dwg. 8858940 and 8858935.

6. NOTES

6.1 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Primer required.
c. Data Cards. Data cards shall be prepared for each lot in accordance with the information specified in Standard MIL-STD-1167.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

6.2 Inspection Equipment Designs. Inspection equipment designs are of two types - Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs, if available, are designated by drawing numbers under the "Method of Inspection" headings in Section 4. Design responsibility for all other inspection equipment is assigned to the contractor. Equipment to be designed by the contractor is designated "CD". The contractor need not furnish any design when a complete Government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.2.2 and 6.2.3 should he elect to do so.

6.2.1 SIE designs. - SIE designs may consist of any of the following:

a. Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.

b. A source control drawing or a specification control drawing as defined in MIL-STD-100.

c. An envelope drawing, as defined in MIL-STD-100, which established the criteria which a detail design shall meet. When envelope drawings are specified the contractor shall prepare designs which comply with the criteria therein.

6.2.2 Contractor designs. Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate operating instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and evaluation by the Government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial, or with SIE designs if not otherwise covered thereby (see 6.2.1c). Designs shall be of the category and form (per MIL-D-1000) specified in the Contract Data Requirements Lists (DD Form 1423).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

The contractor is referred to MIL-HDBK-204, "Inspection Equipment Design" for guidance. The specification number, paragraph number and defect number if such number has been assigned shall be referenced on each contractor design together with the component or assembly drawing number and revision letter to which the specific design applies.

6.2.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements List (DD Form 1423) or in the contract. Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will normally be accomplished within one month after receipt.

6.3 Check test for possible deterioration of percussion artillery primers. The following tests are designed to prevent the loading of deteriorated artillery primers into a major ammunition item. The test shall be performed on artillery primers from each lot which has been stored under normal conditions for more than two years or under adverse conditions for any period of time. If the specification for the ammunition item into which the artillery primers are loaded does not require that a check test be performed, the contracting officer should insert a provision for the performance of the check tests in the contract.

6.3.1 Head Assembly

6.3.1.1 Non-functioning (see 3.4.1). The sampling plan for the test shall be in accordance with Table I. Any head assembly which fails to comply with the applicable requirement shall be classed defective. The test shall be performed as specified in 4.3.1.1, except that the flash tube and the head assembly shall be separated in a manner that will not damage the head assembly to the extent that the validity of the test results would be questionable. All head assemblies so tested shall be scrapped.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

TABLE I

Sample	Sample Size	Size	Combined Sampled Acceptance Number	Rejection Number
First	20	20	*	2
Second	20	40	*	2
Third	20	60	0	2
Fourth	20	80	1	3
Fifth	20	100	1	3
Sixth	20	120	1	3
Seventh	20	140	2	3

* No acceptance on this sample.

6.3.1.2 Functioning (see 3.4.2). The sampling plan for the test shall be in accordance with Table II. Any head assembly which fails to comply with the applicable requirement shall be classed defective. The test shall be performed as specified in 4.3.1.2, except that the flash tube and the head assembly shall be separated in a manner that will not damage the head assembly to the extent that the validity of the test results would be questionable.

TABLE II

Sample	Sample Size	Size	Combined Samples Acceptance Number	Rejection Number
First	75	75	*	2
Second	75	150	0	3
Third	75	225	0	3
Fourth	75	300	1	4
Fifth	75	375	2	5
Sixth	75	450	2	5
Seventh	75	525	4	5

* No acceptance on this sample.

6.3.2 Moisture content of black powder. A sample of 25 primers shall be selected for this test. The black powder shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

be removed from the flash tube by any suitable means. The moisture content of the powder shall be determined in accordance with the method specified in Specification MIL-P-223. If the moisture content of any of the powder tested exceeds 0.7 percent, the lot of primers shall be rejected.

Since black powder is hygroscopic, it is advisable to place the powder in a dry, air-tight container immediately upon removal, and to run the determination as soon as possible thereafter.

6.4 Cost of check tests. The contracting officer will arrange for the contractor to be reimbursed for the expense incurred in the performance of the check test. The test shall be conducted at Government expense without cost to the contractor who loaded the M61 primer or the contractor loading and assembling the M28A2 or M28B2 primer, and shall not constitute a basis for rejection against either contractor, except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., while the primers were under the jurisdiction of either contractor.

Custodian:
Army - MU

Preparing Activity:
Army - MU

Project Number: 1390 - A - 019

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

ARTILLERY PRIMERS
STANDARDS FOR PAINT CONDITIONS IN FLASH HOLES

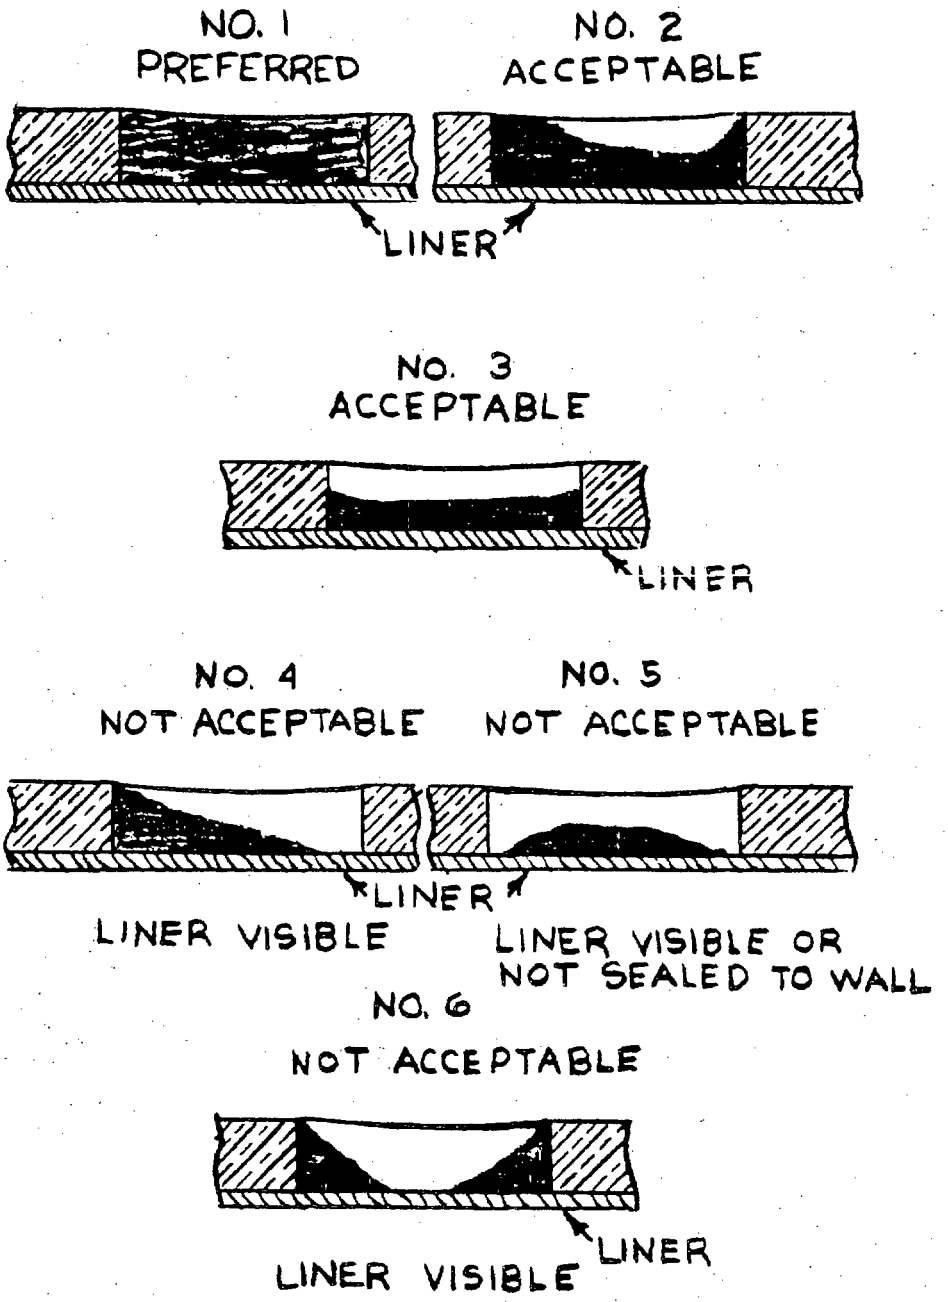


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Picatinny Arsenal
Dover, New Jersey 07801

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

OFFICIAL BUSINESS

Commander
Picatinny Arsenal
ATTN: SMUPA-QA-A
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:19Z
Check the source to verify that this is the current version before use.