MIL-C-707D

27 January 1971

SUPERSEDING
MIL-C-707C
5 April 1967

MILITARY SPECIFICATION

CASE, SLEEPING BAG, M-1945, WATER REPELLENT

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for a water repellent case for a sleeping bag.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-L-61	-	Laces, Nylon.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use).
PPP-B-636	-	Box, Fiberboard.

MILITARY

MIL-C-484	-	Cloth, Wind Resistant Oxford, Cotton, Quarpel Treated.
MIL-T-3530	-	Thread and Twine; Mildew Resistant or Water Repellent Treated.
MIL-F-10884	-	Fasteners, Snap.
MIL-T-43548	-	Thread, Polyester, Cotton-Covered.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

DRAWINGS

ARMY NATICK LABORATORIES

5-4-1065 - Case, Sleeping Bag, M-1945, Water Repellent; Assembly and Sections.
5-4-1066 - Case, Sleeping Bag, M-1945, Water Repellent; Details.
5-4-2305 - Case, Sleeping Bag, M-1945, Water Repellent; Panels.

(Figures 1, 2, and 3 are miniature reproductions of referenced drawings and are attached for information only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 First article.- When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.4).

3.3 Materials.-

* 3.3.1 Cloth, wind resistant oxford, cotton.- The cloth for all components of the case shall be dyed Olive Green 107 to match the standard sample (see 6.3) and shall conform to type I of MIL-C-484.

* 3.3.2 Eyelet and washer.- The eyelet and washer shall be aluminum conforming to commercial standard size AA. The eyelet shall be telescopic type. The thickness of the eyelet and washer shall be .0150 and .0130 respectively, ± .0015.

* 3.3.2.1 Finish.- The eyelet and washer shall be electrolytically anodized and then given two coats of semi-gloss black japanned finish (see 4.3.1.1). The paint coatings shall level out to a uniform thickness without wrinkles, sags, drops, or areas of no film. The finish shall be sufficiently adherent to withstand the setting operation without flaking or loss of finish.

3.3.3 Lace, nylon.- The lace shall conform to type I, class 1 of V-L-61. The length shall be 240 inches with a permissible plus tolerance of 5 inches. The lace shall be dyed Olive Drab 7.

* 3.3.4 Fasteners, snap.- The snap fasteners shall conform to style 2, finish 2 of MIL-F-10884. The female component shall be the socket with a 24 line size, size 1 button and the male component shall be the stud with size 1 eyelet.

* 3.3.5 Thread, polyester, cotton-covered.- The thread shall conform to MIL-T-43548. Thread sizes shall be as follows:

For all type 301 stitching and bartacks -	Size 50, 2 ply
For all type 401 stitching -	Size 50, 2 ply for needle
	Size 70, 2 ply for looper

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

* 3.3.5.1 Color and treatment.- The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530. The finished thread shall show fastness to laundering equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed thread shall show "good" fastness to laundering.

3.4 Construction.- The construction shall conform in all respects to the drawings listed in section 2 and as specified herein.

3.4.1 Stitching, machine.- All stitching, except bartacking, shall conform to FED-STD-751 as follows:

For all stitching except bartacking and stitching indicated by "Z" on drawing.	- Type 301, 8 to 12 stitches per inch.
For stitching indicated by "Z" on drawing.	- Type 301 or 401, 8 to 12 stitches per inch.

* 3.4.1.1 Type 301 stitching.- Unless otherwise specified, ends of all type 301 stitching shall be backstitched or overstitched one inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

* 3.4.1.1.1 Repairs of type 301 stitching.- Thread breaks and two or more consecutive skipped stitches or run-offs on type 301 stitching shall be overstitched not less than one inch in each direction beyond the defective stitching area. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

* 3.4.1.2 Type 401 stitching.- Thread breaks and two or more consecutive skipped stitches or runoffs on type 401 stitching shall be overstitched not less than one inch in each direction beyond the defective stitching area. Thread tension shall be maintained so that there will be no loose stitching. The chain portion of the stitching shall be on the inside of the case.

* 3.4.1.3 Automatic stitching.- Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

* 3.4.1.4 Bartacking.- Bartacks shall be 1/2 $\pm$ 1/8 inch long, 1/8 $\pm$ 1/32 inch wide and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

* 3.4.1.5 Thread ends.- All thread ends shall be trimmed to a length of not less than 1/4 inch.

* 3.4.2 Location marks.- Location marks for assembling components shall not be drilled unless the component part completely and permanently covers the drilled hole.

3.4.3 Piecing.- In order to utilize remnant ends and fall-off; flaps, facings, and front panels may be pieced once with the joining seam at right angles to the warp direction. The joining seam shall be as shown in section D-D on Drawing 5-4-1065. The back panel shall not be pieced.

3.4.4 Flap.- The flap may be fabricated of 1 or 2 pieces in accordance with methods shown on Drawing 5-4-1066.

* 3.4.5 Setting of snap fasteners.- If holes are prepunched to receive the snap fasteners, the holes shall be smaller than the outside diameter of the fastener barrel so that the barrel must be forced through the hole. The fasteners shall be securely clinched without cutting the surrounding material.

* 3.4.6 Setting of eyelets with washers.- If holes are prepunched to receive the eyelets, the holes shall be smaller than the outside diameter of the eyelet barrel so that the barrel must be forced through the hole. The eyelets with washers shall be securely clinched without cutting the surrounding fabric or splitting of the eyelet. The washers shall be on the inside of the case.

3.4.7 Lace.- The lace shall be folded to form a skein 12 to 24 inches long and tied through eyelet at foot end of front opening.

* 3.5 Markings and labels.- Markings and labels shall conform to DDD-L-20 in the types and classes specified below.

* 3.5.1 Marking.- The letters "US" shall conform to type IV, class 9, and shall be in the size and location shown on Drawing 5-4-1065. The fastness requirements for the class 9 marking shall be as specified for the class 5 label.

* 3.5.2 Instruction and identification label.- Each case shall have a combined instruction and identification label conforming to type I, classes 3 and 5 with the complete label coated as specified for class 3 labels. The combined label shall be printed with the instruction information first and the identification information placed below the instruction information. A space of 1/2 inch minimum shall be maintained between the instruction and identification information. In addition a solid line of 1/32 inch minimum width shall extend across the label approximately in the center of the 1/2 inch blank space. The width of the label

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

shall be as shown on Drawing 5-4-1066 with the length governed by the label contents. The fastness of printing of the combined label shall be as specified for class 5 labels. Format and contents of the instruction label shall be as shown on Drawing 5-4-1066. The combined label shall be attached in the location shown on Drawing 5-4-1065.

3.6 Workmanship.- The sleeping bag case shall conform to the quality and grade of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2. First article.- When required (see 6.2), the preproduction sample submitted in accordance with 3.2 shall be inspected as specified in 4.3.3 for compliance with design, construction, workmanship, assembly and dimensional requirements.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Inspection of components and materials.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.1.1 Certification.- The supplier shall furnish a certificate of compliance for the requirements stated in 3.3.2 and 3.3.2.1.

* 4.3.2 In-process inspection.- The cut parts covered by Drawing 5-4-2305 shall be inspected during the cutting process to determine if parts are cut properly with respect to size. In addition, inspection shall be made during the manufacturing process to insure that when holes are pre-punched for snap fasteners and eyelets, the holes are smaller than the snap fastener or eyelet barrel. Whenever non-conformance is noted, corrections shall be made to the parts affected and lot in process. Parts which can not be corrected shall be removed from production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

* 4.3.3 Inspection of the end item.- The classification of defects found during examination shall be in accordance with the lists shown in 4.3.3.1 and 4.3.3.2. The sample unit shall be one finished sleeping bag case. The lot size shall be expressed in units of sleeping bag cases. The inspection level and acceptable quality level shall be as specified in 4.3.3.3.

* 4.3.3.1 Visual examination.-

Examine	Defect	Classification Major	Minor
General defects:			
Cloth	Any hole (except drill hole), cut, tear or smash.	X	
	Any exposed drill hole exceeding 1/16 inch diameter.		X
	Abrasion mark, open place, broken or missing yarn or multiple floats.	X	
	Any mend, darn or patch.	X	
	Needle chews.	X	
Lace	Cut, chafed or abraided.	X	
	Ends of lace not tipped.	X	
	Lace not formed into a skein or not secured through eyelet at foot end of front opening.		X
Hardware:			
General	Broken or malformed, corroded areas, burrs, or sharp edges.	X	
	Finish omitted or not as specified.		X
	Any required component improperly installed causing failure to serve intended purpose.	X	
Snap fastener	Any fastener not functioning properly, i.e. fails to snap closed, provide a secure closure or to open freely.	X	
	NOTE: The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.		
	Clinched excessively tight, cutting surrounding material.	X	
	Clinched loosely, permitting either component to rotate freely.	X	
	Incorrect style.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Hardware: (cont'd)			
Eyelet	Clinched excessively tight, cutting surrounding material.	X	
	Insecurely clinched to a degree that eyelet may be detached from material.	X	
	Eyelet barrel split.		X
Seams and stitching:			
Open seams	Up to and including 1/2 inch.		X
	More than 1/2 inch.	X	
NOTE:	A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more consecutive skipped stitches or runoffs occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.		
Raw edges:			
On outside of case	More than 1/2 inch, when securely caught in stitching.		X
On inside of case, (only where turn-in is required)	More than 1 inch, when securely caught in stitching.		X
NOTE:	Raw edges not securely caught in stitching shall be classified as open seams.		
Seam and stitch type	Wrong seam or stitch type.	X	
	Seam pleated or badly puckered.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Seams and stitching: (cont'd)			
Stitch tension	Loose tension, resulting in a loose top or bobbin thread.		X
	Tight tension, resulting in puckering of material.		X
Stitches per inch	One to two stitches less than minimum specified. 1/		X
	Three or more stitches less than minimum specified. 1/	X	
	One or more stitches in excess of maximum specified. 1/		X
	NOTE: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places, or in turning corners, shall be classified as follows: (a) Within the minor defect classification - no defect. (b) Within the major defect classification - minor defect.		
Thread breaks, skipped stitches or runoffs	Overstitched less than one inch in each direction beyond defective stitching area. 2/		X
Stitching ends (on type 301 stitching)	Ends of stitching not secured as specified (except when caught in other stitching or turned under in a hem).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching: (cont'd)			
Rows of stitching	Any row missing.	X	
Stitching indicated by "Z" on drawing	Chain portion of stitching on outside of case.		X
Bartacks	Any bartack omitted.	X	
	Stitching loose, incomplete or broken.		X
	Number of stitches not as specified.		X
Components and assembly	Any component omitted or not as specified, or required operation omitted (unless otherwise classified herein).	X	
	Flap, facings, or side panels fabricated out of more than two pieces.		X
	Back panel fabricated out of more than one piece.	X	
Flap	Top end of flap not correctly located on side panel causing inability to secure first snap fastener without puckering case as evidenced by mis-alignment of shoulder seams:		
	(1) By more than 1/4 inch but not more than 1/2 inch.		X
	(2) By more than 1/2 inch.	X	
Snap fastener	Any male or female component (except first snap at top of case) misplaced causing inability to secure snap fastener without puckering case between any two snap fasteners:		
	(1) By more than 1/4 inch but not more than 1/2 inch.		X
	(2) By more than 1/2 inch.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Instruction and identification labels, and marking	Omitted, incorrect, illegible, misplaced or size of characters not as specified.		X
Cleanness	Grease or oil stain clearly noticeable.		X
	Thread ends not trimmed throughout.		X

1/ Defect to be scored when condition exists on any one seam for a length of three inches or more or when the combined length of several areas exceeds five inches.

2/ On all types of stitching, thread breaks or two or more consecutive skipped stitches or runoffs not overstitched shall be classified as open seams.

* 4.3.3.2 Dimensional examination.-

Examine	Defect
Component and location dimensions	Not within specified tolerance.
Stitch margin or gage	Not within specified tolerance.

* 4.3.3.3 Inspection level and acceptable quality level (AQL).- The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

	Inspection level	AQL	
For defects in 4.3.3.1	II	2.5	Major
		10.0	Total major and minor defects
For defects in 4.3.3.2	S-3	6.5	One class

* 4.3.4 Examination of preparation for delivery requirements.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

* 4.3.4.1 Examination for packaging, packing and marking.- An examination shall be made to determine that packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulged or distorted container.
Content	Number of cases per bundle is more or less than required. 1/ Number of bundles per container is more or less than required.

1/ One bundle from each container in the sample shall be examined.

* 4.3.4.2 Examination for palletization.- An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each case shall be neatly folded to measure approximately 14-1/2 inches long by 9-1/2 inches wide. Five folded cases shall be evenly stacked in a bundle and securely tied with cotton tape or twine approximately four inches from each end.

5.1.2 Level C.- The cases shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Twenty cases, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat two in length, one in width, and two in depth within a shipping container. Inside dimensions of each container shall approximate 19-1/2 inches in length, 15 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Twenty cases, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF, (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat, two in length, one in width, and two in depth within a shipping container. Inside dimensions of each container shall approximate 19-1/2 inches in length, 15 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with Method II as specified in the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

* 5.2.3 Level C.- Cases, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), cases packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 5.4 Marking.- In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129. Each interior package shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

6.1 Intended use.- The case is intended for use as a protective cover for the Sleeping Bag, Arctic, Outer Shell, M-1949 and Sleeping Bag, Mountain, M-1949.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Stock number.
(c) First article - when first article sample is required (see 3.2, 4.2, and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

6.3 For access to samples, address the procuring office issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

* 6.4 First article.- When a first article sample is required, it shall be inspected and approved under appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample. The first article should consist of one completed sleeping bag case. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test and approval of the first article.

* 6.5 Marginal code identification.- The outside margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - MC
Air Force - 82

Review activities:


Army - MD
Navy - MS

Preparing activity:


Army - GL

Project No. 8465-0411


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

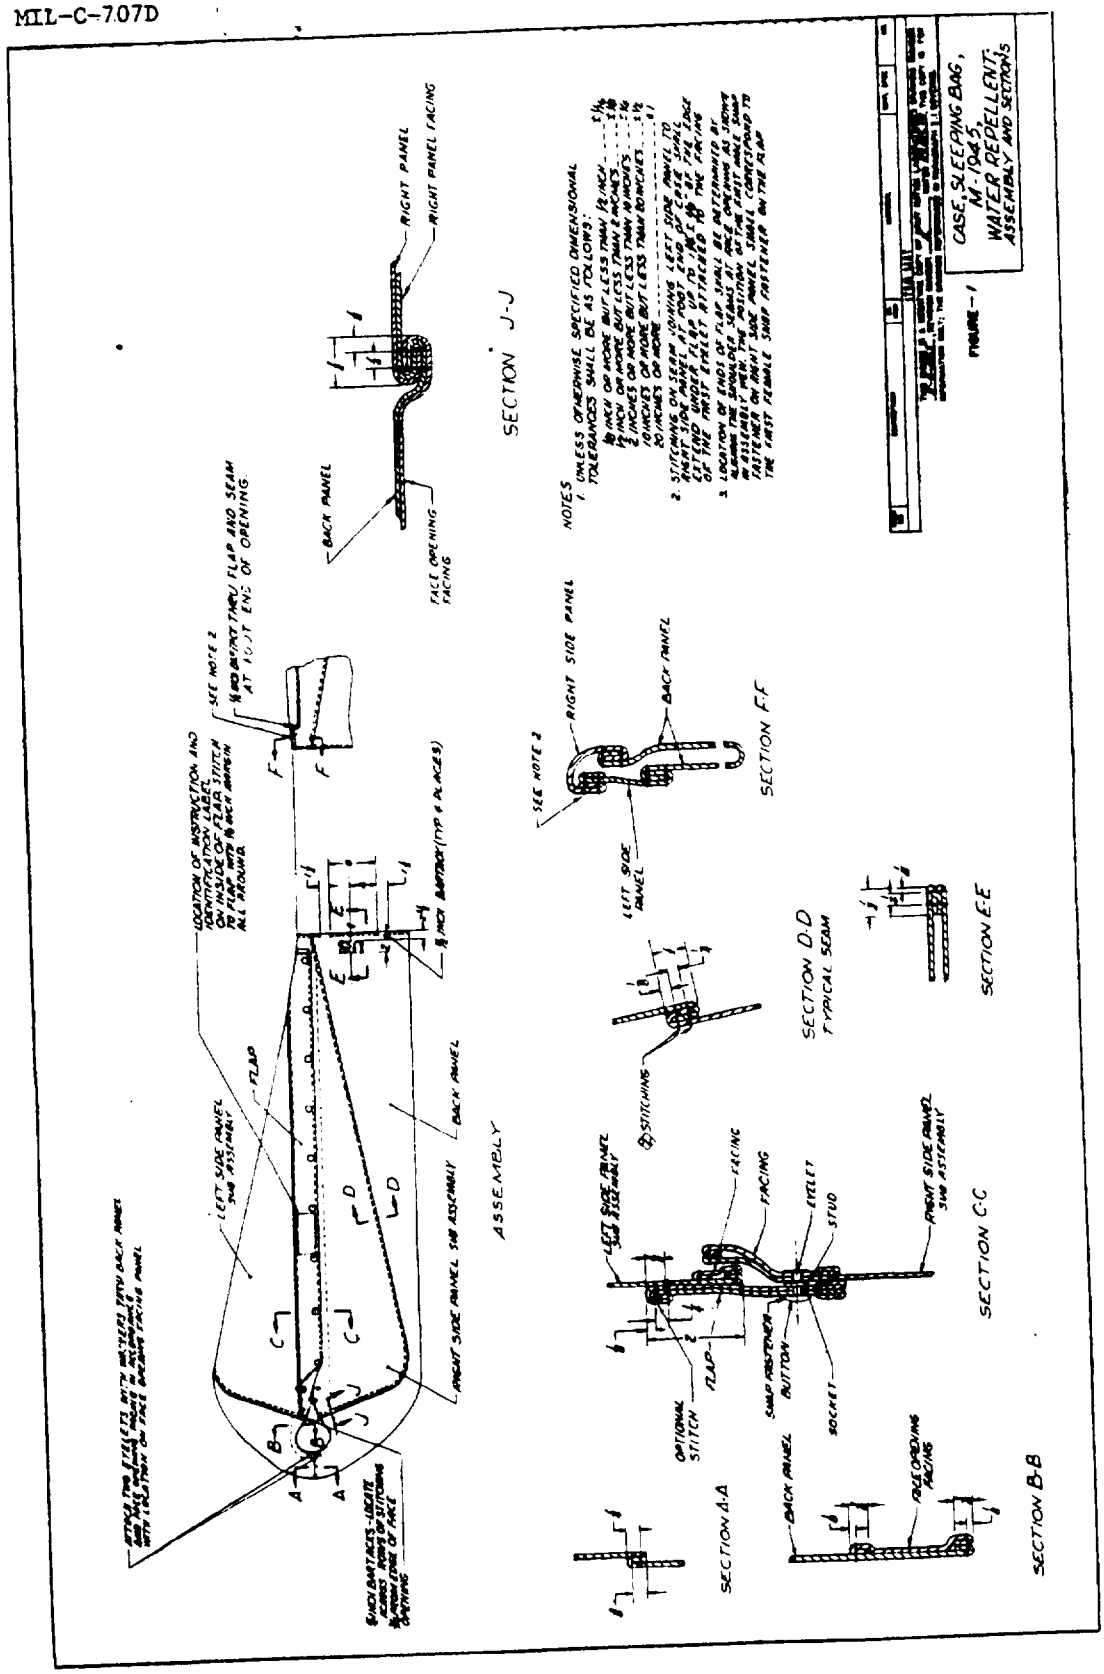

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

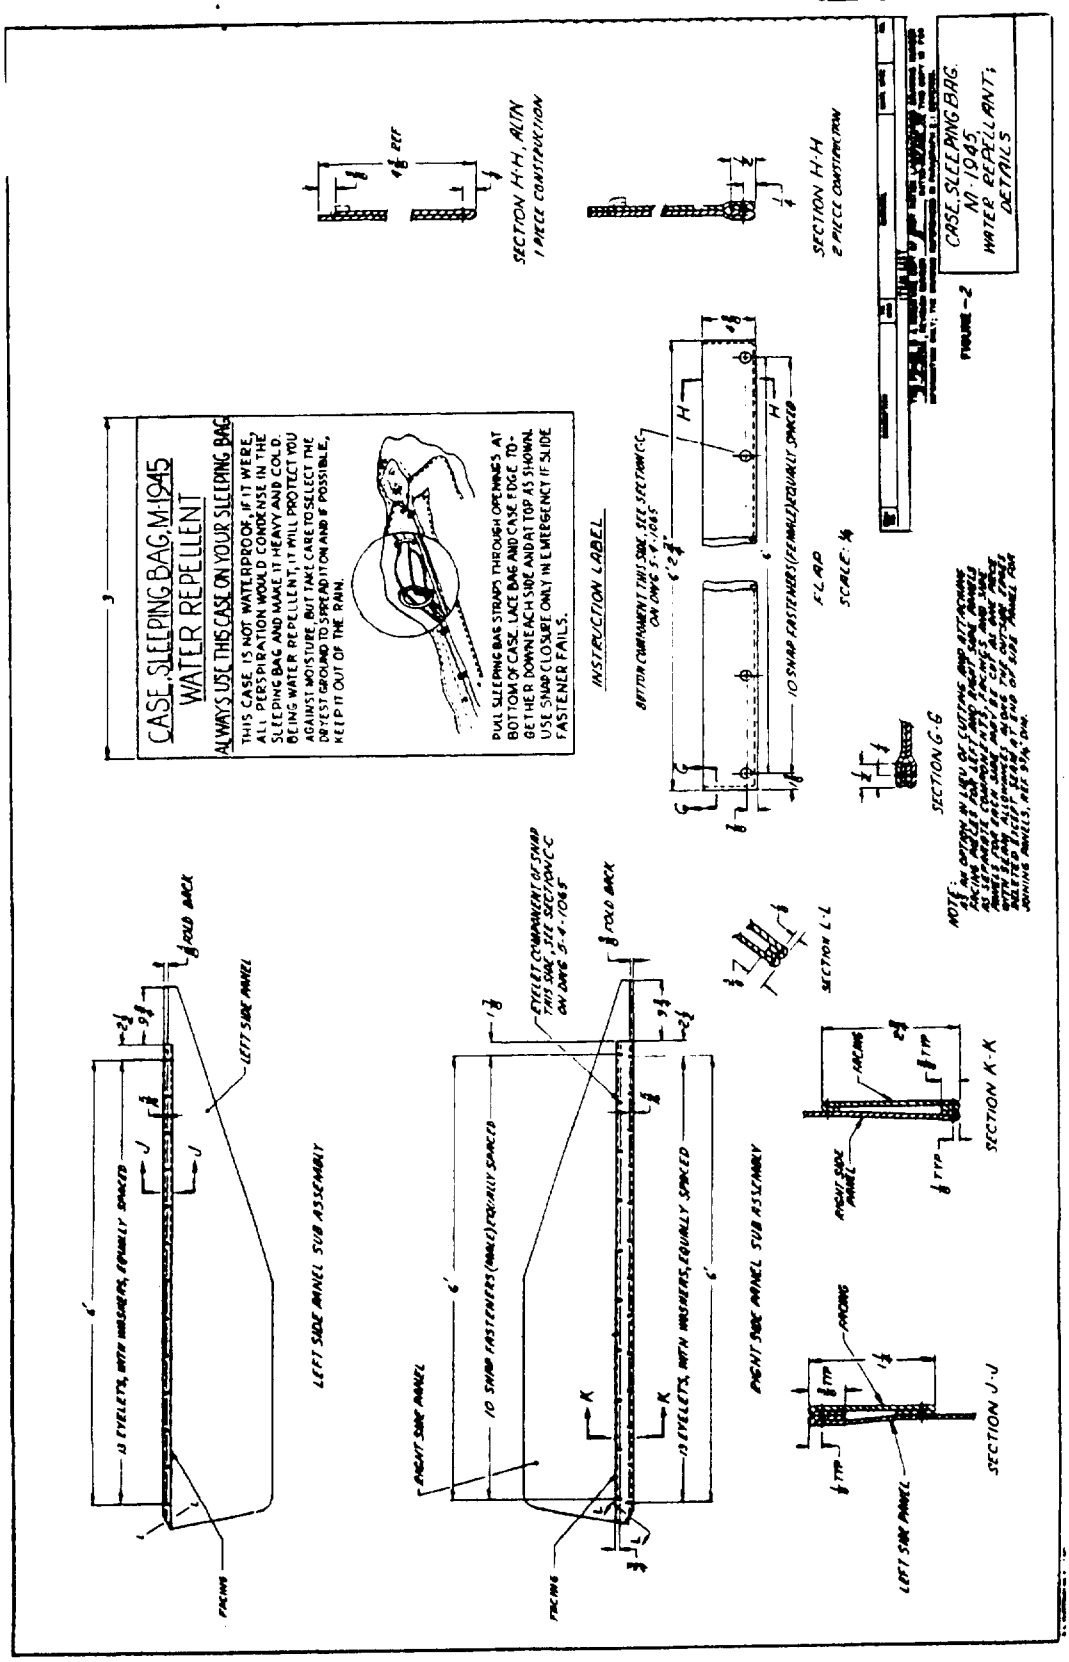

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

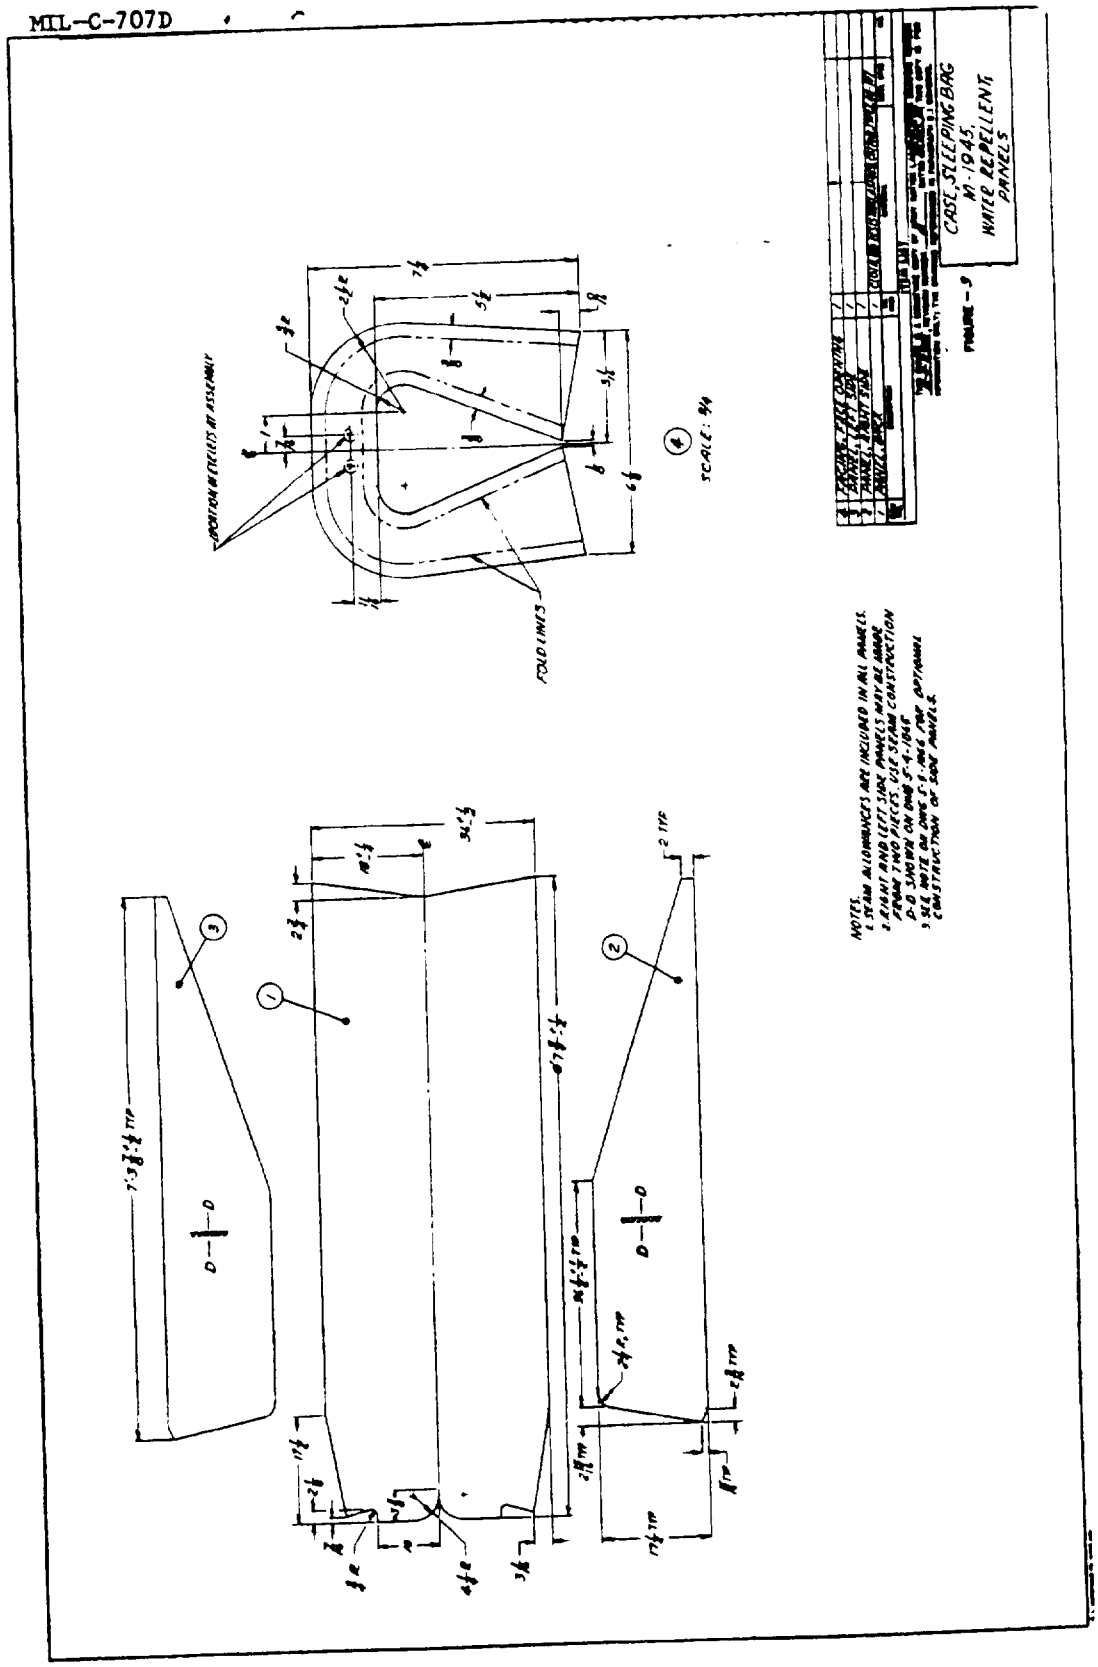

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Case, Sleeping Bag, M-1945, Water Repellent MIL-C-707D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:19Z
Check the source to verify that this is the current version before use.