MIL-C-729D

16 January 1969
SUPERSEDING
MIL-C-729C
9 February 1965

MILITARY SPECIFICATION

CARRIER, WIRE CUTTER

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a wire cutter carrier, in one type and size, made of olive drab cotton duck.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered.
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths.
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-636	-	Box, Fiberboard.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-H-639 - Hooks, (For Belts, Straps, and Equipage Items).
MIL-L-10547 - Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.
MIL-F-10884 - Fasteners, Snap.
MIL-T-43566 - Tape, Textile, Cotton, General Purpose, Natural or in Colors.

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

DRAWING

U.S. ARMY NATICK LABORATORIES

2-2-38 - Carrier, Wire Cutter.

(Figure 1 is a miniature reproduction of referenced drawing and is attached for information only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a sample of the finished item shall be submitted or made ready for the contracting officer or his authorized representative for inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.-

* 3.2.1 Duck, cotton.- The cotton duck shall, before finishing, be hard textured Number 8, conforming to type I of CCC-C-419.

* 3.2.1.1 Color and treatment.- The cotton duck shall be dyed Olive Drab No. 7 and water repellent and mildew resistant treated in accordance with type I, class B, of CCC-D-950.

* 3.2.2 Webbing, textile, cotton.- The webbing shall be Olive Drab No. 7 and conform to type IIa, class 4, 2-inch width of MIL-W-530.

* 3.2.3 Tape, textile, cotton.- The tape shall be Olive Drab No. 7 and conform to type I, class 4, 3/4 inch width of MIL-T-43566.

* 3.2.4 Thread, polyester.- The thread for all stitching shall be type I, class I, sub-class A, size FF, conforming to V-T-285.

* 3.2.4.1 Color.- The thread shall be dyed Olive Drab Shade S-1 (C.A. 66022), and shall show fastness to chlorine bleaching equal to or better than the standard sample (see 6.3). If no standard sample is available, the thread shall show good fastness to chlorine bleaching.

* 3.2.5 Fastener, snap.- The snap fastener shall conform to style I, finish 2 of MIL-F-10884. The female component shall be regular pronged and the male component shall be stud eyelet base, size 1.

3.2.6 Hook, double.- The hook shall conform to type I, class 1 of MIL-H-639.

3.3 Construction.- The construction shall conform in all respects to Drawing 2-2-38 and as specified herein.

* 3.3.1 Stitching, machine.- All stitching shall conform to Fed. Std. No. 751, type 301 with 6 to 8 stitches per inch. Ends of all stitching, except W-W, shall be backstitched or overstitched 1 inch minimum, except where ends

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

are turned under in a hem or held down by other stitching. On W-W stitching, all ends shall be backstitched or overstitched 1/2 inch minimum. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

* 3.3.1.1 Repairs of type 301 stitching.- On all stitching, except W-W, thread breaks and two or more consecutive skipped stitches or run-offs shall be overstitched not less than 1 inch in each direction beyond the defective stitching area. On W-W stitching, thread breaks and two or more consecutive skipped stitches or run-offs shall be overstitched not less than 1/2 inch in each direction beyond the defective stitching area. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

* 3.3.1.2 Automatic stitching.- Automatic machines may be used to perform any of the required stitch patterns, provided the requirements for the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

* 3.3.1.3 Thread ends.- All thread ends shall be trimmed.

* 3.3.2 Setting of style I snap fastener.- The hole for the male part of the fastener shall be formed when the fastener is driven into the material. The hole punched before insertion of the female part of the fastener shall be no larger than that made by a standard No. 10 round drive punch (5/16-inch diameter hole). The fastener shall be securely clinched without cutting the surrounding material.

* 3.4 Marking.- The identification marking shall be applied in the location shown on the drawing and shall conform to type IV, class 5 of DDD-L-20. The letters "US" shall be applied in the location and in the size characters indicated on the drawing and shall conform to type IV, class 9 of DDD-L-20. Fastness of the class 9 marking shall be as specified for class 5 marking.

3.5 Workmanship.- The finished wire cutter carrier shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article.- When required, the preproduction sample submitted in accordance with 3.1 shall be inspected as specified in 4.3.3 for compliance with design, construction, workmanship and dimensional requirements.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 In-process inspection.- Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with specified requirements.

Requirement, operation or assembly	Specification reference
Edges of front and back pieces are stitched prior to binding operation	Section B-B, Drawing 2-2-38

4.3.3 Examination of the end item.- The classification of defects found during the examination shall be in accordance with the lists shown in 4.3.3.1 and 4.3.3.2. The sample unit for these examinations shall be one completely fabricated carrier. The inspection levels and acceptable quality levels for these examinations shall be in accordance with 4.3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

* 4.3.3.1 Visual examination.-

Examine	Defect	Classification Major	Minor A	Minor B
Cloth	Any hole, cut or tear.	X		
	Any abrasion marks, broken or missing yarns or multiple floats.	X		
	Any mend, darn or patch.	X		
	Needle chews.	X		
Webbing and tape	Any hole, cut or tear.	X		
	Frayed or scalloped edges, not firmly or tightly woven.	X		
	Needle chews:			
	- Up to 1/8 inch in length		X	
	- 1/8 inch or more in length.	X		
Hardware:				
General	Broken or malformed; corroded areas; burrs or sharp edges.	X		
	Finish omitted or not as specified.	X		
	Any required component improperly installed causing failure to serve intended purpose.	X		
Snap fastener	Fastener not functioning properly, i.e., fails to snap closed, provide a secure closure or to open freely.	X		
	Clinched excessively tight, cutting surrounding material.	X		
	Clinched loosely, permitting male components to rotate freely in the hole in the material or on female components, socket legs not tightly clinched leaving clinch plate loose.	X		
	Incorrect style.	X		
	NOTE: The fastener shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Double hook	Attached in reverse position.	X		
Seams and stitching:				
Open seams	Up to and including 1/2 inch.			X
	More than 1/2 inch, but not more than one inch.		X	
	More than 1 inch.	X		
	NOTE: A seam shall be classified as an open seam when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or runoffs occur.			
Raw edges (On edges required to be finished)	More than 1/2 inch when securely caught in stitching.		X	
	NOTE: Raw edges not securely caught in stitching shall be classified as open seams.			
Seam and stitch type	Wrong seam or stitch type.	X		
Stitch tension	Tension loose, resulting in loose bobbin or top thread.		X	
	Tension tight, resulting in puckering of material.		X	
Stitches per inch	One stitch less than minimum specified.			X
	Two or more stitches less than minimum specified.		X	
	One or more stitches in excess of maximum specified.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Stitches per inch (cont'd)	NOTE: Variation in the number of stitches per inch caused by operator speeding up the machine and pulling the material in order to sew over heavy places, or in turning corners, shall be classified as follows: (a) Within the minor B defect classification - No defect. (b) Within the minor A defect classification - Minor B defect.			
Thread breaks, skipped stitches or runoffs	On stitching other than W-W stitching, overstitched less than 1 inch in each direction beyond defective stitching area.			X
	On W-W stitching, overstitched less than 1/2 inch in each direction beyond the defective stitching area.			X
	NOTE: Thread breaks, skipped stitches or runoffs not overstitched shall be classified as open seams.			
Stitching ends	Ends of stitching not secured as specified (except when caught in other stitching or turned under in a hem).		X	
W-W stitching	One row of stitching missing.		X	
	Two or more rows of stitching missing.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Components and assembly	Any component or required operation omitted (unless otherwise classified herein).	X		
Back	Top edge of back folded on inside of carrier.		X	
Binding	Loosely applied or badly pleated.			X
	Ends folded over front of carrier.			X
Marking "US" and identification	Omitted, illegible, misplaced, incorrect, or size of characters not as specified.			X
Cleanness	Grease or oil stain clearly noticeable, thread ends not trimmed throughout.			X

* 4.3.3.2 Examination for dimensional characteristics.-

Examine	Defect	Classification Major	Minor
Overall finished dimensions	Smaller than nominal dimensions less applicable minus tolerance, but not smaller than nominal dimensions less twice the applicable minus tolerance.		X
	Smaller than nominal dimensions less twice the applicable minus tolerance.	X	
	Larger than nominal dimensions and applicable plus tolerance.		X
All dimensions other than overall	Not within specified tolerance.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

* 4.3.3.3 Inspection levels and acceptable quality levels.- The inspection levels and acceptable quality levels (AQL's), expressed in defects per hundred units, shall be as follows:

Examination	Inspection level	AQL's
4.3.3.1, visual characteristics	II	2.5 Major 6.5 Total major and minor A defects combined. 15.0 Total major, minor A and minor B defects combined.
4.3.3.2, dimensional	S-3	2.5 Major 10.0 Total major and minor defects combined.

* 4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it shall not be palletized and need not be sealed. Shipping containers fully prepared for delivery that have not been palletized shall be examined for defects of closure. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling.
Content	Number of bundles per container is more or less than required. Number of carriers per bundle is more or less than required. 1/

1/ For this defect, six bundles from each shipping container in the sample shall be examined.

* 4.3.5 Examination for palletization.- An examination shall be made to determine that the palletization requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

5.1.1 Level A.- Five carriers, with snap fasteners closed, shall be neatly stacked in a bundle, alternated top to bottom, and securely tied with cotton tape or twine. The carriers shall be stacked with the "US" facing down, except the top carrier shall be stacked with the "US" facing up.

* 5.1.2 Level C.- Carriers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A.- Three hundred carriers, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636; or overseas type, style A or J, type 2 load of PPP-B-601, as specified (see 6.2). The inside of each fiberboard container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Level A packages shall be packed flat with the "US" facing up and alternated top to bottom, six in length, two in width and five in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24 inches in length, 20-1/2 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each fiberboard container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636. Each wood container shall be waterproofed with a sealed case liner conforming to type I or II, grade C of MIL-L-10547, and closed and reinforced in accordance with the appendix of PPP-B-601.

* 5.2.2 Level B.- Three hundred carriers, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat with the "US" facing up and alternated top to bottom, six in length, two in width and five in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24 inches in length, 20-1/2 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

* 5.2.3 Level C.- Carriers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), carriers, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the pallet is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The wire cutter carrier covered by this specification is designed to serve as a suitable carrier for a barbed wire cutter. The carrier is provided with a double hook for attachment to individual equipment belt M-1936, and M-1956, cartridge belts, or any other belt or equipment provided with eyelets that will accommodate a double hook.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article.- Whether a preproduction sample is required (see 3.1).
(c) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(d) Type of shipping container desired for level A packing (see 5.2.1).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) Whether palletized loads are required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

* 6.3 For access to sample address the procuring office issuing the invitation for bids.

6.4 Wire cutter carrier weighs approximately 2 ounces.

* 6.5 Marginal code identification.- The outside margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:

Air Force - 84,85

User activities:


Army - ME
Navy - MC

Preparing activity:

Army - GL

Project No. 5140-0049

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

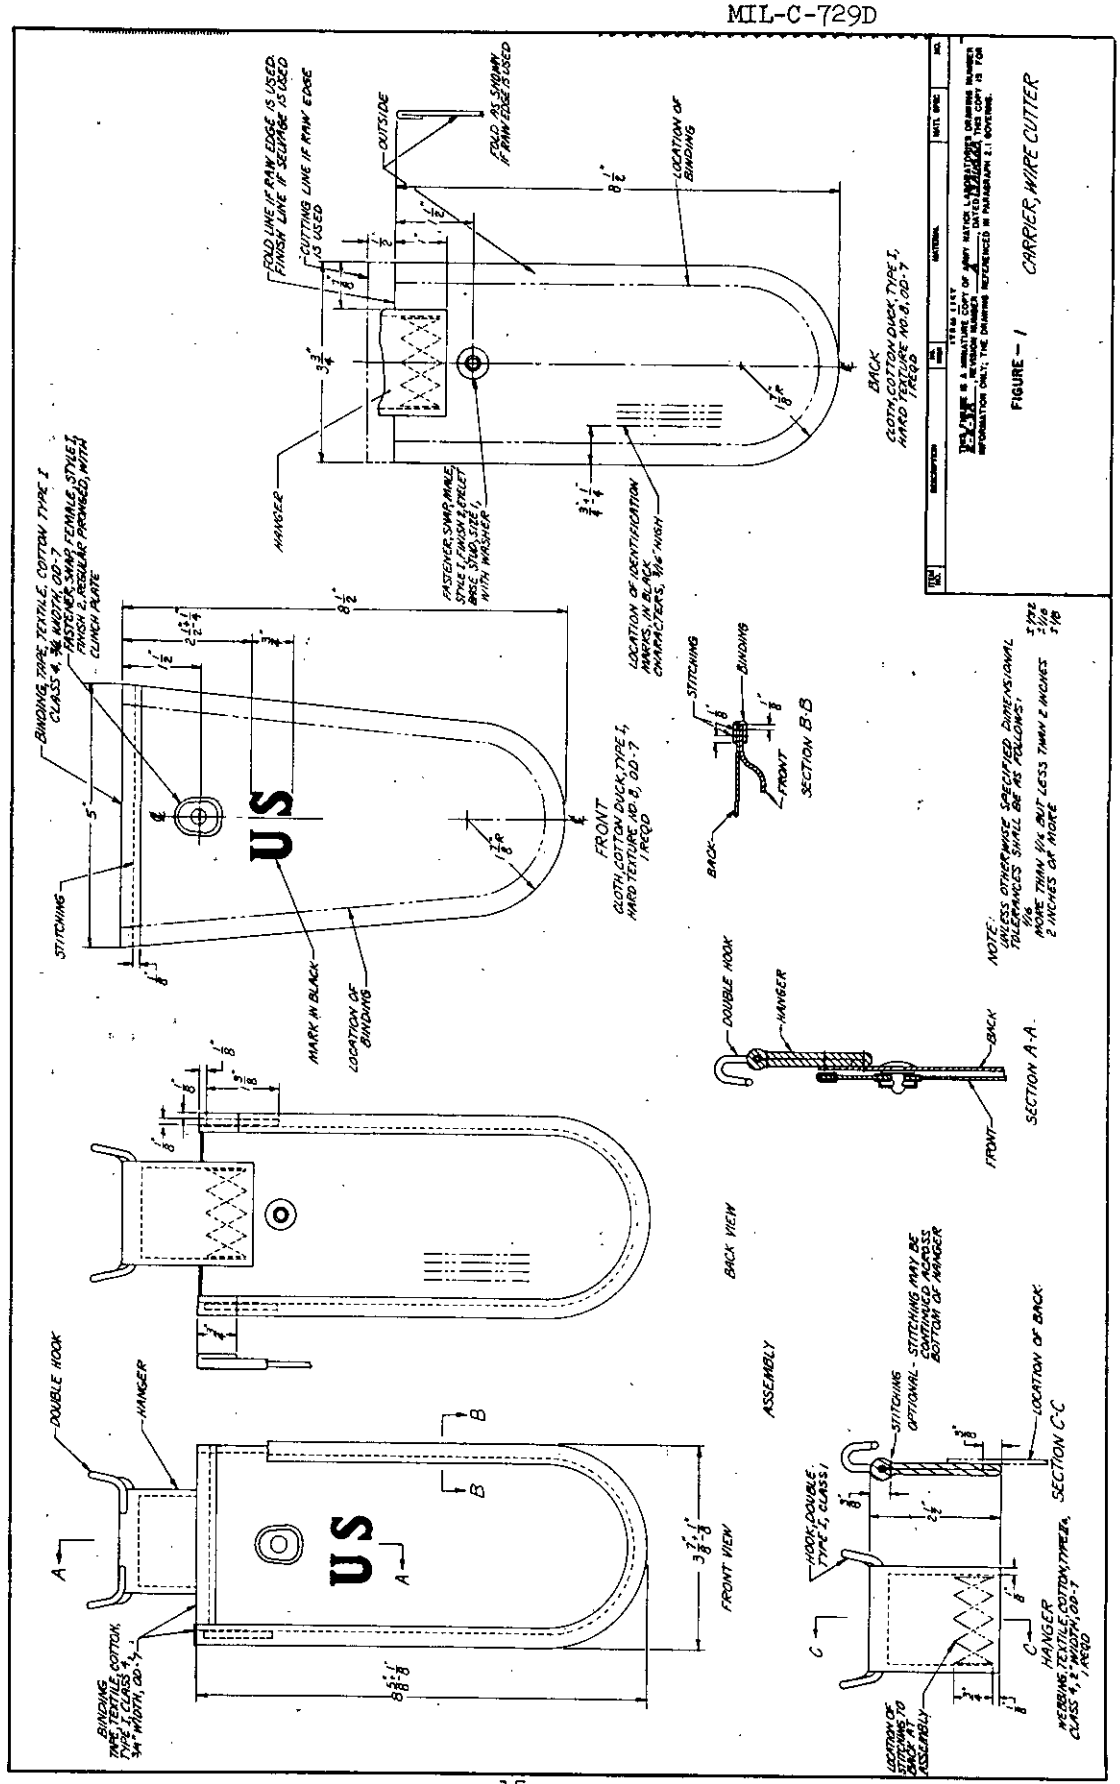

*U.S. GOVERNMENT PRINTING OFFICE: 1969-343-224/826

Source: https://assist.dla.mil -- Downloaded: 2020-10-16T17:21
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.

"to de this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Carrier, Wire Cutter MIL-C-729D

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:21Z
Check the source to verify that this is the current version before use.