INCH-POUND

MIL-L-714G
30 November 1988
SUPERSEDING
MIL-L-714F
27 June 1980

MILITARY SPECIFICATION

LEGGINGS, MEN'S

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of men's leggings, fabricated from cotton duck cloth.

1.2 Classification. The leggings shall be procured in the following sizes as specified (see 6.2):

1, 2, 3, 4, 5, 6, 7, 8, 9

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

	V-T-285	- Thread, Polyester
*	NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
	CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns Army and Numbered
	CCC-D-950	- Dyeing and Aftertreatment Processes for Cotton Cloths
	DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

	MIL-L-396	- Laces, Leggings
	MIL-F-495	- Finish, Chemical, Black, for Copper Alloys
	MIL-C-496	- Clips, End, Strap
	MIL-W-530	- Webbing, Textile, Cotton, General Purpose Natural or in Colors
*	MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
	MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
	MIL-T-43566	- Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

	FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

	MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
	MIL-STD-129	- Marking for Shipment and Storage
*	MIL-STD-147	- Palletized Unit Loads

(Copies of the Federal Information Processing Standard (FIPS) are available to Department of Defense activities from the Commanding Officer, Naval Publications and Forms Center, (ATIN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099. Others must request copies of FIPS from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the currentversion before use.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards) the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

* 3.3.1 Base cloth. The basic cloth for the leggings shall be cotton duck, conforming to type I, hard texture, No. 6 or No. 8, of CCC-C-419. Selvage stripes are not permitted. The cloth shall be bleached white, conforming to type V, class C, of CCC-D-950. The whiteness of the bleached duck shall approximate the whiteness of the component parts of 3.3.2, 3.3.3, and 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

3.3.2 Webbing. The webbing used for the footstrap on the leggings shall be cotton, 5/8 inch in width, conforming to type III, class 2, of MIL-W-530.

3.3.3 Tape. The tape used for binding the top and bottom edges of the leggings shall be cotton, 3/4 inch in width, conforming to type I, class 2, of MIL-T-43566.

3.3.4 Laces, leggings. The laces shall be cotton, conforming to MIL-L-396 and shall be 30 ± 1/2 inches long.

3.3.5 Thread. The thread used for seaming and stitching the leggings shall be polyester, conforming to type I or II, class 1, subclass A, sizes B and E, of V-T-285. The color shall approximate the whiteness of the base cloth (see 3.3.1) and component parts (see 3.3.2, 3.3.3 and 3.3.4).

3.3.6 Hardware.

3.3.6.1 Lacing eyelet and neck washer. The lacing eyelet and neck washer shall be made of brass and shall have a black finish in accordance with 3.3.6.7. The lacing eyelet shall conform to part No. A 1396 or equal and the neck washer shall conform to part No. A 1365 or equal (see 6.4 and 6.5).

3.3.6.2 Lacing hook and washer. The lacing hook and washer shall be made of brass and shall have a black finish in accordance with 3.3.6.7. The lacing hook shall conform to part No. 2024 or equal and the washer shall conform to part No. A 1128 or equal (see 6.4 and 6.5).

3.3.6.3 Buckle. The buckle shall be made of brass and shall have a black finish in accordance with 3.3.6.7. The buckle shall conform to part No. 03745 or equal (see 6.4 and 6.5).

3.3.6.4 Buckle clip. The buckle clip shall be made of brass and shall have a black finish in accordance with 3.3.6.7. The buckle clip shall conform to part No. D 3219 oR equal (see 6.4 and 6.5).

3.3.6.5 Buckle clip securing eyelet. The buckle clip securing eyelet shall be made of brass and shall have a black finish in accordance with 3.3.6.7. The component part shall conform to part No. A 1404 or equal (see 6.4 and 6.5).

3.3.6.6 End clip. The end clip used on the footstrap of the leggings shall conform to type I, class 1, size 5/8 inch, of MIL-C-496 and lacquer or clear epoxy resin coated.

* 3.3.6.7 Hardware finish. The finish shall be black chemical finish in accordance with MIL-F-495 and lacquer or clear epoxy resin coated. As an alternate, the finish may be black enamel finish with a minmum of two coats.

* 3.3.7 Label. Each legging shall be marked with a combination size, identification and instruction label conforming to type III or IV, class 14, of DDD-L-20, except that the height of characters indicating the size shall be a minimum of 3/4 inch solid or open print type. The label shall show colorfastness to laundering and crocking, and shall bear the following inscription:

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the current version before use.

LEGGINGS, MEN'S (100% COTTON)
CONTRACT NO. DLA 100-00-0-0000 (example)
STOCK NO. 8440-00-000-0000 (example)
SIZE: 4 (example)
NAME OF CONTRACTOR:
NAME OF MFG: (If other than contractor)

HANDWASH
1. Soak in warm water and soap or synthetic detergent - 5 minutes.
2. Wash leggings by rubbing together.
3. Rinse thoroughly with warm water.
4. Hang dry.

MACHINE WASH
1. Machine wash warm, delicate cycle using soap or synthetic detergent.
2. Hang dry.

3.4 Design. The leggings shall be of a three piece, fitted style construction (one left and one right), bound with tape along the top and bottom edges, fitted with a foot strap and buckle, and having and outside hook and eyelet lacing closure (see figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns provide 1/2 inch seam allowance for double-lapped and double-stitched seams. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns.

3.5.1 Pattern parts. The component parts for each pair of leggings (one right and one left), shall be cut from the basic material specified in 3.3.1 and in accordance with the following pattern parts required for the manufacturing process:

Pattern parts	Cut parts
Front	2
Side	2
Back	2

3.6 Construction.

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the leggings. Top stitching and edge stitching shall be 1/16 to 1/8 inch from the edge. The gage for double-lapped and double-stitched seams shall be 1/4 to 5/16 inch.

3.6.2 Thread breaks and end of seams. End of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch type) shall be repaired by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.7 Manufacturing operation requirements. The leggings shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished leggings are identical to that produced by following the sequence of operations as listed in Table I.

* 3.7.1 Size marking. The component parts of leggings shall be marked, ticketed or bundled to insure uniform size throughout the leggings. Any method may be used except:

(1) Metal fastening devices.
(2) Sew-on size tickets.
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:20Z
Check the source to verify that this is the current version before use.

3.7.3 Abbreviations in table of operations. The abbeviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF LEGGINGS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting a. Cut the leggings in strict accordance with the patterns furnished which show size, shape, directional lines, and notches for proper assembly of all cut parts.					
	b. All component parts shall be cut from one piece of material.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with nondefective and properly matched components.					
3.	Size marking * All parts shall be marked, bundled, or ticketed as indicated in 3.7.1.					
4.	Attach front and back pieces to side piece a. Join front and back pieces to side piece with a double-lapped, double-stitched seam, so that the front and back overlap the side piece.	301	LSc-2	6-8	E	E
	b. Bind the top and bottom edges with a strip of tape (see 3.3.3), with the stitching 1/16 to 3/32 inch from the bottom edge of binding.	301	BSa-1	6-8	E	E
5.	Front piece a. Overedge outer edge of front piece (not required if selvage is used).	503 or 504 or 602	EFd-1	6-8	E	E
	b. Turn edge of front piece to inside of leggings to form a 7/8 (±1/8) inch hem, and stitch 11/16 (±1/16) inch from the folded edge.	301	EFa-1	6-8	E	E
	c. Stitch across full width of hem on both top and bottom edge bindings, 1/8 to 3/16 inch from the folded edge.	301	SSa-1	6-8	E	E

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF LEGGINGS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
6.	Attach eyelets (front piece). Fasten seven eyelets (see 3.3.6.1) on hem of front piece, positioned as follows: 1. Top eyelet: 3/4 (±1/16) inch from legging top and 3/8 (±1/16) inch from folded edge. 2. Bottom eyelet: 5/8 (±1/16) inch from legging bottom and 3/8 (±1/16) inch from folded edge. 3. Remainder of eyelets: 3/8 (±1/16 inch from folded edge and equally spaced.					
NOTE:	Measurements shall be taken from the center of the eyelets.					
7.	Back piece.					
	a. Overedge outer edge of back piece (not required if selvage is used).	503 or 504 or 602	EFd-1	6-8	E	E
	b. Turn edge of back piece to inside of legging to form a 2 (±1/8) inch hem (hook stay), and stitch 1-7/8 (±1/16) inch from the folded edge.	301	EFa-1	6-8	E	E
	c. Stitch 1/8 to 3/16 inch from the folded edge.	301	OSf-1	6-8	E	E
	d. Stitch across full width of hem on both top and bottom edge bindings, 1/8 to 3/16 inch from the folded edge.	301	SSa-1	6-8	E	E
8.	Attach lacing hooks. Fasten six hooks (see 3.3.6.2) on back piece hem (hook stay), positioned as follows: 1. Position top hook 1-5/8 (±1/16) inches from the folded edge and equally spaced between the two upper vertical eyelets on the front piece (when top bound edges of the front and back pieces are aligned). 2. The remainder of the hooks similarly placed between adjacent eyelets.					
NOTE:	Measurements shall be taken from the center of the hooks.					

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF LEGGINGS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
9.	Attach eyelets (back piece). a. Fasten three eyelets (see 3.3.6.1) on back piece, positioned as follows: 1. One, 3/4 (±1/16) inch from top edge of legging and 2-1/8 (+1/4,-1/16) inches from folded edge of back piece. 2. One, 3/4 (±1/16) inch from top edge of legging and 7/8 (±1/16) inch from folded edge of back piece. 3. One, 3/4 (±1/16) inch from bottom edge of legging and 7/8 (±1/16) inch from folded edge of back piece.					
10.	Attach footstrap. a. Cut a piece of webbing (see 3.3.2) 10-1/2 (±1/4) inches in length, and fasten an end clip (see 3.3.6.6) to one end. b. Position the webbing on side piece at inside of legging, with the raw edge of webbing 1 (±1/8) inches from the bottom edge of binding and 3 (±1/8) inches from the center of webbing to center of front joining seam. c. Stitch two 5/8 to 3/4 inch bartacks across the webbing. One bartack shall be centered on the bottom binding and the other on the body fabric 1/2 (±1/16) inch above the first.	Bartack		42-45 per bartack	B	B
11.	Attach buckle. a. Fasten a buckle to bottom of front piece with a clip and eyelet (see 3.3.6.3 through 3.3.6.5), positioned as follows: The center of the eyelet shall be 1-1/4 (±1/16) inches from the folded edge of front piece and 3/8 (±1/16) inch from the bottom bound edge of binding.					
12.	Marking. Mark each legging on the inside of side piece, 3 (±1/2) inches below the top edge and centered (see 3.3.7).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:20Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF LEGGINGS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
13.	Pairing. a. Match and pair the leggings (one left and one right).					
	b. Secure each pair by threading a pair of laces thru the buckles and knotting loosely.					
14.	Cleaning. a. Trim all thread ends.					
	b. Remove all loose threads.					
	c. Remove all spots and stains.					

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The sizes and measurements of the finished leggings shall conform to the dimensions specified in Table II. All measurements and tolerances are expressed in inches, and shall be made with the leggings tightly laced and laid flat.

Table II - Finished measurements

Size	Overall length (A)	Width of calf (B)	Width of ankle(C)
1	12	6-1/4	4-3/8
2	12	6-5/8	4-5/8
3	12	7	4-7/8
4	12	7-3/8	5-1/8
5	12	7-3/4	5-1/4
6	12	8-1/8	5-3/8
7	12	8-1/2	5-1/2
8	12	8-7/8	5-3/4
9	12	9-1/4	5-7/8
(tolerance)	(-0, +1/2)	(±1/4)	(±1/4)

Note: A, B and C refer to Figure 1.
A. Measurement taken from top edge to bottom edge of eyelet stay.
B. Measurement taken across the top bound edge.
C. Measurement taken across the narrowest point.

3.10 Workmanship. The finished leggings shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:20Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. A certificate of compliance shall be submitted for the material identification and finish of the hardware items specified in 3.3.6.1 thru 3.3.6.7.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.4. The lot size shall be expressed in units of one legging. The sample unit for this examination shall be one legging and the selection shall be by pairs. The sample unit for pairing defects shall be one pair and defects for pairing shall be classified as a single defect.

4.4.2.1 Visual examination. The leggings shall be examined for defects in color, design, material, construction, workmanship, and marking and the defects classified in accordance with the following list.

Defects	Classification Major	Minor
PAIRING		
a. Misplaced, i.e., not one right and one left legging of same size	X	
b. Mislabeled, i.e., two leggings of same size with different sizes on label		X
c. Variation of more than 1/4 inch in length of each pair		X
d. Not secured with laces or not accomplished as specified.		X

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the currentversion before use.

Defects	Classification Major	Minor
MATERIAL DEFECT AND DAMAGE		
a. Hole, cut, tear, smash, visible mend, burn or scorched area:		
1. On outside.	X	
2. On inside (longest dimension in any direction):		
(a) -more than 1/4 inch.		X
b. Missing yarn, broken yarn, loose yarn, woven in waste, snagged thread, thin place; more than 1/2 inch (largest dimension in any direction):		
1. On outside.		X
c. Needle chew on outside:		
1. Up to 1/4 inch, inclusive.		X
2. More than 1/4 inch.	X	
CLEANNESS		
a. Spot, stain or marking on outside (largest dimension in any direction):		
1. Grease, ink or oil with dirt:		
(a) - up to 3/8 inch, inclusive		X
(b) - more than 3/8 inch	X	
2. All others including oil without dirt, more than 1/2 inch		X
b. Two or more size tickets not removed		X
c. More than three thread ends not trimmed to 1/4 inch or less on outside		X
d. More than 5 thread ends not trimmed to 1/2 inch or less on inside		X
e. Any size marking or residue on outside		X
CUTTING		
Any component part not cut in accordance with specified pattern, directional lines on patterns, or not in accordance with specification requirements	X	

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
COMPONENTS AND ASSEMBLY		
a. Any component part or required operation omitted (unless otherwise classified herein)	X	
b. Any component part not as specified	X	
c. Any component part tight, twisted, distorted pleated, or full (unless otherwise classified herein)		X
d. Any component part not approximating whiteness of other component		X
SEAMS AND STITCHINGS		
a. Accuracy of seaming:		
1. Seam puckered		X
2. Seam irregular, or pleated		X
3. Any part of legging caught in any unrelated operation or stitching	X	
4. Ends of all seams and stitching, when not caught in other seam or stitching, backtacked less than 1/2 inch		X
5. Thread breaks not secured or stitching back of the break less than 1/2 inch		X
b. Gage of stitching:		
1. Gage irregular, not within range specified, or varies more than 1/16 inch when no range is specified (score only when the condition exists on more than 1/2 the length of seam)		X
c. Open seam or stitching:		
1. -up to 1/4 inch, inclusive		X
2. -more than 1/4 inch	X	
NOTE: The seam or stitching shall be classified open when one or more stitches joining a seam or a line of stitching are broken or when two or more continuous skipped or runoff stitches occur.		
d. Raw edges:		
1. Any raw edge not securely caught in seam (use open seam classification)		

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
e. Seam and stitch type:		
1. Not specified seam or stitch type		X
2. Any line of stitching omitted	X	
3. Any line of stitching not beginning or ending where specified or misplaced		X
f. Stitch tension::		
1. Loose tension resulting in a loose seam	X	
2. Tight tension (stitch break when normal strain is applied in the direction of the seam or stitching	X	
g. Stitches per inch (score only when the condition exists on more than 1/2 the length of seam or stitching:		
1. More than the maximum specified		X
2. Less than the minimum specified:		
(a) - by one or two stitches		X
(b) - by three or more stitches	X	
h. Bartack		
1. Any missing, insecure, misplaced, or not length specified	X	
2. Loose stitch tension		X
3. Any bartack having up to (3) skipped or broken stitches	X	
4. Number of stitches more or less than specified		X
HEMS		
a. Front piece (eyelet stay):		
1. Puckered, twisted, or pleated		X
2. Irregular in width by 1/4 inch or more		X
3. Finished width less than 3/4 inch or more than 1 inch		X
b. Back piece (hook stay):		
1. Puckered, twisted, or pleated		X
2. Irregular in width by 1/4 inch or more		X
3. Finished width less than 1-7/8 inches or more than 2-1/8 inches		X

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
TAPE BINDINGS		
a. Any one omitted	X	
b. Any one misplaced, loose, not positioned or attached as specified		X
c. Any one twisted, pleated, or puckered		X
FOOTSTRAP		
a. Omitted	X	
b. Misplaced, loose, not positioned or attached as specified		X
c. Finished length less than specified	X	
d. Finished length more than specified		X
e. Any cut, tear, frayed or scalloped edge	X	
BUCKLE, BUCKLE CLIP, AND BUCKLE CLIP SECURING EYELET		
a. Omitted	X	
b. Misplaced or not securely attached		X
c. Not operational, i.e., does not serve intended purpose	X	
d. Finish omitted or not type specified		X
e. Sharp or rough edge on any part of the assembly component		X
LACES		
a. Omitted (one or both)	X	
b. Not attached as specified		X
c. Any tip of lace damaged, malformed, or insecurely attached		X
d. Any cut, tear, or abrasion mark	X	
END CLIP		
a. Omitted	X	
b. Not securely attached		X
c. Broken or malformed	X	
d. Sharp or rough edge		X

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
EYELETS, GROMMETS AND HOOKS		
a. Any omitted	X	
b. Any misplaced, not positioned or attached as specified		X
c. Finish omitted or not type specified		X
d. Any broken or malformed	X	
e. Any having sharp or rough edge		X
f. Clinched:		
* 1. Tightly, damaging or cutting adjacent material	X	
* 2. Loosely, permitting any component to rotate freely, but not to the degree that any component can be expected to become detached during use		X
* 3. Loosely, to the degree that components can be expected to become detached during use	X	
g. More than three cracks in post	X	
LABELS		
a. Omitted, incorrect, illegible, or incomplete	X	
b. Misplaced		X

4.4.2.2 Dimensional examination. The leggings shall be examined for dimensional defects. Any dimension that is not within the established tolerance, shall be classified as a defect (see 3.9).

4.4.2.3 Inspection levels and acceptable quality level. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	2.5	II
Total	6.5	II
For dimensional examination in 4.4.2.2 (one class)	2.5	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of bundles per shipping container is more or less than specified. Number of pairs of leggings per bundle is more or less than specified. Open and non-continuous heat sealed seams and closure of polyethylene bag. 1/ Omission of required vent hole in polyethylene bag. 1/

1/ For this defect, one package shall be examined from each shipping container in sample.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-16T11:20Z
Check the source to verify that this is the current version before use.

* 5.1.1 Level A. Five pairs of leggings, of one size only shall be laid out flat and evenly stacked to form a bundle. The buckle side of each bundle shall be folded in so that the width of the bundle measures approximately 11 inches. Each bundle shall be securely cross-tied with cotton tape or twine. Each pair of leggings shall be individually packaged in a close fitting flat style clear polyethylene bag of 0.00125 inch thickness (+25% tolerance). All seam enclosures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. The final closure of the bag shall be heat sealed.

5.1.2 Level C. Leggings shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. Thirty pairs of leggings, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, reversed end for end, two in length, one in width, and three in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with any suitable commercial kraft paper.

* 5.2.2 Level B. Thirty pairs of leggings, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed, and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 2A, of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, reversed end for end, two in length, one in width, and three in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with any suitable commercial kraft paper.

5.2.3 Level C. Leggings packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Contractors shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:20Z
Check the source to verify that this is the current version before use.

5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K and L, or O or P. Pallet patterns shall be in accordance with appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A if NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern or each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The leggings are intended for use by Naval Shore Patrol personnel and for ceremonial purposes.

6.2 Acquisition data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Sizes required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specified issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
e. Selection of applicable levels of packaging and packing (se 5.1 and 5.2).
f. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Suggested source for hardware. The hardware parts numbered A1396, A1365, A1128, D3219 and A1404 are manufacturing by Stimpson Co. Inc., 900 Sylvan Avenue, Bayport NY 11705, (516) 472-2000. The hardware part numbered 03745 is manufactured by North and Judd Manufacturing Co., 699 Middle Street, Middletown, CT 06457, (203) 632-2600. The hardware part numbered 2024 is manufactured by Townsend Fastener Systems, 530 West Street, Braintree, Ma (617) 848-3500.

6.5 Equal item. Prior to the use of an "or equal" item, the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency (see 3.3.6.1, 3.3.6.2, 3.3.6.3, 3.3.6.4, and 3.3.6.5).

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the currenversion before use.

* 6.6 Changes from privious issue. The margins of this specification are marked with an asterisk to indicate where changes (addition, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.7 Subject term (key word) listing.

Cloth, cotton duck
Hardware, brass
Laces, leggings

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8440-N183

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:20Z
Check the source to verify that this is the currentversion before use.

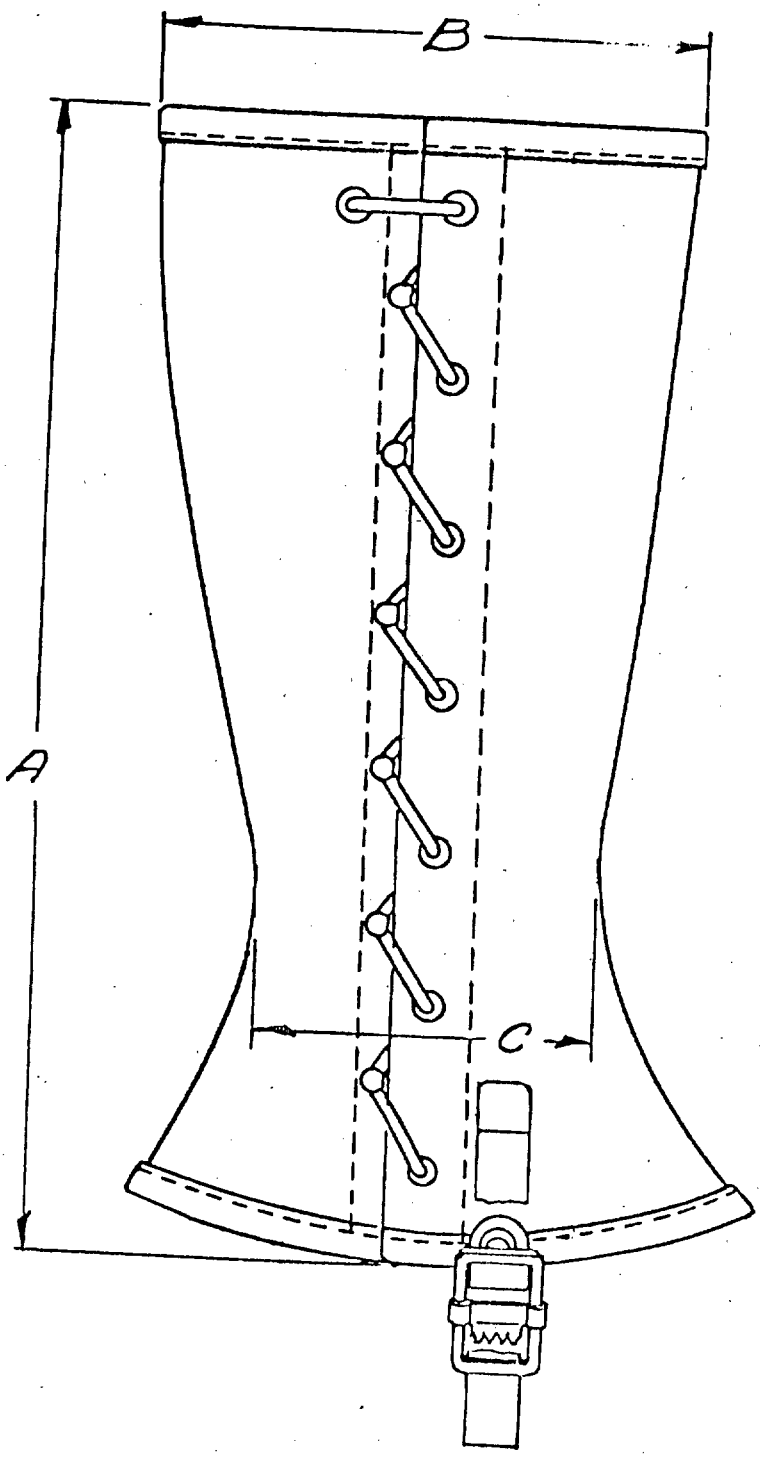


FIGURE 1 - LEGGINGS, MEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:20Z
Check the source to verify that this is the current version before use.