User activities: Army ME, AM, WC
Navy MC
Air Force

Reviewer activities: Army MI, MU, AT
Navy AS, SH, OS
Air Force 11
DSA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

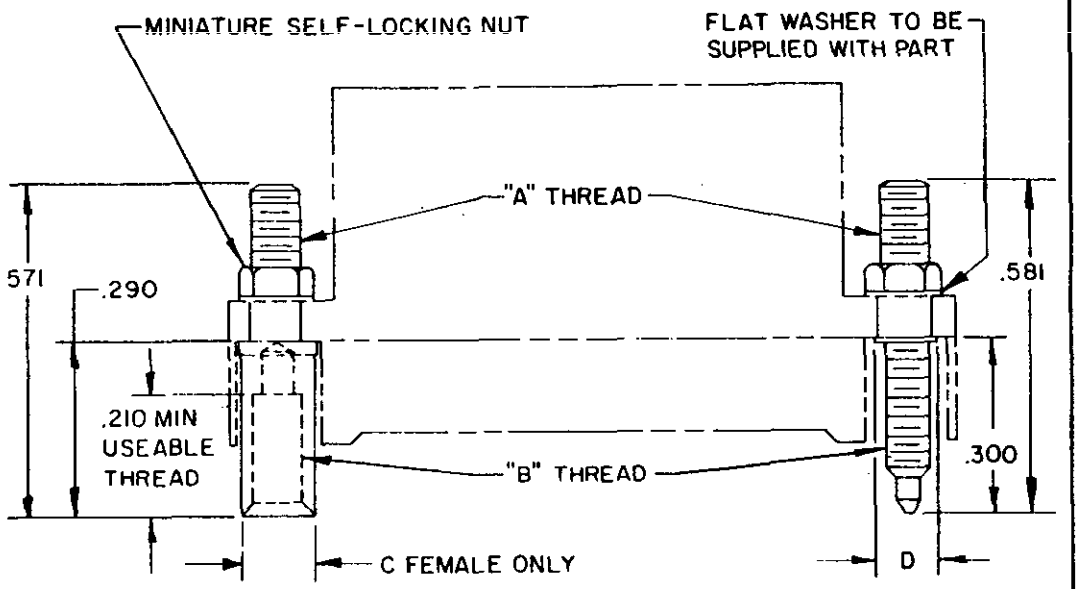

MS part no	Jackscrew type	Connector size (No of contacts)	A thread	B thread	C dia max	D square max
-1	Male	4 thru 50	2-56UNC-2A	3-48UNC-2A		.140
-2	Female	4 thru 50	2-56UNC-2A	3-48UNC-2B	.140	.140

CANCELED AFTER 4 AUGUST 1972

(A) **NO SUPERSEDING STANDARD**

INCHES	MM
.016	.41
.140	3.56
.210	5.33
.290	7.37
.300	7.62
.571	14.50
.581	14.76

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .016.
4. Washer .031 thick, supplied with all sizes, not used with shields.
5. Lubricant: Solid film lubricant on 'A' thread.
6. Material: Corrosion resistant steel per specification QQ-S-763 or QQ-S-764, class302, 303, 303Se, 304 or 316.
7. Finish: Passivated per QQ-P-35.
8. Packaging: Parts to be bagged disassembled.
9. Referenced documents shall be of the issue in effect on date of invitation for bid.
10. For design feature purposes, this standard takes precedence over procurement documents specified herein.

APPROVED 20 May 1970 REVISED (A) 4 August 1972

P.A. Navy - EC Other Cust. AF - 11 Army - EL	International Interest	TITLE JACKSCREW, ELECTRICAL, CONNECTOR, MALE & FEMALE, FIXED	MILITARY STANDARD MS 14031
Procurement Specification MIL-C-28748		SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1972-714-537/1140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.