
FED. SUP CLASS
6125

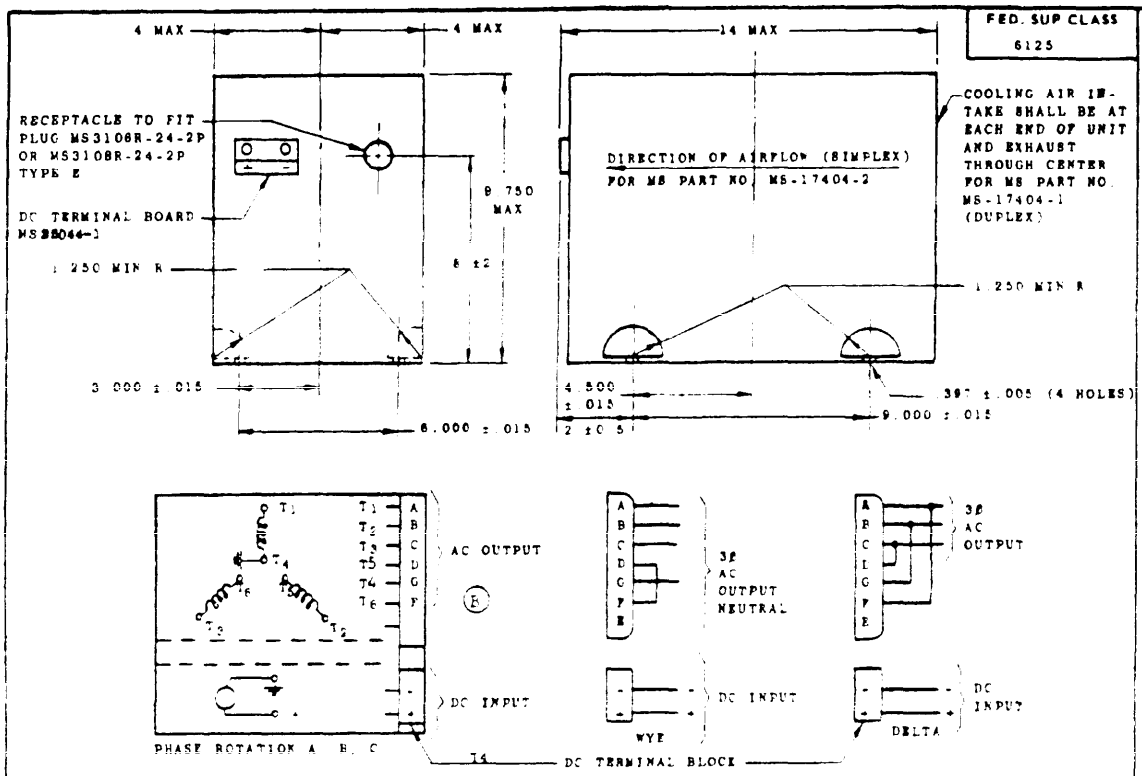

MS PART NO.	COOLING AIRFLOW
MS-17404-1	DUPLEX
MS-17404-2	SIMPLEX

CONNECTIONS EXTERNAL TO THE INVERTER NECESSARY FOR WYE (115/200 VOLT) AND DELTA (115 VOLT) CONNECTIONS. FOR 1φ CONNECTION SEE (a).

		3φ	1φ
INPUT:	VOLTS, DC	28	28
OUTPUT:	VOLTS, AC	115/200	115
	FREQUENCY, CPS	400	400
	VA TO 50,000 FEET ALTITUDE	2500	2500
	VA TO 65,000 FEET ALTITUDE	1250	1250
	PF MIN LAG, PERCENT	90	90
	PF MIN LEAD, PERCENT	95	95
	MIN OUTPUT VOLTAGE AT 200 PERCENT RATED CURRENT	50/85	50
MIN EFFICIENCY, PERCENT AT RATED LOAD, SEA LEVEL, AND 25° ±15°C		55	50
WEIGHT, POUNDS, MAX		45	45

FOR ANY COMBINATION OF CONDITIONS LISTED BELOW, THE OUTPUT VOLTAGE AND FREQUENCY SHALL REMAIN WITHIN THE INDICATED LIMITS

CONDITIONS	LIMITS VOLTAGE	LIMITS FREQ (CPS)
INPUT VOLTAGE VARIED BETWEEN 26 & 29 VOLTS. LOAD VARIED FROM NO LOAD TO FULL LOAD AMBIENT TEMPERATURE - ALTITUDE VARIED WITHIN THE RANGE ESTABLISHED BY CURVE 1 OF MS33543 EXCEPT AMBIENT TEMPERATURE SHALL NOT EXCEED 85°C RATED OUTPUT TO 50,000 FT. 50 PERCENT RATED OUTPUT TO 65,000 FEET.	LOW 110/192 HIGH 120/208	LOW 380 HIGH 410
INPUT VOLTAGE VARIED BETWEEN 26 & 29 VOLTS LOAD POWER FACTOR 1.0 LOAD VARIED FROM NO LOAD TO FULL LOAD ANY FIXED AMBIENT TEMPERATURE BETWEEN -55°C AND +85°C	LOW 111.5/198 HIGH 117.5/204	LOW 380 HIGH 410

(a) THIS INVERTER DESIGN SHALL BE SUCH THAT IT MAY BE LOADED EITHER 3φ OR 1φ BUT NOT SIMULTANEOUSLY WHEN USED AS A SINGLE-PHASE INVERTER. THE UNIT SHALL BE CONNECTED IN DELTA AND THE LOAD CONNECTED TO TERMINALS A(T_1) AND B(T_2). WHEN USED 3φ, THE LOADS PER PHASE SHALL NOT DIFFER BY MORE THAN 10 PERCENT OF THE INVERTER RATING.

NOTES:
1. DIMENSIONS IN INCHES.
2. THE AIRCRAFT MANUFACTURER SHALL ALLOW CLEARANCE OF AT LEAST ONE INCH AT EACH END OF THE INVERTER IN ADDITION TO THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.
3. FOR NAVY APPLICATION, INVERTERS WITH EITHER SIMPLEX OR DUPLEX COOLING AIRFLOW CONFIGURATION ARE ELECTRICALLY AND MECHANICALLY INTERCHANGEABLE WITH EACH OTHER.

(B) REVISED

OTHER INTERESTS: SAA - REVIEW/USER INFORMATION IS CURRENT AS OF THE DATE OF THIS DOCUMENT. DRAFT
FL - REVIEW MENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, CONTACT
CG - USER CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

APPROVED 9 JAN 1962 REVISED (A) 3 FEB 1964 (B) 20 Jan 67

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisitions shall be made from this document.

P.A. NAVY - AS Other Cust AF - 11 Army - ME	TITLE INVERTER, AIRCRAFT, 2500 VA, 3/1 PHASE, 400 CYCLE, CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17404
PROCUREMENT SPECIFICATION MIL-I-7032	SUPERSEDES MS-28000 AND MS-25097	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

OTHER INTEREST: SAA - REVIEW/USER INFORMATION IS CURRENT AS OF THE DATE OF THIS DOCUMENT.
EL - REVIEW FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT. DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.
CG - USER

4. THE WEIGHT AND DIMENSIONS SHOWN ON THIS DRAWING SHALL INCLUDE THE WEIGHT AND DIMENSIONS OF ALL AUXILIARY APPARATUS NECESSARY TO MAKE THE UNIT CONFORM TO THE PROCUREMENT SPECIFICATION.

5. PART NO. MS17404-1 SUPERSEDES MS25096-1 AND MS25097-1.
PART NO. MS17404-2 SUPERSEDES MS25096-2 AND MS25097-2.

6. A MEANS OF ADJUSTING THE VOLTAGE SHALL BE ON THE CONNECTOR END AND ABOVE THE HORIZONTAL CENTERLINE OF THE INVERTER.

7. PERMISSION OF THE PROCURING ACTIVITY SHALL BE OBTAINED FOR APPLICATION OF THIS UNIT OUTSIDE OF THE SPECIFIED LIMITS.

8. TWO PLACARDED PIN JACKS SHALL BE PROVIDED ON THE CONNECTOR END AND ABOVE THE HORIZONTAL CENTERLINE OF THE INVERTER BETWEEN WHICH THE VOLTAGE BETWEEN A(T_1) AND G(T4) CAN BE MEASURED. THE PIN JACKS SHALL ACCEPT A PROD PIN .078 ±.005 INCHES IN DIAMETER.

9. THIS UNIT SHALL BE PROVIDED WITH A STATIC SEMI-CONDUCTOR TYPE VOLTAGE AND FREQUENCY REGULATOR

10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8 JAN 1962 REVISED A 1 FEB 1971 (B) SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.