DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

USER ACTIVITIES
ARMY-CR, MI

DD FORM 1426 (REVISED) **672-1** (COORDINATED)

PREPARING ACTIVITY
NAVY-AS (Project Coord)
ARMY-AV
AIR FORCE-11

AGENCY INTEREST
INTERNATIONAL

PROCUREMENT SPECIFICATION
MIL-N-25027

SUPERSEDES
AN362, AN366, MAS680, NAS1023 IN PART

TITLE
NUT, SELF-LOCKING, PLATE, TWO LUG, LOW HEIGHT, CRES, 125 KSI F'tu, 450°F AND 800°F

(F) ENTIRE STANDARD REVISED

MILITARY STANDARD

MS21048

PAGE 1 OF 3

FED SUP CLASS
5310

5310-1532

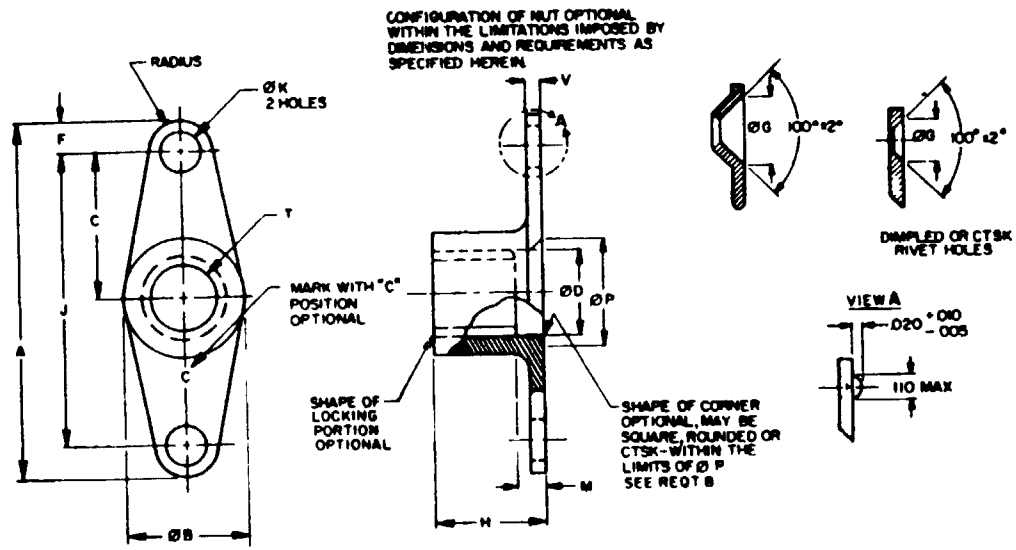


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBERS 450°F			DASH NUMBERS 800°F			T THREAD SIZE	A MAX	Ø B MAX	Ø B MIN	C ±.005	Ø D MIN	F MIN	Ø G ±.010	E 1/ MAX	J 2/ ±.002	Ø K 1/ +.005 -.000	H MIN	Ø P MAX	V MAX	AXIAL STRENGTH LBS/RUN	WEIGHT LBS/100
PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJECTION	PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJECTION																
L04	L04K	L04W	-04	-04K	-04W	112-40 UNJC-3B	948	280	195	344	---	100	200	141	680	090	---	166	047	750	14
L06	L06K	L06W	-06	-06K	-06W	138-32 UNJC-3B	948	265	239	344	---	100	200	171	680	090	---	306	047	1,130	18
L08	L08K	L08W	-08	-08K	-08W	164-32 UNJC-3B	948	297	277	344	168	100	200	250	680	090	062	248	047	1 720	28
L3	L3K	L3W	-3	-3K	-3W	190-32 UNJF-3B	948	328	308	344	194	100	200	250	680	090	062	276	047	2 460	29
L4	L4K	L4W	-4	-4K	-4W	250-28 UNJF-3B	1 260	414	375	500	254	100	200	.281	1 000	090	062	346	055	4,500	51
L5	L5K	L5W	-5	-5K	-5W	3125-24 UNJF-3B	1 292	505	485	500	317	125	230	328	1 000	130	062	417	065	7 390	90
L6	—	L6W	-6	—	-6W	375-24 UNJF-3B	1 292	614	594	500	379	125	230	344	1 000	130	062	505	075	11,450	1 11
L7	—	L7W	-7	—	-7W	4375-20 UNJF-3B	1 417	726	695	6	442	156	230	390	1 125	161	062	602	085	15 450	1 84
L8	—	L8W	-8		-8W	500-20 UNJF-3B	1 602	859	796	625	52	156	230	609	1 250	16	062	660	115	21 110	4 80
L9	—	L9W	-9	—	-9W	5625-18 UNJF 3B	1 727	951	902	688	584	156	230	656	1 375	161	062	701	15	26 810	5 70
L10	—	L10W	-10	—	-10W	625-18 UNJF-3B	1 852	1 016	964	750	646	156	230	765	1 500	161	062	756	115	34 130	8 60

1/ MINIMUM "H" NOT SPECIFIED. LIMITED ONLY BY STRENGTH REQUIREMENTS (IF SPECIFICATION
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005
3/ DIMPLED RIVET HOLE TOLERANCE FOR Ø "B" IS +.015 -.000

APPROVED 12 JUN 64 REVISED (F) 30 SEP 87

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 MATERIAL CORROSION RESISTANT STEEL, TYPE A286, (UNS S66286, IN ACCORDANCE WITH AMS5525, AMS5732 OR AMS5737

2 FINISH ONLY 800°F NUTS SILVER PLATE ALL THREADED SURFACES OF NUT ELEMENT IN ACCORDANCE WITH AMS 2410 THREADS SHALL SHOW COMPLETE COVERAGE SILVER PLATING ON ALL OTHER SURFACES OPTIONAL TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION

3 LUBRICANT ONLY 450°F NUTS DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-M-25027

4 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M.

5 HARDNESS 49HRC, MAX.

6 THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879


7 SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI B46.1.

8 COUNTERBORE/COUNTERSINK ON SIZE 164 AND LARGER, COUNTERBORE THREAD "D" DIAMETER X .062 DEEP MINIMUM THREAD RELIEF, ON SIZE 138 AND SMALLER, COUNTERSINK TO "P" DIAMETER WITHIN THE LIMITS OF D, P AND M.

9. PERFORMANCE SEE PROCUREMENT SPECIFICATION, EXCEPT 450°F DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES.

10 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21048L4R



MS21048L4R INDICATES NUT, SELF-LOCKING, PLATE, TWO LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450°F, DRY FILM LUBRICATION, 250-28 UNJF-3B, COUNTERSUNK OR DIMPLED HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

APPROVED 12 JUN 64 REVISED (F) FOR CHANGES SEE PAGES 1,2 AND 3

USER ACTIVITIES
ARMY-CR, MI

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Distribution for all new engineering and design applications and for reprocure use shall be made from this document unless applicable

P.A. NAVY-AS Other Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, TWO LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450° AND 800°F	MILITARY STANDARD MS21048
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES AN362, AN366, NAS680, NAS1023 IN PART		PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5310

INTERCHANGEABILITY RELATIONSHIP

MS21048 NUTS CAN UNIVERSALLY REPLACE AN362, AN366, NAS680 AND NAS1023 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), AND FASTENING METHOD (PLAIN RIVET HOLES; DIMPLED OR COUNTERSUNK RIVET HOLES OR PROJECTION WELDING), BUT THESE AN362, AN366, NAS680 AND NAS1023 NUTS CANNOT UNIVERSALLY REPLACE MS21048 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBER	SUBSTITUTIVE PART NUMBER	CANCELLED PART NUMBER	SUBSTITUTIVE PART NUMBER
NAS1023CD4	MS21048-04	NAS1023C6	MS21048-6
NAS1023CD4K	MS21048-04K	NAS1023C6W	MS21048-6W
NAS1023CD4W	MS21048-04W	NAS1023C7	MS21048-7
NAS1023CD6	MS21048-06	NAS1023C7W	MS21048-7W
NAS1023CD6K	MS21048-06K	NAS1023C8	MS21048-8
NAS1023CD6W	MS21048-06W	NAS1023C8W	MS21048-8W
NAS1023CD8	MS21048-08	NAS1023C9	MS21048-9
NAS1023CD8K	MS21048-08K	NAS1023C9W	MS21048-9W
NAS1023CD8W	MS21048-08W	NAS1023C10	MS21048-10
NAS1023C3	MS21048-3	NAS1023C10W	MS21048-10W
NAS1023C3K	MS21048-3K	—	—
NAS1023C3W	MS21048-3W	—	—
NAS1023C4	MS21048-4	—	—
NAS1023C4K	MS21048-4K	—	—
NAS1023C4W	MS21048-4W	—	—
NAS1023C5	MS21048-5	—	—
NAS1023C5K	MS21048-5K	—	—
NAS1023C5W	MS21048-5W		

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS			SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS			SUBSTITUTIVE PART NUMBERS
—	—	NAS680CD4	MS21048-04	—	—	NAS680C3N	MS21048L3
—	—	NAS680CD4K	MS21048-04K	—	—	NAS680C3NK	MS21048L3K
—	—	—	MS21048-04W	—	AN366MC1032	—	MS21048L3W
—	—	NAS680CD4M	MS21048L04	AN362C428	—	NAS680C4	MS21048-4
—	—	NAS680CD4MK	MS21048L04K	—	—	NAS680C4K	MS21048-4K
—	—	—	MS21048L04W	AN362MC428	—	—	MS21048-4W
AN362C632	—	NAS680CD6	MS21048-06	—	AN366MC428B	—	MS21048L4W
—	—	NAS680CD6K	MS21048-06K	—	—	NAS680C4M	MS21048L4
AN362MC632	—	—	MS21048-06W	—	—	NAS680C4MK	MS21048L4K
—	AN366MC632B	—	MS21048L06W	—	AN366MC428	—	MS21048L4W
—	—	NAS680CD6M	MS21048L06	AN362C524	—	NAS680C5	MS21048-5
—	—	NAS680CD6MK	MS21048L06K	—	—	NAS680C5K	MS21048-5K
—	AN366MC632	—	MS21048L06W	AN362MC524	—	—	MS21048-5W
AN362C832	—	NAS680CD8	MS21048-08	—	—	NAS680C5N	MS21048L5
—	—	NAS680CD8K	MS21048-08K	—	—	NAS680C5NK	MS21048L5K
AN362MC832	—	—	MS21048-08W	—	AN366MC524	—	MS21048L5W
—	AN366MC832B	—	MS21048L08W	AN362C524	—	NAS680C6	MS21048-6
—	—	NAS680CD8M	MS21048L08	AN362MC524	—	—	MS21048-6W
—	—	NAS680CD8MK	MS21048L08K	—	—	NAS680C6N	MS21048L6
—	AN366MC832	—	MS21048L08W	—	AN366MC524	—	MS21048L6W
AN362C1032	—	NAS680C3	MS21048-3	—	—	NAS680C7	MS21048-7
—	—	NAS680C3K	MS21048-3K	—	—	—	MS21048-7W
AN362MC1032	—	—	MS21048-3W	—	—	—	MS21048L7
—	AN366MC1032B	—	MS21048L3W	—	—	—	MS21048L7W

USER ACTIVITIES
ARMY-CR, MI

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Distribution for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 12 JUN 64 REVISED (F) FOR CHANGES SEE PAGES 1, 2 AND 3

PA NAVY-AS
Other Cust ARMY-AV
AIR FORCE-11

INTERNATIONAL INTEREST

TITLE
NUT, SELF-LOCKING, PLATE, TWO LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450° AND 800° F

MILITARY STANDARD
MS21048

PROCUREMENT SPECIFICATION
MIL-N-25027

SUPERSEDES
AN362, AN366, NAS680, NAS1023 IN PART

PAGE 3 OF 3

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5310-1532

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.