
FED. SUP CLASS
4730

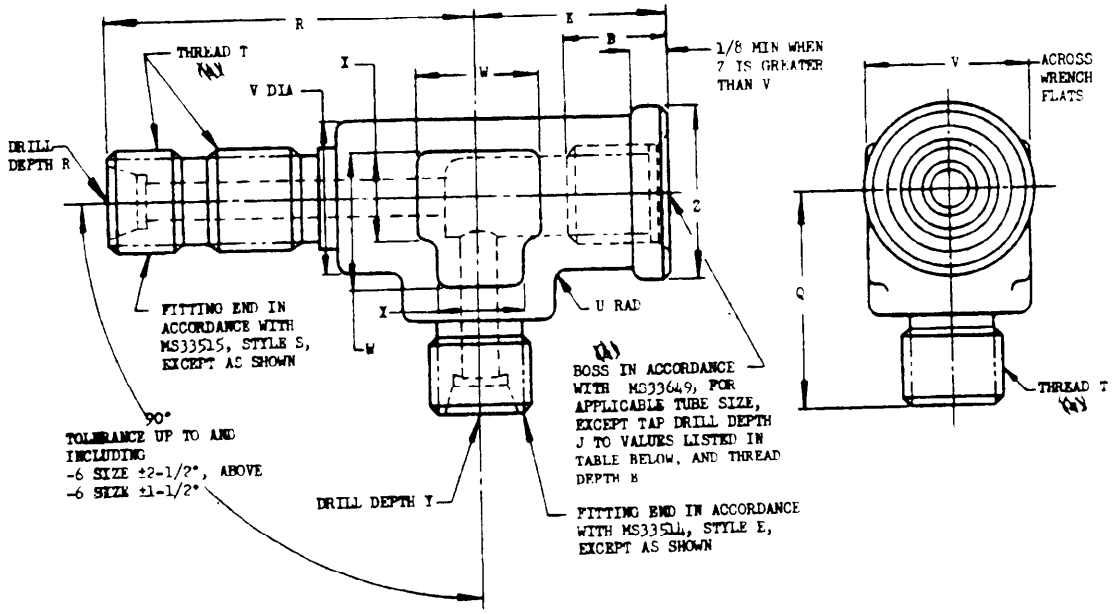

DASH NO.	TUBE OD	THREAD T (4) MIL-S-8879	B MIN	J +3/64 -0	K +3/64 -0	Q +3/64 -0	R +3/64 -0	U RAD	V	W APPROX (H)	X APPROX (H)	Y +3/64 -0	Z DIA	WT STEEL (H)	WT LB AL ALLOY (H)	WT LB MAX TI ALLOY (H)
-2	1/8	.3125-24 UNJF-3A	.375	23/32	5/8	27/32	1- 3/8	1/16	1/2	15/32	5/16	27/32	9/16	.051	.018	.029
-3	3/16	.3750-24 UNJF-3A	.406	13/16	11/16	29/32	1-29/64	3/32	9/16	1/2		29/32	5/8	.105	.039	.060
-4	1/4	.4375-20 UNJF-3A	.438	29/32	3/4	1- 3/32	1-43/64		3/4	11/16	7/16	1- 3/32	3/4	.206	.067	.118
-5	5/16	.5000-20 UNJF-3A		15/16										.230	.075	.132
-6	3/8	.5625-18 UNJF-3A	.469	1- 1/32	13/16	1- 5/32	1-57/64	1/8	7/8	25/32		1- 3/16	7/8	.283	.112	.163
-8	1/2	.7500-16 UNJF-3A	.562	1- 1/4	1	1-11/32	2- 1/32		1-1/16	29/32	1/2	1- 3/8	1- 1/16	.360	.148	.207
-10	5/8	.8750-14 UNJF-3A	.625	1-15/32	1- 5/32	1- 1/2	2- 1/4					1- 5/8	1- 3/16	.450	.179	.259
-12	3/4	1.0625-12 UNJ-3A	.688	1- 3/4	1-11/32	1-41/64	2- 7/16		1-5/16	1- 3/32	5/8	1-45/64	1- 7/16	.850	.284	.490
-16	1	1.3125-12 UNJ-3A		2- 1/16	1-17/32	1-27/32	2-21/32		1-5/8	1- 5/16	3/4	1- 7/8	1-11/16	1.100	.410	.634
-20	1-1/4	1.6250-12 UNJ-3A		2- 5/16	1-23/32	1-63/64	2-51/64		1-7/8	1- 1/2	7/8	1-63/64	2	1.540	.600	.888

(H) ~~(a.) PARTS WITH THREADS IN ACCORDANCE WITH MIL-S-7742 OF THE SAME THREAD SIZE, PITCH AND TOLERANCE CLASS ARE ACCEPTABLE FOR PROCUREMENT UNTIL 1 JULY 1993, BUT PARTS WITH MIL-S-7742 THREADS WILL NOT BE PROCURED THEREAFTER. EXISTING STOCKS ARE TO BE USED UNTIL EXHAUSTED.~~

(H) ~~(b.) PARTS WITH BOSS IN ACCORDANCE WITH AND10056 FOR THE APPLICABLE TUBE SIZE ARE ACCEPTABLE FOR PROCUREMENT UNTIL 1 JULY 1993, BUT PARTS WITH THE AND10056 BOSS WILL NOT BE PROCURED THEREAFTER. EXISTING STOCKS ARE TO BE USED UNTIL EXHAUSTED.~~

(H) DENOTES CHANGES

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Navy - AS Other Cust USAF - 99 Army-AV	SEE NOTE 7	TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON RUN	MS21911
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 Coordination PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO. 4730-0155
ASD use only

APPROVED 4 Oct 51 REVISED (A) 28 Jun 54 (B) 3 Jun 55 (C) 2 May 56 (D) 30 Jan 57 (E) 13 Nov 58 (F) 27 June 69 (G) 1 DEC 69 (H) 26 JUNE 1981

User activities: Navy - OS
Army - CL, CR, ME, AT

Review activities: USAF - 11
Army - AR, MI
DLA - CS

This military standard is approved by the Department of Defense and is mandatory for use by all activities. Submission for all new engineering and design applications and for repetitive use should be made from this document.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T14:41Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

NOTES:

1. MATERIAL: STEEL - FORGINGS
ALUMINUM ALLOY - FORGINGS
CORROSION RESISTANT STEEL - FORGINGS
(H) TITANIUM ALLOY - FORGINGS
(H) SEE PROCUREMENT SPECIFICATION
NOTE: PARTS MADE FROM 1137 OR 1141 FORGINGS QUALIFIED TO MIL-F-18280C SHALL NOT BE SUPPLIED AFTER 30 JUNE 1984.

2. FINISH: SEE PROCUREMENT SPECIFICATION.

3. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

5. PART NUMBERS:
NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
ADD T IN PLACE OF DASH FOR ALUMINUM ALLOY (2014).
ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
~~ADD C AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 303, 303, 304, 316, OR 321.~~
ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE ~~304L AND~~ 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 27 JUNE 1969.
(H) ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V)

EXAMPLES OF PART NUMBERS:
MS21911-4 - TEE, 1/4 TUBING, CARBON STEEL.
MS21911T4 - TEE, 1/4 TUBING, ALUMINUM ALLOY (2014).
MS21911W4 - TEE, 1/4 TUBING, ALUMINUM ALLOY (7075).
MS21911J4 - TEE, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
MS21911K4 - TEE, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
MS21911S4 - TEE, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
(H) MS21911-4T - TEE, 1/4 TUBING, TITANIUM ALLOY (6AL-4V)

(H) 6. ~~PARTS CODED C ARE INACTIVE FOR DESIGN AFTER 27 JUNE 1969. PARTS CODED C MAY BE USED UNTIL STOCKS ARE EXHAUSTED. PARTS CODED J OR K MAY BE USED IN LIEU OF PARTS CODED C.~~
(H) ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED J, K, OR S (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

7. CERTAIN PROVISIONS (SCREW THREADS, BOSS DIMENSIONS AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(H) 8. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

User activities: Navy - OS
Army - GL, CR, ME, AF

Review activities: USAF - 11
Army - AR, MI
DLA - CS

APPROVED 4 Oct 51 REVISED (H) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - AS Other Cust USAF - 99 Army-AT	INTERNATIONAL INTEREST SEE NOTE 7	TITLE TEE, BULKHEAD, FLARELESS TUBE, INTERNAL THREAD ON RUN	MILITARY STANDARD MS21911
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 2 OF 2

DD FORM 672-1 (Coordinated)
ASC use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:41Z
Check the source to verify that this is the current version before use.