INCH-POUND

MS24361C
18 April 2016
SUPERSEDING
MS24361B
15 May 1961

DETAIL SPECIFICATION SHEET

RING, SPLIT – TYPE MA-2, FLIGHT PRESSURE REFUELING, RECEPTION COUPLING

Reactivated after 18 April 2016, and may be used for new and existing designs and acquisitions.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the procurement specification MIL-PRF-81975, Couplings, Regulated, Aerial Pressure Refueling Type MA-2, Type MA-3 and Type MA-4.

Comments, suggestions, or questions on this document should be addressed to Air Force Sustainment Center - Oklahoma City/AFLCME/LZPES, 3001 Staff Drive, Suite 1AB81A, Tinker AFB, OK 73145 or emailed to ocalc.dsp@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 1680

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

For design feature purposes, this specification sheet takes precedence over procurement documents referenced herein. Referenced documents shall be of the issue in effect on date of invitation for bid. In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification shall take precedence.

REQUIREMENTS:

1. (a) Must be stocked as matched unit only.
2. Material: 4130 Chrome-Molly Steel Tubing, SAE-AMS-6360.
3. Finish: Cadmium Plate, SAE-AMS-QQ-P-416, Type II, Class B.
4. Surface Roughness: 125/ all surfaces prior to plating, ASME-B46.1.
5. Remove all burrs and break sharp edges .010 to .020.
6. Dimensions in inches. Unless otherwise specified, Tolerances: Decimals +/- .010, Angles +/- 2 º.

NOTES:

This document references the following:

ASME-B46.1, Surface Texture, (Surface Roughness, Waviness and Lay) (DoD Adopted)


(Copies of this document are available from http://www.asme.org/.)

SAE-AMS-QQ-P-416, Plating, Cadmium (Electrodeposited)
SAE-AMS-6360, Tubing, Chrome-Molybdenum (4130 or 8630) Steel, Seamless and Welded

(Copies of this document are available from http://www.sae.org/.)

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

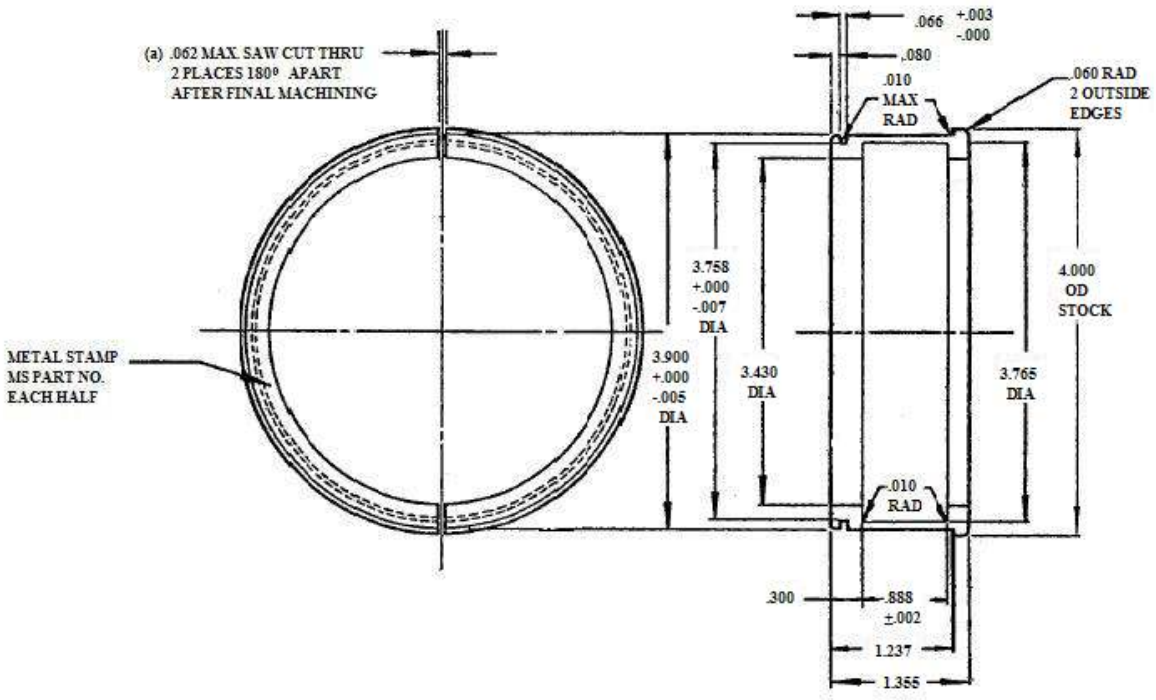

DASH NO.	MAX WT LB
-1	2.000

FIGURE 1. Ring, split – Type MA-2, flight pressure refueling, reception coupling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS
Air Force - 71

Preparing activity:
Air Force - 71

(Project 1680-2016-007)

Reviewer activities:
Air Force – 99
DLA - GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.