FED. SUP CLASS
4730

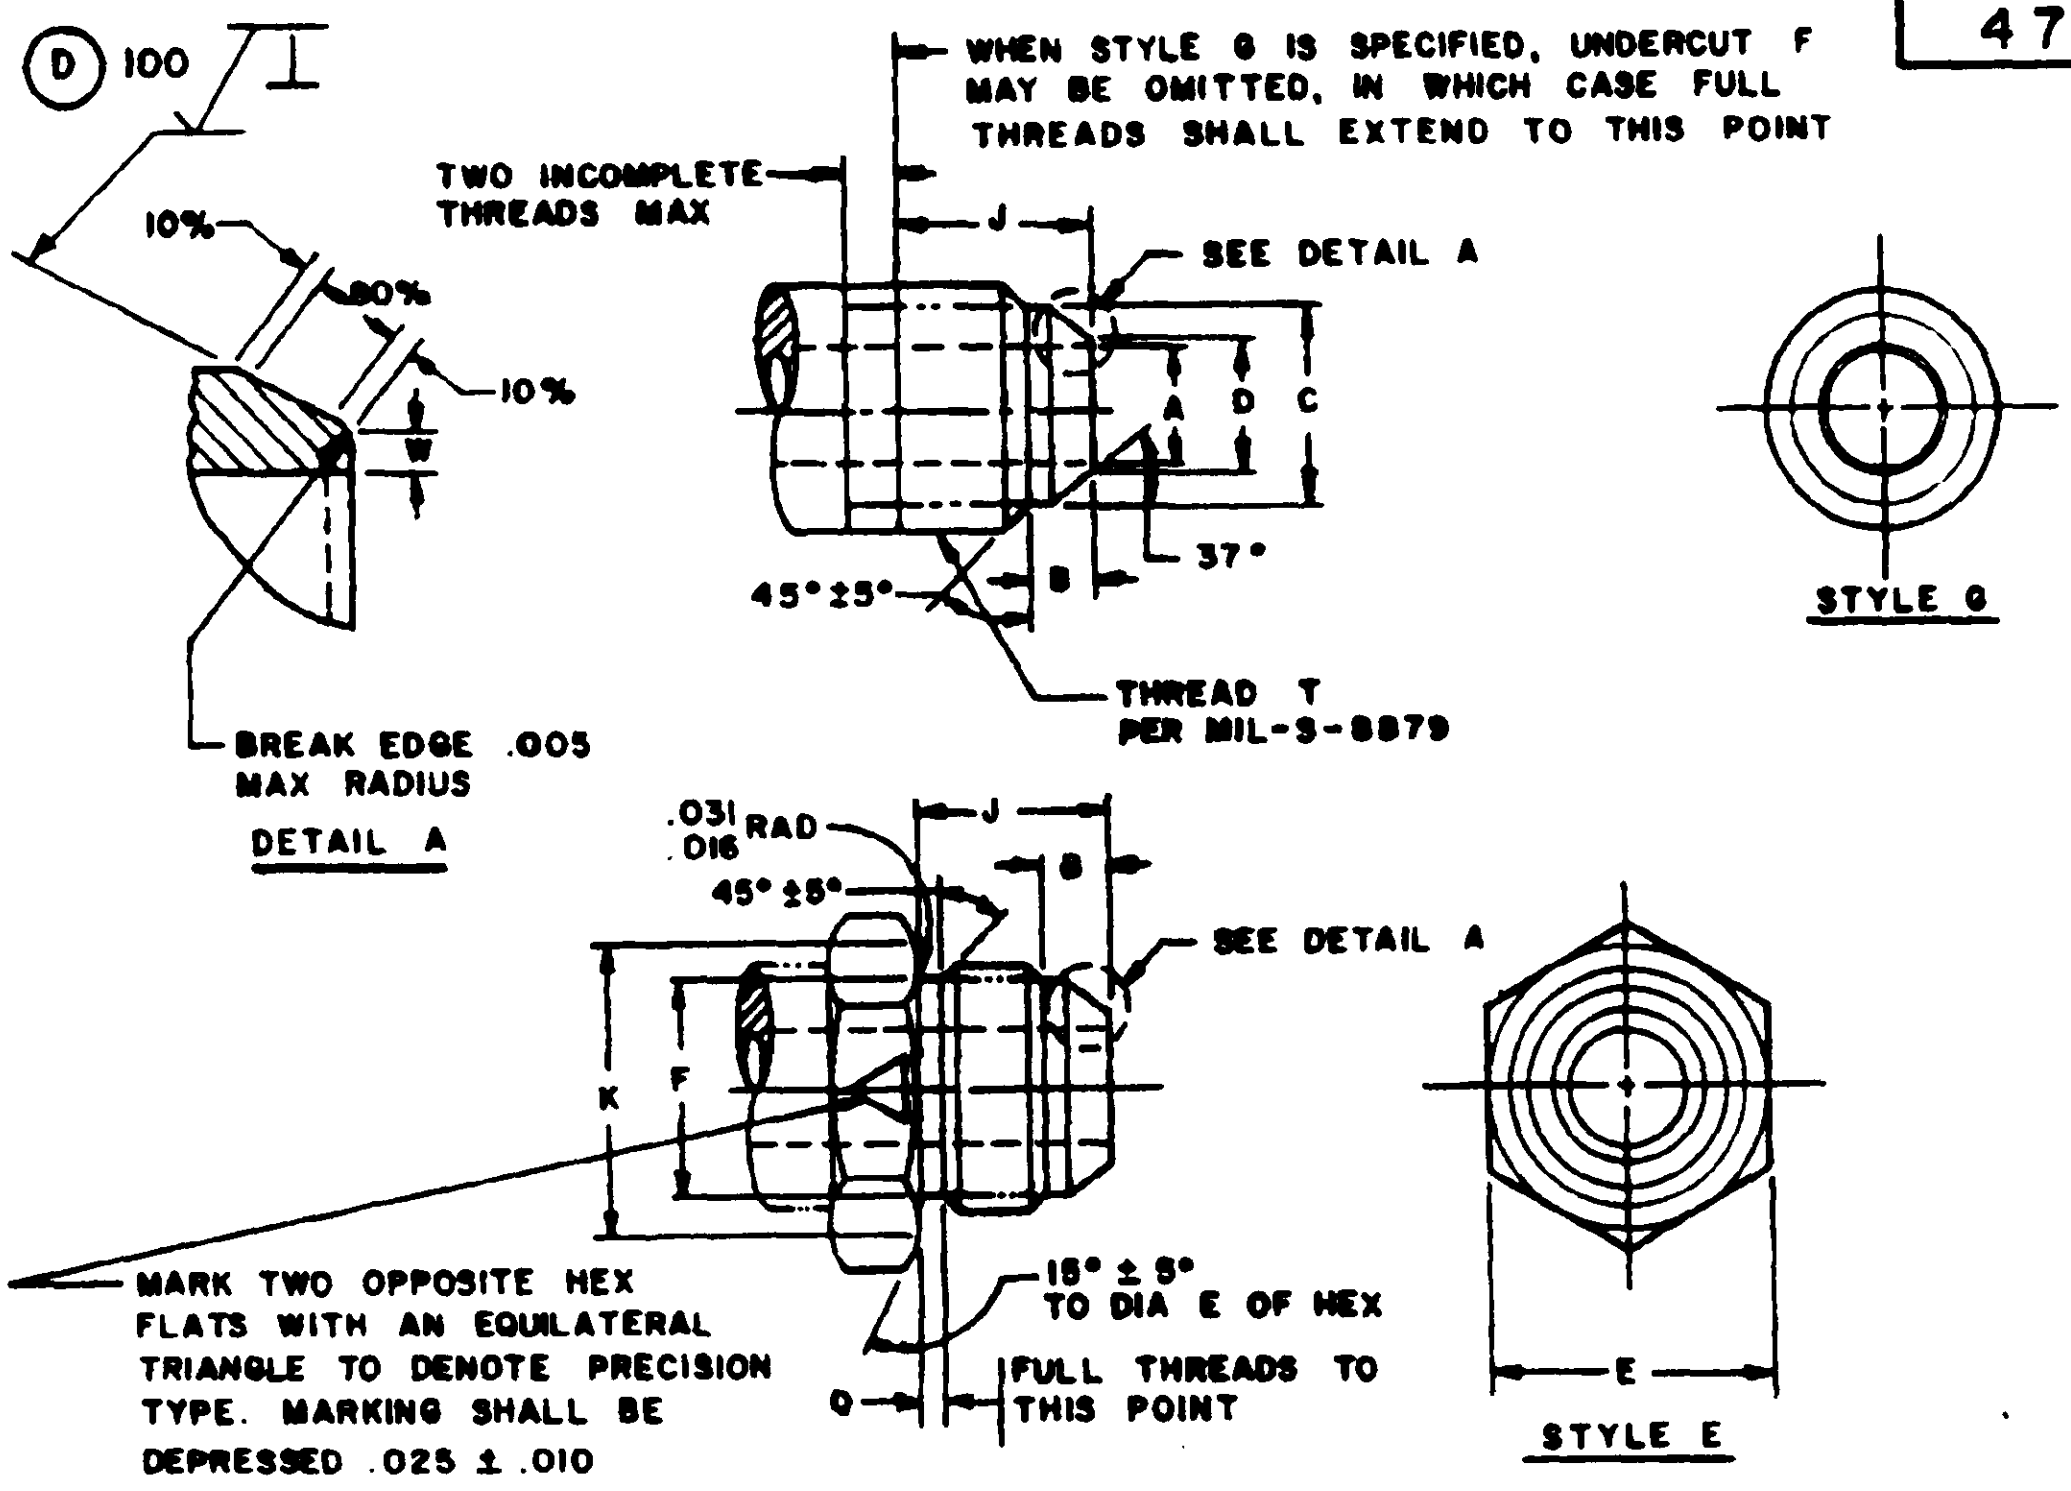

(D) 100
10%
80%
10%
W
BREAK EDGE .005 MAX RADIUS
DETAIL A
TWO INCOMPLETE THREADS MAX
WHEN STYLE G IS SPECIFIED, UNDERCUT F MAY BE OMITTED, IN WHICH CASE FULL THREADS SHALL EXTEND TO THIS POINT
J
SEE DETAIL A
A
D
C
37°
45° ±5°
B
THREAD T PER MIL-S-8879
STYLE G
.031 .016 RAD
J
B
45° ±5°
SEE DETAIL A
K
F
MARK TWO OPPOSITE HEX FLATS WITH AN EQUILATERAL TRIANGLE TO DENOTE PRECISION TYPE. MARKING SHALL BE DEPRESSED .025 ± .010
15° ± 5° TO DIA E OF HEX
FULL THREADS TO THIS POINT
Q
E
STYLE E

(D) THE CONICAL SEAL SURFACE SHALL BE FREE OF FLAWS, NICKS AND CHATTER MARKS WHEN VIEWED WITH THE UNAIDED EYE. THE CENTER 80% OF THE SURFACE (SEE DETAIL A) SHALL ALSO HAVE NO LOW SPOTS AND SHALL HAVE AN UNBROKEN LINE OF CONTACT TO SHOW ALL AROUND WHEN ROTATED IN CONTACT 74°0' ± 1' INCLUDED ANGLE GAGE LIGHTLY COATED BY RUBBING WITH CARBON PAPER OR BY AN EQUIVALENT BLUEING METHOD.

SQUARENESS BETWEEN THREAD T (PITCH DIA) AND FACE OF HEX SHALL NOT EXCEED H WHEN MEASURED AT DIA K.

THE FACE OF THE HEX AND THE THREAD RELIEF SHALL BE 32AA MAX. FREE FROM BURRS, HAVING NO LONGITUDINAL OR SPIRAL TOOL MARKS. ANNULAR TOOL MARKS PERMISSABLE TO 32AA MAX.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

DEMINSIONS D, C , F AND T (PITCH DIA) SHALL BE CONCENTRIC TO EACH OTHER AND WITH THE 37°ANGLE, MEASURED AND CALCULATED AS AN INCLUDED ANGLE, WITHIN .005 TOTAL INDICATOR READING. OTHER DIAMETERS SHALL BE CONCENTRIC WITHIN .010 TIR.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ± 1/2°, DECIMALS ± .016.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS.

SURFACE ROUGHNESS IN ACCORDANCE WITH ANSI B46.1.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS

FITTINGS WITH MIL-S-7742 THREADS OF THE SAME SIZE, PITCH AND TOLERANCE CLASS MAY BE USED UNTIL STOCKS ARE EXHAUSTED, BUT ARE NOT TO BE SUPPLIED AFTER 1JAN 1976.

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER.

(D) DENOTES CHANGES

APPROVED 12 FEB 57 REVISED (C) 25 OCT 74 (D) 1 FEB 85

Review activities:
DLA-CS

This military standard is approved by the San Antonio ALC (Code 82), Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A.
AIR FORCE - 82
Other Cust
AIR FORCE - 99

TITLE
FITTING END, FLARED TUBE CONNECTION, PRECISION TYPE, STANDARD DIMENSIONS

MILITARY STANDARD
MS24385(USAF)
SHEET 1 OF 2

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

DD FORM 1 SEP 57 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project Number 4730-F684

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:53Z
Check the source to verify that this is the currentversion before use.

This military standard is approved by the San Antonio ALC (Code 82), Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Review activities:
DLA-CS

FED. SUP CLASS
4730

EQUIV-ALENT TUBE SIZE DASH NO	TUBING OD	THREAD T MIL-S-8879	A DIA		B +.015 -.000	C +.000 -.006 DIA	D ±.003 DIA	E		F +.002 -.003	H MAX	J ±.015	K ±.010 DIA	Q +.015 -.000	W MIN
-2	1/8	5/16-24UNJF-3A	.062	+.003 -.004	.177	.245	.083	.563	+.003 -.004	.250	.005	.448	.500	.063	.005
-3	3/16	3/8-24UNJF-3A	.125			.307	.146	.625		.312		.479	.562		
-4	1/4	7/16-20UNJF-3A	.172		.193	.359	.193	.688		.364		.550	.625	.075	
-5	5/16	1/2-20UNJF-3A	.234			.421	.255	.750		.426			.687		
-6	3/8	9/16-18UNJF-3A	.297	±.004	.198	.476	.318	.813		.481		.556	.750	.083	
-8	1/2	3/4-16UNJF-3A	.391		.253	.654	.426	1.000		.660		.657	.937	.094	.012
-10	5/8	7/8-14UNJF-3A	.484		.266	.767	.539	1.125		.773		.758	1.062	.107	.022
-12	3/4	1-1/16-12UNJ-3A	.609	±.005	.315	.938	.664	1.375		.945	.008	.864	1.274	.125	
-16	1	1-5/16-12UNJ-3A	.844	+.007 -.005		1.188	.913	1.625	±.016	1.195		.911	1.524		.029
-20	1-1/4	1-5/8-12NJ-3A	1.078	+.008 -.005	.367	1.501	1.147	1.875		1.507		.958	1.838		
-24	1-1/2	1-7/8-12NJ-3A	1.312		.378	1.750	1.381	2.125	±.020	1.756		1.083	2.093		.044
-28	1-3/4	2-1/4-12UNJ-3A	1.547	+.010 -.005	.451	2.125	1.646	2.500		2.131		1.208	2.468		
-32	2	2-1/2-12UNJ-3A	1.781		.461	2.375	1.880	2.750		2.381		1.333	2.718		

APPROVED 12 FEB 57 REVISED Ⓒ 25 OCT 74 Ⓓ

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER

P.A. AIR FORCE-82 Other Cust AIR FORCE 99	TITLE FITTING END, FLARED TUBE CONNECTION, PRECISION TYPE, STANDARD DIMENSIONS	MILITARY STANDARD MS24385(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Limited coordination)
ASO use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project Number 4730-F684

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:53Z
Check the source to verify that this is the currentversion before use.