


INACTIVE FOR NEW DESIGN AFTER 30 SEPT 1987
NO SUPERSEDING STANDARD

FED. SUP CLASS
5945

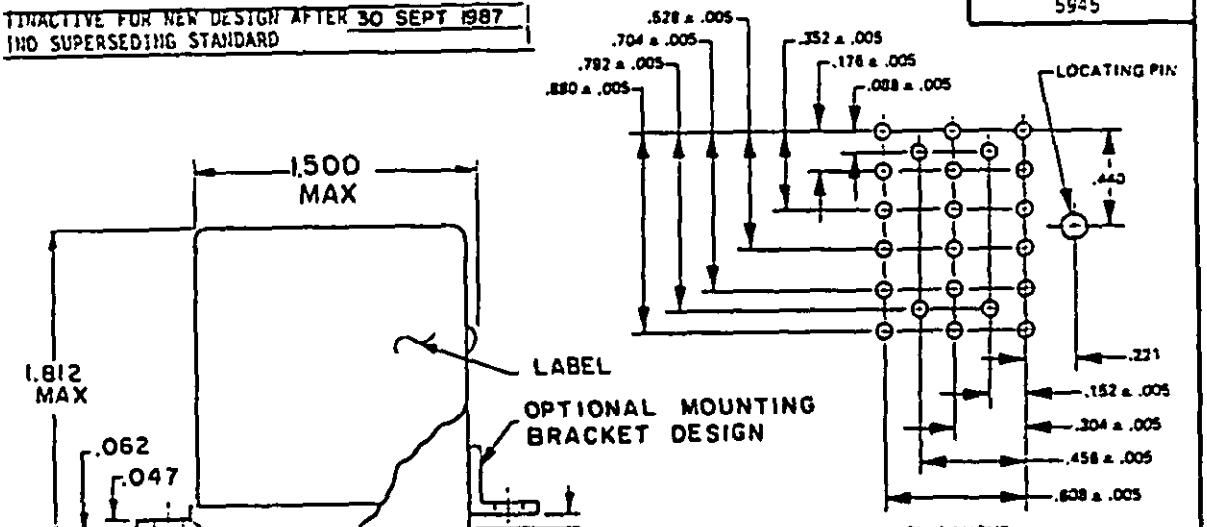


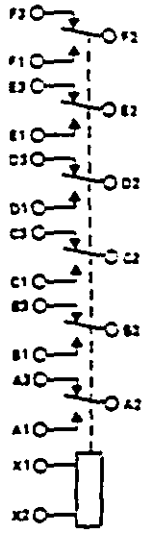

CIRCUIT DIAGRAM D1

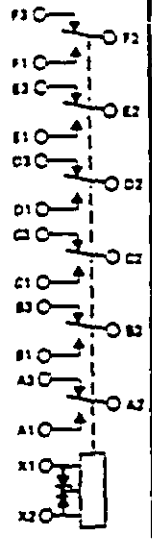

CIRCUIT DIAGRAM A1 (SEE NOTE 5)

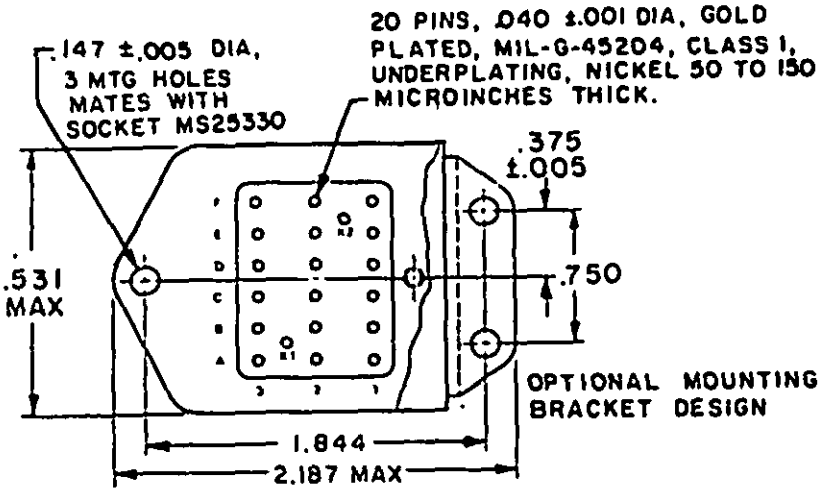

Ⓛ ENTIRE STANDARD REVISED

APPROVED 12 May 1958. REVISED Ⓛ 30 SEPT 1987

User activities: Army - Navy - Air Force -
Review activities: Army - EC Navy - Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	International Interest	TITLE	MILITARY STANDARD
AF - 85 Other Cust Navy - AS		RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE I, SOCKET MOUNTED, HERMETICALLY SEALED	MS25329
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 1 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5945-0767-02

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.093	2.36	.344	8.74	.750	19.05
.005	0.13	.147	3.73	.352	8.94	.792	20.12
.008	0.20	.152	3.86	.375	9.53	.880	22.35
.040	1.02	.176	4.47	.458	11.63	1.500	38.10
.047	1.19	.203	5.16	5.28	13.41	1.531	38.89
.062	1.57	.221	5.61	.608	15.44	1.812	46.02
.088	2.24	.304	7.72	.704	17.88	1.644	46.84
						2.187	55.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm).
4. Terminal numbers shall not appear on relay headers. There shall be affixed to the relay a suitable legible circuit diagram that positively and permanently identifies each terminal location specified herein.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.
6. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
8. Pins to be perpendicular to header surface within one degree.

TABLE I. Dash numbers and characteristics.

Dash number MS25329-	Type	Coil	Terminal type	Max weight in pounds
D1	I	dc	Plug in	0.4
A1	I	ac	Plug in	0.4

APPROVED 12 May 1958 REVISED (L) ENTIRE STANDARD REVISED

User activities: Army - Navy - Air Force -
Review activities: Army - EC Navy - Air Force - 11, 99
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated/previous editions of this form are obsolete)

Procurement Specification MIL-R-6106

P.A AF - 85
Other Cust Navy - AS

International Interest

SUPERSEDES:

TITLE
RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE I, SOCKET MOUNTED, HERMETICALLY SEALED

MILITARY STANDARD

MS25329

PAGE 3 OF 5

TABLE II. Operating characteristics.

MS part no. MS25329-	Coil data											Time - (milliseconds maximum)					
	Coil	Nominal			Max		Max pick-up voltage			Drop-out voltage 2/	Hold voltage 2/	Operate 3/	Release 4/	Bounce			
														Main		Aux	
		Volts 1/	Freq. Hz	Res Ω	Volts	Amperes	Normal 2/	High temp test	Cont current test					NO	NC	NO	NC
D1	X1, X2	28	dc		29	0.18	18	19.8	22.5	1.5	7.0	25	20	2	2		
A1	X1, X2	115	400 5/		122	0.04	90	95	103	5.0	30	25	50	2	2		

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With nominal coil voltage.
4/ From nominal coil voltage.
5/ MS25329-A1 may be used on 60 Hz if maximum ambient temperature is limited to 85°C, maximum current will be 0.044 ampere.

FED. SUP CLASS 5945

APPROVED 12 May 1958 REVISED (L) ENTIRE STANDARD REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - 11, 99

User activities: Army -
Navy -
Air Force -

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Intmd current		Applicable per specification												

1/ Absence of value indicates relay is not rated for 3 phase applications.
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

FED. SUP CLASS 5945

APPROVED 12 May 1957 REVISED (L) ENTIRE STANDARD REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

Environmental characteristics

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 g's
Duration	11 ms
Max duration contact opening	10 µs
Vibration - Sinusoidal	
G-level	10 g's
Frequency range	5 - 1,500 Hz
Non operate:	
G-level	15 g's
Frequency range	70 - 2,000 Hz
Acceleration	15 g's

Quality conformance inspection

Performance of groups B and C tests are not applicable.

Electrical characteristics

Insulation resistance, initial	100 megohms
After life or environmental tests,	50 megohms

Dielectric strength (sea level)

	Initial	After life tests
Coil to case	1,000 V rms	1,000 V rms
Aux contacts		
All other points	1,000 V rms	1,000 V rms

Dielectric strength (altitude, mounted in mating socket)

	80,000 ft
Coil to case	500 V rms
Aux contacts	
All other points	500 V rms

Max contact drop initial	0.150 volt
After life test	0.175 volt
Overload current	20 amperes
Rupture current	25 amperes
Duty rating	Continuous
RFI specification	MIL-STD-461

(Applicable to coil circuits of ac operated relays)

TITLE: RELAYS, ELECTROMAGNETIC, 6PDT, 5 AMPERES, TYPE J, SOCKET MOUNTED, HERMETICALLY SEALED

SUPERSEDES:

P.A: AF - 85; Other Cust: Navy - AS

Procurement Specification: MIL-R-6106

DD FORM 1 MAY 73 672 (Coordinated) previous editions of this form are obsolete

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - EC, Navy - , Air Force - 11, 99

User activities: Army - , Navy - , Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.