INCH-POUND
MS27406E
w/AMENDMENT 2
20 March 2017
SUPERSEDING
MS27406E
w/AMENDMENT 1
26 January 2012

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-3950.

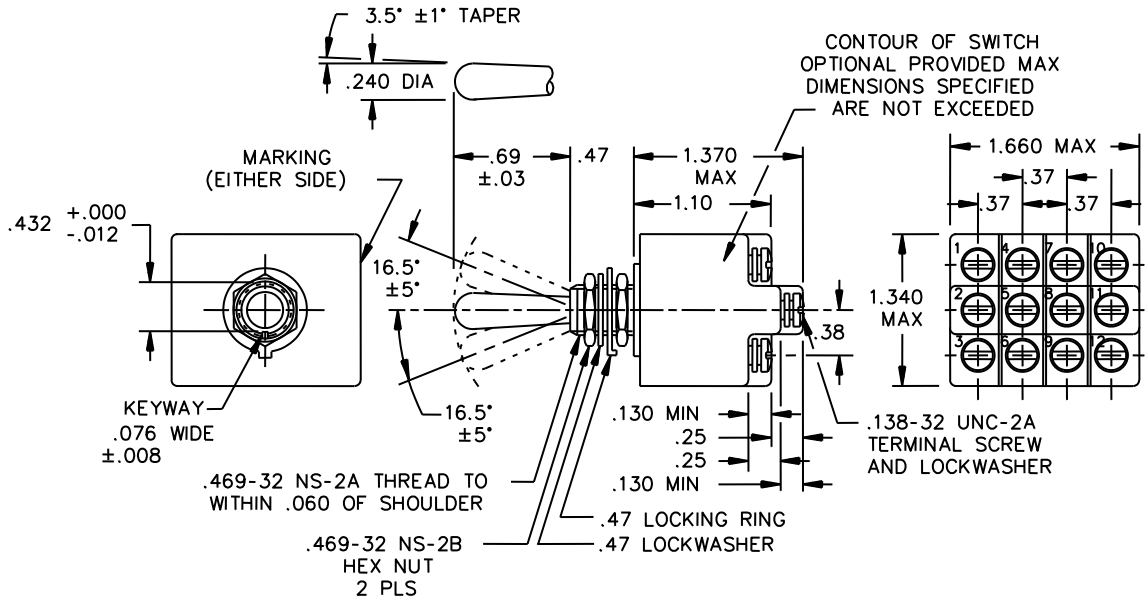


FIGURE1. Dimensions and configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:23Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.37	9.4
.008	0.20	.38	9.7
.012	0.30	.432	10.97
.020	0.51	.47	11.9
.03	0.8	.69	17.5
.060	1.52	1.10	27.9
.076	1.93	1.340	34.04
.130	3.30	1.370	34.80
.240	6.10	1.660	42.16
.25	6.4		

NOTES:
1. Dimensions are inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .020 (0.51 mm) for two place decimals and ± .005 (0.13 mm) for three place decimals.
4. For hardware and terminal screw detail specifications, see appendix of MIL-DTL-3950.
5. In event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.

FIGURE1. Dimensions and configuration Continued

REQUIREMENTS

All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever

Maximum weight is .20 pound.

Electrical rating: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:23Z
Check the source to verify that this is the current version before use.

TABLE I Detail Requirements.

MS part number	Circuit with toggle lever in			Current capacity (amperes) 28 volts DC			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS27406-1	1-2 4-5 7-8 On 10-11	2-3 4-5 7-8 On 11-12	2-3 5-6 8-9 On 11-12	5	20	12	4	15	15
MS27406-2	1-2 Mom. 4-5 7-8 On 10-11	2-3 4-5 7-8 On 11-12	2-3 5-6 8-9 On 11-12	4	18	10	2	11	8
MS27406-3	1-2 Mom. 4-5 7-8 On 10-11	2-3 4-5 7-8 On 11-12	2-3 Mom. 5-6 8-9 On 11-12						

Referenced documents
MIL-DTL-3950

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity
DLA – CC

(Project 5930-2017-027)

Review activities
Army – AR, AV, CR4, MI
Navy – EC
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:23Z
Check the source to verify that this is the current version before use.