



FED. SUP CLASS
4730

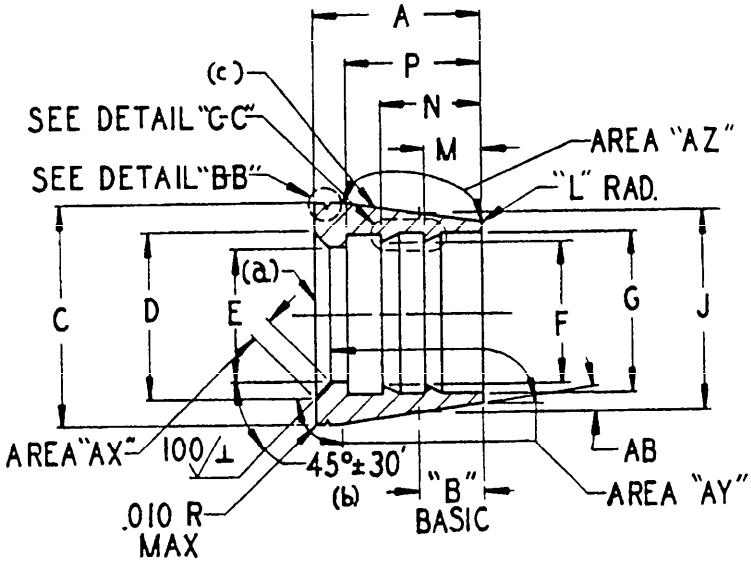




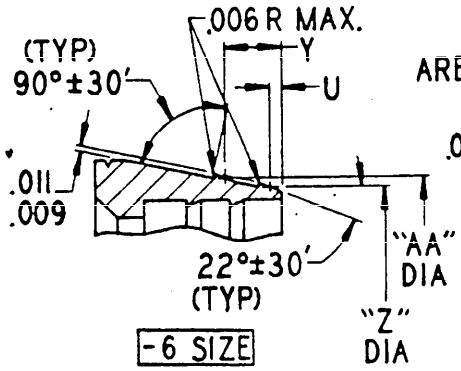

-6 SIZE

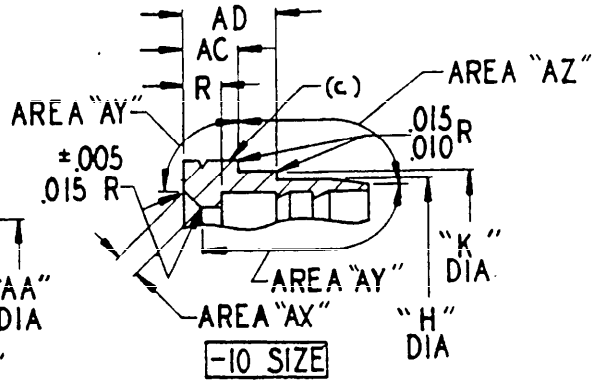


-10 SIZE

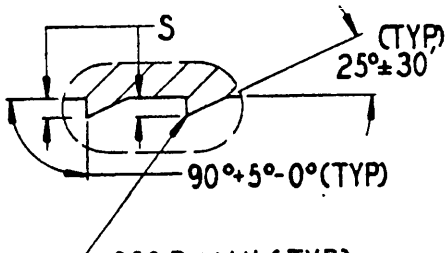

DETAIL "C-C"

-4 THRU -10 SIZE

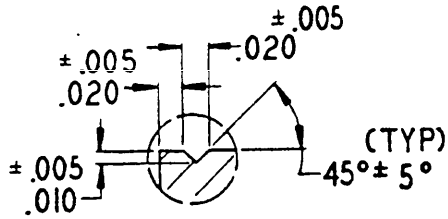

DETAIL "B-B"

-4 THRU -10 SIZE

APPROVED 17 Mar 71 REVISED (A) 30 Apr 82

NOTE: THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P. A. USAF-11 Other Cust	INTERNATIONAL INTEREST	TITLE SLEEVE, HOSE COUPLING	MILITARY STANDARD MS 27623 (USAF)
PROCUREMENT SPECIFICATION MIL-F-83296	SUPERSEDES:		SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project No. 4730-F429

(a) HARDNESS TO BE TESTED ON THIS SURFACE.
(b) MUST BE FREE FROM LONGITUDINAL SCRATCHES NICKS OR TOOL MARKS.
(c) MS PART NO. AND MANUFACTURER'S TRADEMARK HERE

MATERIAL CORROSION RESISTING STEEL (17-4PH) PER SPECIFICATION AMS 5643. HARDNESS SHALL BE ROCKWELL "C" 35 TO 39 OR 30N-55.5 TO 58.5.

FINISH: PASSIVATE PER PROCUREMENT SPECIFICATION

DRY-FILM LUBRICATE IN AREA "AX" PER MIL-L-8937. DRY-FILM IN AREA "AY" SHALL NOT BE CAUSE FOR REJECTION. NO DRY-FILM ALLOWED IN AREA "AZ".

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED: RADIUS OR BREAK ALL CORNERS .005 + .005/.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSIB46.1 - 1962 NOT TO EXCEED 125 AA. ALL DIAMETERS MUST BE CONCENTRIC WITHIN .005 TIR.

THIS PART FOR USE WITH MIL-H-83298 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

NEXT ASSEMBLY MS27616 THRU MS27618 AND MS27629 THRU MS27631

MS PART NUMBER	A ±.005	B	C ±.005	D ±.005	E ±.005	F +.004 -.000	G ±.005	H +.000 -.005	J ±.003	K +.000 -.005	L ±.005
MS27623-4C	.375	.1672	.490	.378	.265	.326	.361		.440		
MS27623-6C	.410	.2442	.625	.450	.353	.412 (A)	.446		.584		
MS27623-8C	.567	.2597	.735	.560	.460	.512	.546		.663		
MS27623-10C	.655	.0622	.870	.700	.597	.647	.685	.760	.740	.800	.012

M ±.005	N ±.005	P ±.005	R ±.005	S ±.002	U	Y	Z ±.003	AA ±.003	AB		AC ±.005	AD ±.005
.085	.185	.275		.016					10°	±15'		
.100	.225	.300		.016 (A)	.0267	.1245	.502	.543	12°			
.260	.360	.460		.016					8°	±30'		
.222	.347		.104								.193	.308

NOTE: THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF

APPROVED 17 Mar 71 REVISED (A) 30 Apr 82

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P. A. USAF-11 Other Cust	INTERNATIONAL INTEREST	TITLE SLEEVE, HOSE COUPLING	MILITARY STANDARD MS 27623 (USAF)
PROCUREMENT SPECIFICATION MIL-F-83296	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (LIMITED COORDINATION)

Source: https://assist.dla.mil -- Downloaded: 20240-23116:452
Check the source to verify that this is the current version before use.