INCH-POUND

MS27656E
w/AMENDMENT 1
27 June 2025
SUPERSEDING
MS27656E
2 February 2012

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, BACK PANEL, WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.


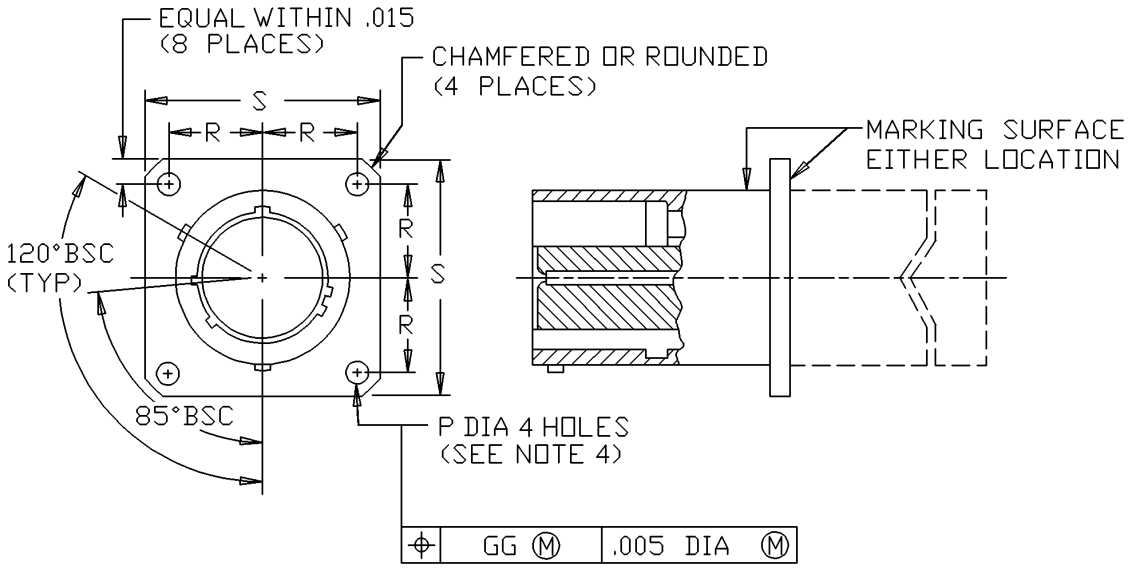


FIGURE 1. Receptacle, classes E, T and P.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

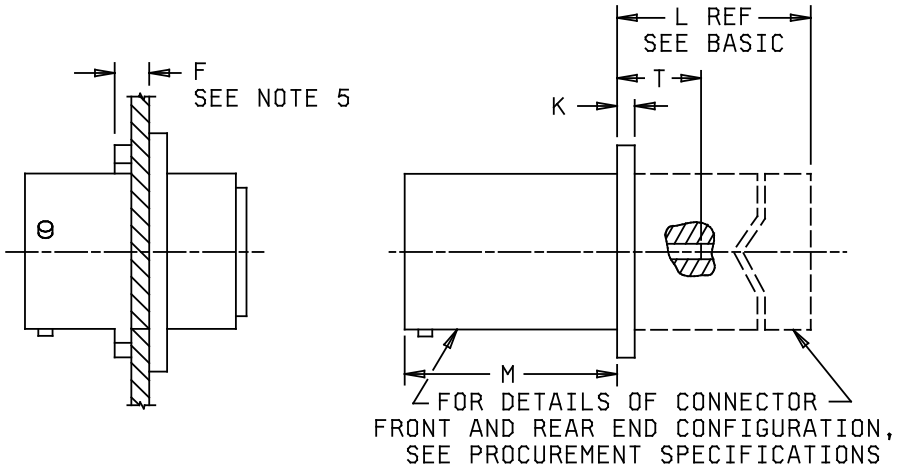

Shell size	F max	K +.015 -.000	L (class E) max see basic	L (class P) max see basic	L (class T) max see basic	M +.000 -.005	P dia +.010 -.005	R BSC	S ± .020	T max
9	.234	.085	.469	.719	.469	.820	.128	.3595	.938	.156
11								.406	1.031	
13								.453	1.125	
15								.4845	1.219	
17								.531	1.312	
19								.578	1.438	
21	.204	.115	.500	.750	.500	.790	.147	.625	1.562	.188
23								.6875	1.688	
25	.193							.750	1.812	

FIGURE 1. Receptacle, classes E, T and P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.193	4.90	.560	14.22	1.125	27.58
.007	0.18	.204	5.18	.578	14.68	1.219	30.96
.010	0.25	.234	5.94	.625	15.88	1.312	33.32
.015	0.38	.3595	9.13	.6875	17.46	1.438	36.53
.020	0.51	.406	10.31	.719	18.26	1.562	39.67
.085	0.79	.453	11.51	.750	19.05	1.688	42.88
.115	2.92	.469	11.91	.790	20.07	1.812	46.02
.128	3.25	.4845	12.31	.820	20.83		
.156	3.96	.500	12.70	.938	23.83		
.188	4.78	.531	13.49	1.031	26.19		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. The gauge features for GG shall be .010 (0.25 mm) smaller than the MMC size at basic location.
5. Maximum panel thickness including mounting hardware.

FIGURE 1. Receptacle, classes E, T and P - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall be in accordance with MIL-DTL-38999.
Mating connectors: MS27467, MS27653 and MS27661.
Insert arrangements: See MIL-STD-1560.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:



No letter is required for normal.

Specification restrictions

Navy	Army	Air Force
Class E is inactive for new design.	For ground equipment only, class E is inactive for new design.	Classes E and P are inactive for new design.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27467
MS27661
MS27653

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2025-057)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.