

FED. SUP CLASS
5935

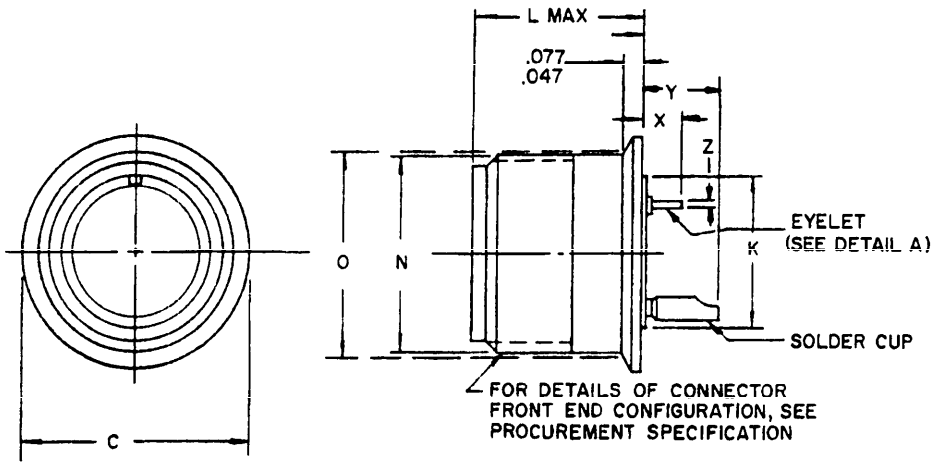



DETAIL A

CONTACT SIZE	X MAX	Y MAX	Z MIN	V MIN	W MAX
16	.219	.375	.020	.065	.115
12	.281	.516	.020	.096	.190
8	--	.719	--	--	--
4	--	.980	--	--	--
0	--	.980	--	--	--

CLASS H - HERMETIC SEAL

CLASS H CONNECTORS WITH ELECTROLESS NICKEL FINISH INACTIVE FOR DESIGN AFTER 25 APRIL 1974.

NOTES:
1. Dimensions in inches. Unless otherwise specified, tolerances; decimals ±.016.
2. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
3. MIL-C-5015 front and rear release crimp contact connectors and solder contact connectors are intermateable.
4. (D) For insert arrangements see MIL-STD-1651.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.

(D) Denotes changes

APPROVED 18 Oct 71 REVISED (A) 18 Feb 72 (B) 31 Oct 72 (C) 25 Apr 74 (D) 23 Jan 1978

User activities:

Review activities:
NAVY - EC

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

P.A AS	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SOLDER MOUNTING, SOLDER CONTACT HERMETIC, AN TYPE	MILITARY STANDARD
Other Cust			MS3143(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 5935-N073

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:59Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	C ±.010	K ±.010	L MAX. SIZE 20,16,12 & 8 CONT.	L MAX. SIZE 4 & 0 CONT.	N +.000 -.062	O REF. MTG. HOLE
8S	.750	.428	.730		.532	.562
10S	.875	.490	.730		.656	.688
10SL	.875	.490	.730		.656	.688
12S	1.000	.646	.730		.782	.812
12	1.000	.646	.915		.782	.812
14S	1.125	.709	.730		.906	.938
14	1.125	.709	.915		.906	.938
16S	1.250	.834	.730	1.040	1.032	1.062
16	1.250	.834	.915		1.032	1.062
18	1.375	.959			1.156	1.188
20	1.500	1.146			1.282	1.312
22	1.625	1.240			1.406	1.438
24	1.750	1.365			1.532	1.562
28	2.000	1.615			1.782	1.812
32	2.250	1.865			2.032	2.062
36	2.500	2.115			2.282	2.500
40	2.750	2.365			2.532	2.750
44	3.000	2.615			2.782	3.000
48	3.250	2.865	.915	1.040	3.032	3.250

(D)

EXAMPLE OF PART NO. MS3143H 18C5PX

MS3143 H 18 C 5 P X

- MS3143 — BASIC PART NO.
- H — CLASS H (D)
- 18 — MATERIAL DESIGNATOR, SHELL SIZE
  - S - STAINLESS STEEL.
  - T - FERROUS ALLOY WITH ELECTRICALLY CONDUCTIVE FUSED TIN.
  - THE FOLLOWING IS INACTIVE FOR DESIGN:
  - LEAVE BLANK FOR FERROUS ALLOY WITH ELECTROLESS NICKEL FINISH.
- C — TERMINATION TYPE
  - C - SOLDER CUP
  - Y - EYELET
- 5 — INSERT ARRANGEMENT
- P — CONTACT DESIGNATOR
- X — ALTERNATE INSERT POSITION W,X,Y, OR Z. LEAVE BLANK FOR NORMAL POSITION

REVISED (D) For changes see pages 1 and 2

APPROVED 18 Oct 71

User activities:

Review activities:
NAVY - EC

This military standard is approved for use by Naval Air Systems Command , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A AS Other Cust	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SOLDER MOUNTING, SOLDER CONTACT HERMETIC, AN TYPE	MILITARY STANDARD MS3143(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:59Z
Check the source to verify that this is the current version before use.