
FED SUP CLASS
5935



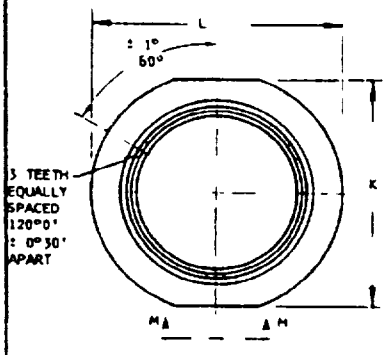

VIEW MM




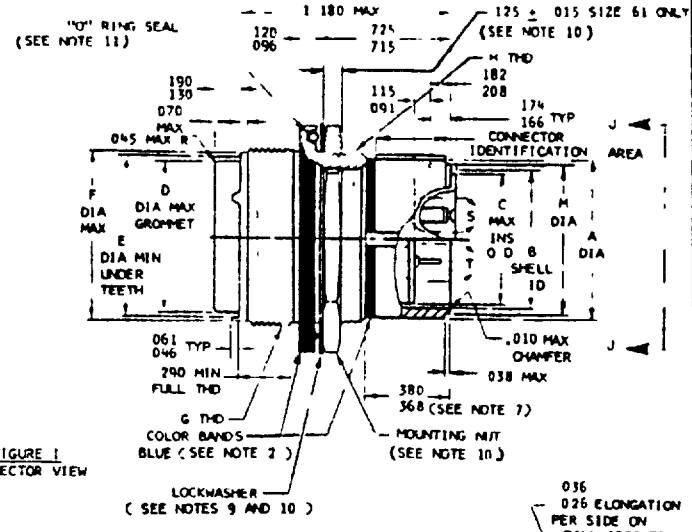


FIGURE I
CONNECTOR VIEW

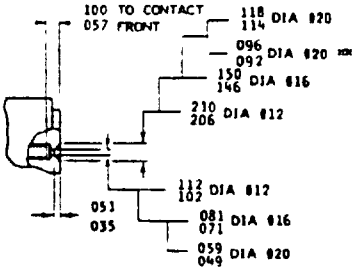


DETAIL S

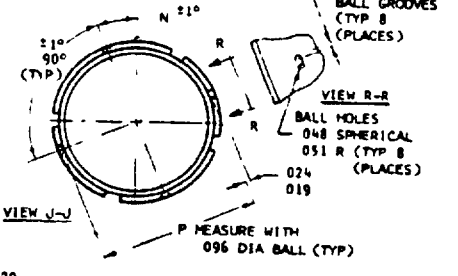



DETAIL T



PANEL CUTOUT

***ON OUTER ROW CONTACTS OF INSERT ARRANGEMENTS INDICATED IN CHART

PART NUMBER

EXAMPLE MS3464 E 19 - 50 P B

- MS NUMBER
- CLASS
- SHELL SIZE
- INSERT ARRANGEMENT
- CONTACT STYLE
- ALTERNATE INSERT POSITION

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR SOCKET CONTACT CHAMFER LEAD-INS AND PIN CONTACT RAISED SEAL BARRIERS

SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12-50	5, 6, 8, 9, 11 AND 12

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply it if standard where suitable.

P A NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS 3464(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 4

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-N668-9

(Limited Coordination)
Source: https://assist.dla.mil -- Downloaded: 202610-23T13:06Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935


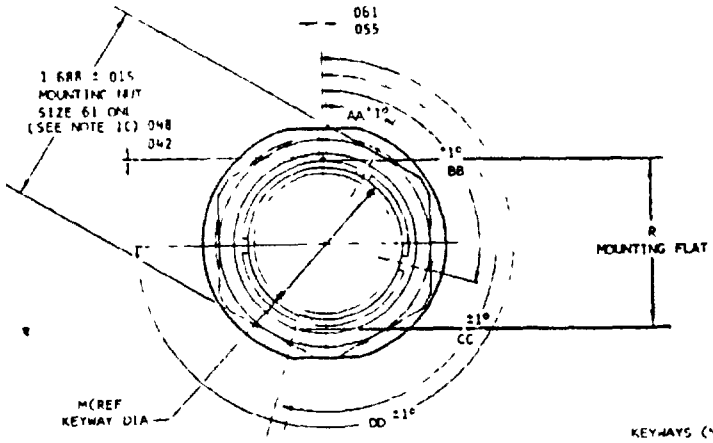



FIGURE II
KEYWAY POSITIONS



ASSEMBLED TO STRAIGHT BACKSHELL
LESS STRAIN RELIEF
(SEE NOTE 3)



ASSEMBLED TO STRAIGHT BACKSHELL
WITH STRAIN RELIEF
(SEE NOTE 3)



ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF
(SEE NOTE 3)

FIGURE III
BACKSHELL ACCESSORIES




FIGURE IV
PANEL DIMENSIONS

APPROVED 21 July 1971 REVISED

P A NAVY-AS Other Cust	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS3464(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 2

DD FORM 0 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

This standard has been approved by the Department of the NAVY and is mandatory for use by the NAVY activities. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:06Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

TABLE I

CONNECTOR DIMENSIONS AND WEIGHTS

SHELL SIZE	A	B	C	D	E	F	G THREAD	H THREAD	K	L	N
3	.441/ .431	.367/ .356	.330	.351	.441	.509	9/16-24 UNEF-2A	9/16-24 UNEF-2A	.765/ .735	.765/ .735	30°
7	.576/.566	.483/.473	.451	.531	.613	.687	1/4-20 UNEF-2A	11/16-24 UNEF-2A	.890/ .860	.890/ .860	22°30'
12	.710/ .700	.624/ .614	.553	.665	.731	.812	7/8-20 UNEF-2A	13/16-20 UNEF-2A	1.077/1.047	1.077/1.047	22°30'
19	.849/ .839	.763/ .753	.738	.790	.861	.937	1-20 UNEF-2A	1-20 UNEF-2A	1.171/1.141	1.202/1.172	22°30'
27	1.004/ .994	.918/.908	.854	.869	.919	.992	1 1/16-18 UNEF-2A	1 1/8-18 UNEF-2A	1.327/1.297	1.327/1.297	22°30'
37	1.126/1.116	1.040/1.030	.978	.994	1.044	1.117	1 3/16-18 UNEF-2A	1 1/4-18 UNEF-2A	1.435/1.405	1.515/1.485	22°30'
61	1.414/1.404	1.316/1.306	1.271	1.280	1.361	1.427	1 1/2-18 UNEF-2A	1 1/2-18 UNEF-2A	1.864/1.834	1.890/1.860	22°30'

SHELL SIZE	P	R	U	V	X	K	Y"	Y	Y'	Y"	Z
3	.398/ .391	.523	.538/ .534	.577/ .567	1.452	1.802	2.009	.750	1.112	1.320	.850
7	.533/ .526	.655	.665/ .661	.701/ .691	1.452	1.802	2.210	.750	1.112	1.521	.950
12	.668/ .661	.776	.788/ .784	.826/ .816	1.452	2.037	2.300	.750	1.347	1.611	1.010
19	.806/ .799	.963	.973/ .969	1.013/1.003	1.452	2.037	2.435	.750	1.347	1.746	1.070
27	.961/ .954	1.089	1.099/1.095	1.138/1.128	1.452	2.037	2.534	.750	1.347	1.845	1.130
37	1.083/1.076	1.214	1.224/1.220	1.263/1.253	1.452	2.037	2.667	.750	1.347	1.978	1.190
61	1.367/1.360	1.463	1.471/1.467	1.514/1.504	1.452	2.037	2.914	.750	1.347	2.220	1.335

SHELL SIZE	WEIGHT MAX (LBS) PIN INSERT	WEIGHT MAX (LBS) SOC INSERT	M
3	WEIGHTS WILL BE SUPPLIED IN LATER REVISION		.392/.385
7			.527/ .520
12			.661/ .654
19			.800/ .793
27			.955/ .948
37			1.077/1.070
61			1.365/1.358

#WEIGHT LISTED IS FOR CONNECTOR WITH MAX DENSITY INSERT ARRANGEMENT LESS CONTACTS AND BACKSHELL ACCESSORIES

TABLE II

KEYWAY POSITIONS

SIZE	AA	BB	CC	DD
3	23°	97°	187°	--
7	23°	97°	187°	277°
12	30°	105°	195°	270°
19	30°	105°	195°	270°
27	30°	105°	195°	270°
37	30°	105°	195°	270°
61	30°	105°	195°	270°

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and its mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

P A NAVY-AS	International interest	TITLE	MILITARY STANDARD
Other Cust		CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MS 3464(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 3


DD FORM 10 APR 64 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:06Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

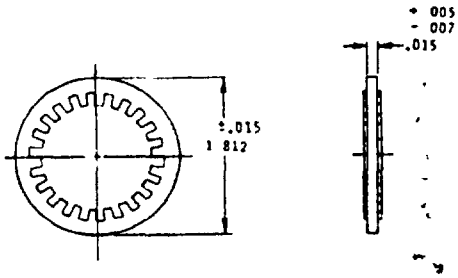

LOCKWASHER
FOR SIZE 61 ONLY
(SEE NOTES 9 & 10)

NOTES

1 THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTOR DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF MIL-C-81703
2 COLOR BAND .100 WIDE MAX BAND LOCATION MUST BE SUCH THAT IT IS VISIBLE WHEN THE CONNECTOR IS MOUNTED
3 CONNECTOR ASSEMBLY MUST INCLUDE A BACKSHELL TO MEET THE MOISTURE SEALING REQUIREMENTS OF THE PROCUREMENT DOCUMENT SEE MS 3416, MS 3417 AND MS 3418 FOR APPLICABLE BACKSHELL ACCESSORIES
NUMBER CROSS REFERENCE
4 MATERIALS SHELLS 6061-T6 PER QQ-A-367,
5 THE FINISH ON THE SHELLS SHALL BE ELECTROLESS NICKEL
6 DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE XX ± .010 AND XXX ± .005, ANGULAR TOLERANCE, X° ±1°-0°' AND X°X' ±30'
7 .380/.368 DIM CONTROLS BOTH LENGTH OF KEYWAY AND START OF ANGLE FROM "A" DIA
8 DIAMETERS SHOWN ARE AT BASE OF BARRIERS
9 LOCKWASHER OR OTHER SUITABLE MEANS SHALL BE USED TO ASSURE NUT ASSEMBLY
10 MOUNTING NUT & LOCKWASHER FOR SIZES 3 THRU 37 ARE THE SAME AS MS3134E- EXCEPT PARTS SHALL BE ELECTROLESS NICKEL PLATED SIZE 61 SHALL BE AS SPECIFIED ON SHEETS 1, 2 & 4 OF THIS DRAWING
11 O-RING FOR SHELL SIZES 3 THRU 37 SHALL BE PER MS3134, SHEET 3 O-RING FOR SHELL SIZE 61 SHALL BE MS-29513-130

APPROVED 21 July 1971 REVISED

P A NAVY AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, JAM NUT MOUNTING PUSH-PULL COUPLING, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS 3464(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 4

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

This standard has been approved by the Department of the NAVY, and is mandatory for use by that activity. All other military activities are required to comply with this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:06Z
Check the source to verify that this is the current version before use.