



FED. SUP CLASS
2320

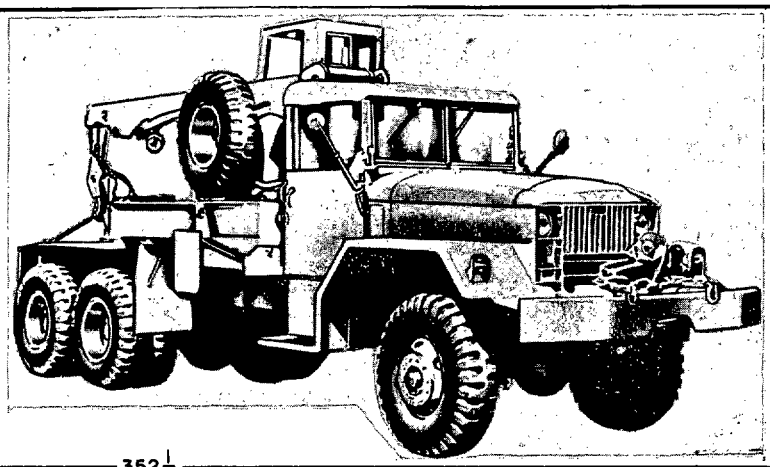

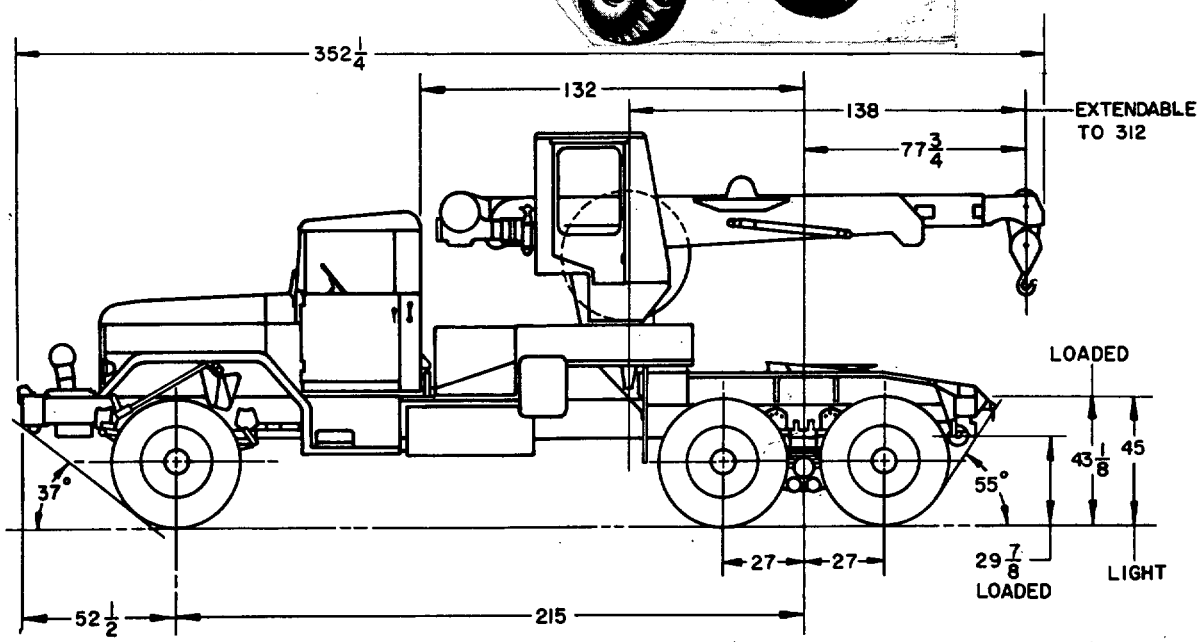

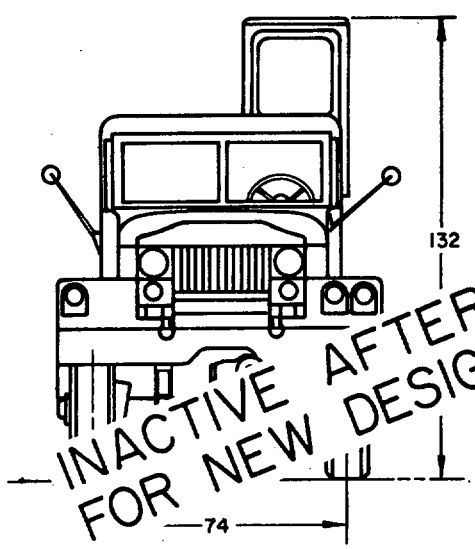

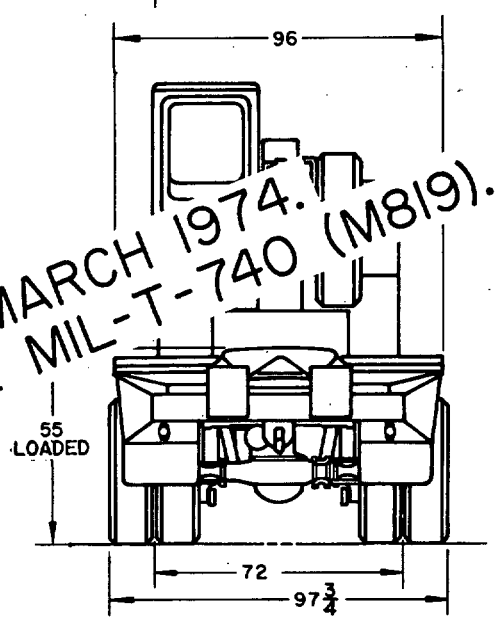

INACTIVE AFTER 27 MARCH 1974. FOR NEW DESIGN USE MIL-T-740 (M819).

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

(B) DENOTES CHANGES

MS PART NO.	REFERENCED DRAWING
MS 500041-1	8358639

APPROVED 11 APRIL 1966 REVISED (A) 27 MARCH 1974 (B) 23 JANUARY 1981

REVIEW ACTIVITIES:

USER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. ARMY-AT Other Cust AF- 99	TITLE TRUCK TRACTOR, WRECKER, 5 TON, 6X6, M246	MILITARY STANDARD MS 500041
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

MODEL: M246 CHASSIS: M63C

CHASSIS: P/N 8358814 W/W MS51397-1

CURB WEIGHT: FULLY EQUIPPED, LESS PAYLOAD AND PERSONNEL.

	W/WINCH
FRONT AXLE	12785
REAR AXLE	20045
TOTAL	32830 LBS.

GROSS WEIGHT: FULLY EQUIPPED, PLUS PAYLOAD AND PERSONNEL.

	W/WINCH
FRONT AXLE	13026
INTER AXLE	18077
REAR AXLE	18077
TOTAL	49180 LBS.

PAYLOAD: AT FIFTH WHEEL

LIMITED CROSS COUNTRY	12000 LBS.
HIGHWAY	16000 LBS.

TOWED LOAD ALLOWANCE:

LIMITED CROSS COUNTRY	37500 LBS.
HIGHWAY	46000 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY)

SHIPPING DIMENSIONS:

	W/WINCH
CU. FT.	2628
SQ. FT.	239

CAB ASSEMBLY: INST'N. DWG. NO. 10883228

FIFTH WHEEL ASSEMBLY: P/N, MS53033

(B) GENERAL: THE M246 TRUCK, TRACTOR, WRECKER, MOUNTED ON THE M63C CHASSIS, IS EQUIPPED WITH A HYDRAULIC POWERED, 3 POSITION, EXTENDABLE BOOM MOUNTED ON THE REAR OF THE VEHICLE. IT IS CAPABLE OF 360° ROTATION AND APPROXIMATELY 45° ELEVATION. THE VEHICLE IS INTENDED FOR GENERAL USE BY THE ARMED FORCES IN TRANSPORTING AND TOWING WRECKED VEHICLES, OR IN PROVIDING FOR SPECIAL TASKS DURING TACTICAL MILITARY OPERATIONS.

MIRROR ASSY.	10938274
TRUCK FRONT END INSTL.	10871373
STEERING INSTL.	8758369
BATTERY BOX, RUNNINGBOARD AND SPLASH PANEL INSTL.	10883368
INSTRUMENT PANEL INSTL.	10883326
TACHOMETER INSTL.	10883225
SPEEDOMETER INSTL.	10883599
AIR CLEANER INSTL.	10883249
PROPELLER SHAFT INSTL.	10883532

CRANE:
- SWING: 360° LIMITED TO 270° BY STOPS
- MAX. BOOM ELEVATION: 45°
- BOOM LENGTH RETRACTED: 11 FT. 6 IN.
- BOOM LENGTH EXTENDED: 26 FT.
- LIFT CAPACITY: 20000 LBS. AT 15 FT. RADIUS WITH BOOM JACKS TO GROUND, REAR OUTRIGGERS UP AND A 3 PART LINE.
- LIFT AND SWING CAPACITY: 10000 LBS. AT 11-1/2 FT. RADIUS WITH OUTRIGGERS IN PLACE.

(B)	POWER PLANT: INSTL.	10883220
(B)	FUEL SYSTEM: INSTL.	10871430
(B)	EXHAUST SYSTEM: INSTL.	10883124

(B)	CLUTCH:	
	CLUTCH ASSEMBLY	8675958
	CLUTCH-DRIVEN MEMBER, ASSY.	8735503
	PRESSURE PLATE ASSY.	8735507
(B)	TRANSMISSION ASSEMBLY:	8333627
	TYPE: SYNCHROMESH	
	NO. OF SPEEDS: 5 FWD; 1 REVERSE	
	FORWARD RATIOS: 7.31, 4.09, 2.41, 1.44, 1.00	
	REVERSE RATIOS: 7.33	
(B)	TRANSFER TRANSMISSION:	
	W/WINCH	10899367-2
	WO/WINCH	10899367
	TRANSFER CASE	10938322
(B)	FRONT SUSPENSION: INSTL.	108712561-1
	FRONT AXLE	7346805
	FRONT SPRINGS	7411110
	SHOCK ABSORBERS	7409617
(B)	REAR SUSPENSION: INSTL.	10871257
	REAR AXLE	8327216
	REAR SPRINGS	8327139
	TORQUE ROD ASSY.	8728126
(B)	FRAME ASSEMBLY:	10871095
	FRONT BUMPER AND LIFTING SHACKLES	10883120
	REAR BUMPER AND LIFTING SHACKLES	10883139

WHEELS:
- TEN AND ONE SPARE
- SIZE: 20 x 7.5, MS53044-6

TIRES:
- TEN AND ONE SPARE
- (B) SIZE: 12.00 x 20, 14 PLY, MIL-T-12459
- TREAD DESIGN: NDCC
- TUBES: MS35392-16

BRAKES: SERVICE
- SIZE: 16-1/2 x 5-1/2
- ACTUATION: AIR/ HYDRAULIC

ELECTRICAL SYSTEM:
- POTENTIAL: 24 VOLTS
- BATTERIES: 2, 6 TN, MS35000-3 OR 4
- STOPLIGHT, TAIL, 2, MS51329-1
- STOPLIGHT, B.O., 1, MS51302-1

PERFORMANCE:
- MAX. SPEED, 53 MPH
- CRUISING RANGE, 229 MILES, LOADED AT 30 MPH

WINCH: MS51353-1

PINTLE: MS51117-1

FORDING KIT: P/N 5701844
- FORDING DEPTH W/O KIT: 30 INCHES
- FORDING DEPTH W/KIT: 78 INCHES

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN).

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS).

(B) THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM:

US ARMY TANK-AUTOMOTIVE MATERIEL READINESS COMMAND
ATTN: DRSTA-GSS
WARREN, MICHIGAN 48090

APPROVED 11 APRIL 1966 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P. A. / Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		TRUCK TRACTOR, WRECKER, 5 TON, 6X6, M246	MS500041
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.