


FED. SUP CLASS
2320

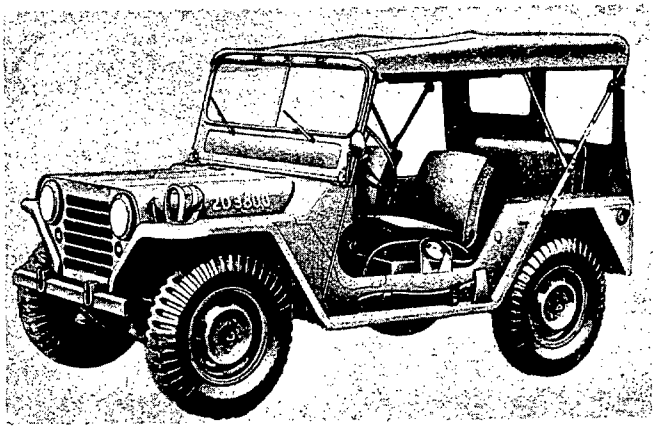

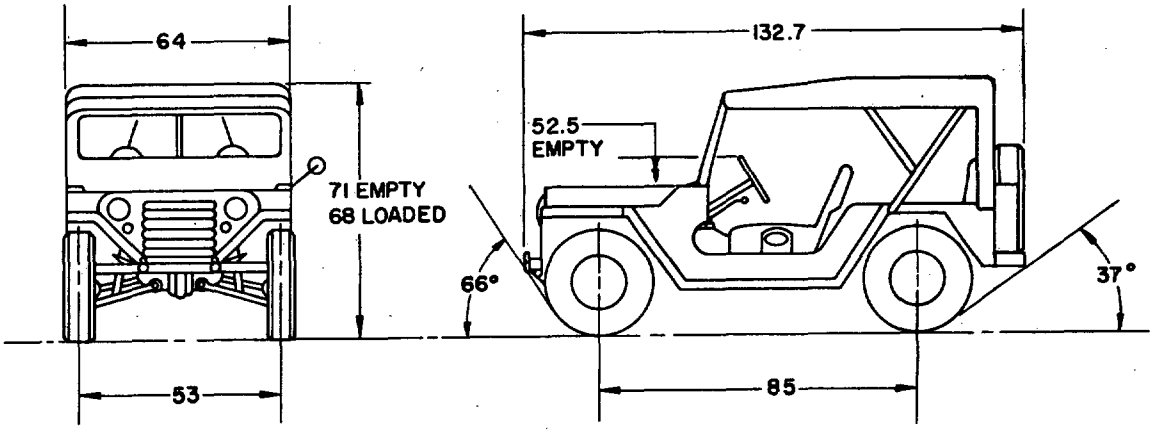

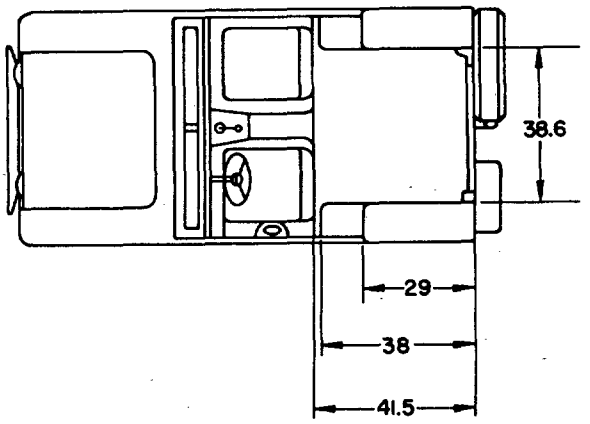

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 2805-A (EDITION 3). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(A) DENOTES CHANGES

(A)

MS PART NO.	DRAWING NO.
MS 500071 -1	8736678

P.A.	International Interest	TITLE
ARMY-AT Other Cust NAVY-MC AF-99		TRUCK, UTILITY, 1/4 TON, 4X4, 85 INCH WHEELBASE, MILITARY DESIGN, M151A1
PROCUREMENT SPECIFICATION MIL-T-45331		SUPERSEDES:

MILITARY STANDARD
MS 500071
SHEET 1 OF 2

2320-1027

DD FORM 1 SEP 87 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEW ACTIVITIES:
USER ACTIVITIES: ARMY , ME; NAVY-YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 9 NOVEMBER 1966 REVISED (A) 22 March 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

FED. SUP CLASS 2320

CURB WEIGHT: 2400 LBS
PAYLOAD, CROSS COUNTRY 800 LBS
PAYLOAD, HIGHWAY 1200 LBS

	EMPTY	CROSS COUNTRY	HIGHWAY
FRONT AXLE	1340	1515	1550
REAR AXLE	1060	1685	2050
TOTAL	2400 LBS	3200 LBS	3600 LBS

MAXIMUM TOWED LOAD:
CROSS COUNTRY 1070 LBS (A)
HIGHWAY 1320 LBS
EMPTY, 350 CU FT REDUCED TO 260 CU FT
SHIPPING WEIGHT, DRY, 2300 LBS

MINIMUM TURNING RADIUS: WITHOUT WINCH
OVER BUMPER, 18 FT 6 1/4 IN.

* **FORDING DEPTH:**
WITH KIT 60 IN.
WITHOUT KIT 21 IN.

POWER PLANT ASSY: INSTL 10884992
ENGINE, COMPLETE 8754411
FOUR CYLINDERS IN LINE
DISPLACEMENT, 141.5 CU IN., BORE 3.875
STROKE 3.00, COMPRESSION RATIO 7.5 TO 1
MAX GROSS HP 71, NET 61 @ 3600 RPM
MAX GROSS TORQUE 128, NET 119 LB FT @ 1800 RPM

RADIATOR AND CONNECTIONS ASSY: 10921887
COOLING SYSTEM CAPACITY, 8.5 QTS
PUMP DRIVE, TWO V BELTS 7033756
FAN ENGINE COOLING, FOUR BLADE 8342323

ELECTRICAL SYSTEM, ENGINE: INSTL 8754602

FUEL SYSTEM: INSTL 8754605

EXHAUST SYSTEM: INSTL 8754719

CLUTCH: 8712372
CLUTCH DISC ASSY 10913204
PRESSURE PLATE ASSY, CLUTCH 8328265
BRAKE AND CLUTCH PEDAL ASSY, INSTL 8754747

TRANSMISSION AND TRANSFER ASSY: 7536199
TYPE, SYNCHROMESH
FORWARD SPEEDS: FOUR, REVERSE: ONE
FORWARD GEAR RATIOS: 1ST: 5.112, 2ND: 3.179
3RD: 1.674, 4TH: 1:1
REVERSE GEAR RATIO, 7.497:1

TRANSFER TRANSMISSION CASE: 10885542
GEAR RATIO, HIGH: 1:1, REVERSE: 1:1

FRONT SUSPENSION ASSY: 8754956
FRONT AXLE, RATIO: 4.86:1 7536140
FRONT SPRINGS, COIL TYPE 8754263
SHOCK ABSORBERS 7331161

REAR SUSPENSION: INSTL 8754708
REAR AXLE, RATIO: 4.86:1 7536140
REAR SPRINGS, COIL TYPE 8754445
SHOCK ABSORBERS, TWO 8359993

FRAME: UNIT WITH BODY REF 8754459
SIDE RAIL, 7.875 X 1.75 X .06 IN. 7345054
REAR CROSS MEMBER 8754715
FRONT BUMPER AND LIFTING HOOK 8754711
REAR BUMPERETTES AND LIFTING HOOK

TIE DOWNS: FOUR
LOCATION, 2 FRONT, 2 REAR

WHEELS: 10921860
SIZE, 16 X 4 1/2, 2 3/8 OFFSET

TIRES: 4 PLY, 6 PLY RATING
SIZE, 700 X 16 LW, TREAD: NDCC (A)

BODY ASSY: 8754459
FOLDING TOP INSTL 8754750
TIRE CARRIER INSTL 8754713
HOOD PANEL ASSY INSTL 8754718
STEERING GEAR INSTL 8754742
WINDSHIELD PANEL ASSY INSTL 8754710
REAR VIEW MIRROR INSTL 8754709
PIONEER EQUIPMENT INSTL 7345050
BRUSH GUARD ASSY 10885028
SPEEDOMETER ASSY 7760396
THROTTLE LINKAGE INSTL 8754716

DRIVE LINES: INSTL 8754743

HAND BRAKE LEVER ASSY: 10950843

PINTLE: INSTL 8754736
PINTLE HOOK MS 51335-2

AIR AND HYDRAULIC: INSTL 8754746
BRAKE SERVICE: ACTUATION, HYDRAULIC
DRUM SIZE: FRONT, 9 1/8 X 2
REAR, 9 1/8 X 2
BRAKE, PARKING 8754237
DRUM SIZE, 6 IN. DIA X 1 IN.

ELECTRICAL SYSTEM: INSTL 8754603
POTENTIAL, 24 VOLT
STARTING MOTOR 7017647
GENERATOR, 25 AMPS 7045798
BATTERIES: TWO, 12 VOLT-2HN MS 35000
COIL 8712399
REGULATOR 8360020; 8712283
LIGHTING, HEAD LAMPS 8741462
BLACKOUT DRIVING LAMP MS 51318-1
BLACKOUT MARKER LAMPS MS 51303-2
TRAILER COUPLING SOCKET 7345183

REFLECTORS:
RED, THREE MS 35387-1

PERFORMANCE:
FUEL TANK CAPACITY, 17 GALS
CRUISING RANGE, HIGHWAY 300 MILES
MAXIMUM SPEED, HIGHWAY 65 MPH

SUPPLEMENTARY KIT DATA:
DEEP WATER FORDING 7536098
100 AMP ALTERNATOR 10885596
HOT WATER HEATER, -25° F 10950750
WINTERIZATION, -65° F 8712420
HARDTOP 7535927
MACHINE GUN MOUNT 10885124
OVERLOAD SPRING 10921883
106 MM RIFLE MOUNT 8389422
RIFLE MOUNT, M14 8712407
DOOR AND SIDE CURTAIN (A) 10950781

APPROVED 9 NOVEMBER 1966 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/1721

P.A. Other Cust	International Interest	TITLE	MILITARY STANDARD
		TRUCK, UTILITY, 1/4 TON, 4X4, 85 INCH WHEELBASE, MILITARY DESIGN, M151A1	MS 500071
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.