INCH-POUND

MS51517B
17 March 2016
SUPERSEDING
MS51517A
17 January 1979

DETAIL SPECIFICATION SHEET

CROSS, TUBE
37 DEGREE FLARED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 17 August 1999. For new design, use SAE-J514.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

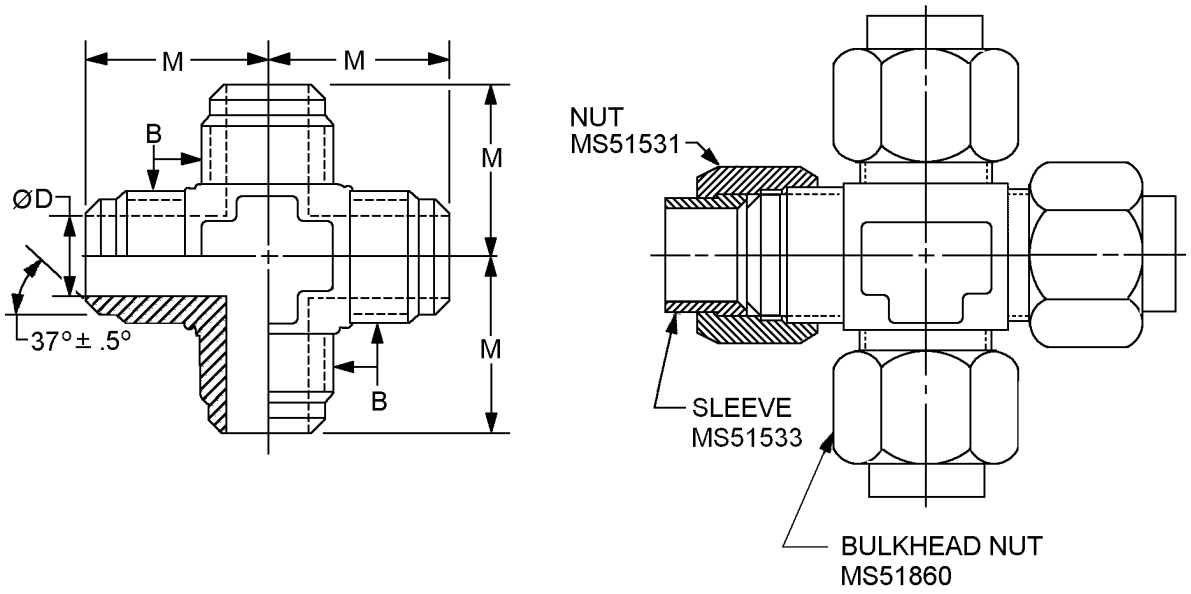


FIGURE 1. Cross tube.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

Suffix designator		Tube OD nom.	B Straight thread
Assembly (see note 4)	Body		
A2	B2	.1250 (3.175)	.3125-24 UNF-2A
A3	B3	.1875 (4.763)	.3750-24 UNF-2A
A4	B4	.2500 (6.350)	.4375-20 UNF-2A
A5	B5	.3125 (7.936)	.5000-20 UNF-2A
A6	B6	.3750 (9.525)	.5625-18 UNF-2A
A8	B8	.5000 (12.700)	.7500-16 UNF-2A
A10	B10	.6250 (15.875)	.8750-14 UNF-2A
A12	B12	.7500 (19.050)	1.0625-12 UN-2A
A14	B14	.8750 (22.225)	1.1875-12 UN-2A
A16	B16	1.0000 (25.400)	1.3125-12 UN-2A
A20	B20	1.2500 (31.750)	1.6250-12 UN-2A
A24	B24	1.5000 (38.100)	1.8750-12 UN-2A
A32	B32	2.0000 (50.800)	2.500-12 UN-2A

Suffix designator		D diameter		M inches (mm) ±.030 (0.76)
Assembly (see note 4)	Body	Basic inches (mm)	Tolerance inches (mm)	
A2	B2	.062 (1.57)	±.003 (0.08)	.770 (19.56)
A3	B3	.125 (3.18)		.830 (21.08)
A4	B4	.172 (4.37)		.890 (22.61)
A5	B5	.234 (5.94)		.950 (24.13)
A6	B6	.297 (7.54)	±.004 (0.10)	1.060 (26.92)
A8	B8	.391 (9.93)		1.250 (31.75)
A10	B10	.484 (12.29)		1.450 (36.83)
A12	B12	.609 (15.47)	±.005 (0.13)	1.660 (42.16)
A14	B14	.718 (18.24)		1.730 (43.94)
A16	B16	.844 (21.44)	±.007 (0.18)	1.810 (45.97)
A20	B20	1.078 (27.38)	+.008 -.005 (+0.20 -0.13)	2.060 (52.32)
A24	B24	1.312 (33.32)		2.330 (59.18)
A32	B32	1.781 (45.24)	+.010 -.005 (+0.25 -.013)	3.060 (77.72)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges and remove all burrs and slivers.
4. Assemblies are only furnished to this specification (body, nuts, and sleeves). Bodies are not to be stocked stored or issued.
5. Dimensions and tolerances not shown shall be in accordance with SAE-J514 for 37° flared fittings.
6. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Cross tube - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Cross tube shall be as specified on figure 1 and in tables I and II.

Components of the assemblies shall be of the same material and finish.

Materials shall be in accordance with MIL-DTL-18866 and table I.

TABLE I. Materials.

Material	Form	Specification	Alloy
Carbon steel	Bar	SAE-J403	1117, 1126, 1140, 1213, 1215, or 12L14
	Forgings		
Chrome-molybdenum steel	Bars	SAE-AMS6370	4130
	Forgings	SAE-AMS6382	
		SAE-AMS6370	
Corrosion resistant steel	Bars and forgings	ASTM A276/A276M	304, 304L, 316, or 321
		ASTM A564/A564M	XM-12 (15-5 PH) UNS S15500 or 630 (17-4 PH) UNS S17400
		SAE-AMS5639	UNS S30400
		SAE-AMS5645	UNS S32100
		SAE-AMS5647	UNS S30403
		SAE-AMS5743	UNS S35500
	Bar	ASTM A582/A582M	UNS S30300
Nickel-copper alloy	Bar	ASTM B164 QQ-N-281	UNS N04400
High-chromium nickel alloy	Bar	ASTM B166	UNS N06690
	Forgings	ASTM B564	
Titanium 1/	Bars	SAE-AMS4928	6AI-4V annealed
	Forgings		

1/ Titanium shall not be used in oxygen or potable water systems.

Finish. Finishes shall be as specified in table II. All platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of corrosion after 96 hours of salt spray. Fluid passages, other openings and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. Material and finish identification codes.

PIN code material/plating finish	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 2 or SAE-AMS-QQ-P-416, type II, class 2. 1/
H	Steel	Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC.
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 3/
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 4. 2/
R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 12. 5/
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 4/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 4/
Z	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 12, or ASTM B695, type II, class 12. 5/
ZC	Steel	Zinc may be any zinc plating from PIN codes H, J, and R with a colored chromate coating 5/

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems.
2/ Hexavalent chromium free. Finish shall be ROHS compliant.
3/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum coating thickness.
4/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to FED-STD-595 colors 36076 through 36293.
5/ Not for use in aircraft. Requires approval from the Program Officer for all applications.


Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using one of the brush plating processes below as appropriate to primary finish. The term “trivalent wrenchability” is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching.

a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE-AMS-2451/5.
b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE-AMS-2451/9.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

PIN: The PIN consists of the letters “MS”, the specification number, a letter and number for cross tube size, and a letter for material finish designator.

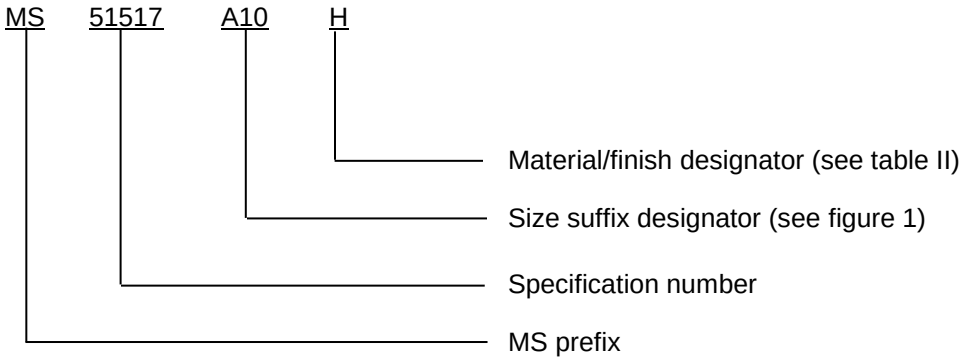

PIN example: MS51517A10H indicates a cross tube, .6250 inch (15.875 mm), steel zinc-aluminum plating.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Table III provides a detailed cross-reference of inactive MS51517 PIN’s and for new design SAE-J514 PIN’s.

MS51517 parts have straight threads in accordance with ASME B1.1 the SAE parts have straight threads in accordance with SAE-J425.

Plating “P” SAE allows a range of nickel from 6% to 20%. Below 12%, ZnNi is not much better than zinc plating, which is less expensive and easier to apply. Above 16%, ZnNi becomes more cathodic and no longer acts as a sacrificial coating - if a high nickel coating is damaged the steel beneath the coating will corrode at an accelerated rate.

Users are cautioned to evaluate replacement parts for their particular application.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51517 to SAE-J514 cross reference.

Inactive for new design MS51517- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51517A2	MS51517B2	1/8	Not available	Not available
MS51517A2H	MS51517B2H	1/8	Not available	Not available
MS51517A2J	MS51517B2K	1/8	Not available	Not available
MS51517A2M	MS51517B2M	1/8	J514-2-2-2-2-070501MA	J514-2-2-2-2-070501MB
MS51517A2N	MS51517B2N	1/8	J514-2-2-2-2-070501NA	J514-2-2-2-2-070501NB
MS51517A2P	MS51517B2P	1/8	J514-2-2-2-2-070501PA	J514-2-2-2-2-070501PB
MS51517A2R	MS51517B2R	1/8	Not available	Not available
MS51517A2S	MS51517B2S	1/8	J514-2-2-2-2-070501SA	J514-2-2-2-2-070501SB
MS51517A2T	MS51517B2T	1/8	J514-2-2-2-2-070501TA	J514-2-2-2-2-070501TB
MS51517A2TF	MS51517B2TF	1/8	Not available	Not available
MS51517A2Z	MS51517B2Z	1/8	J514-2-2-2-2-070501ZA	J514-2-2-2-2-070501ZB
MS51517A2ZC	MS51517B2ZC	1/8	Not available	Not available
MS51517A3	MS51517B3	3/16	Not available	Not available
MS51517A3H	MS51517B3H	3/16	Not available	Not available
MS51517A3J	MS51517B3J	3/16	Not available	Not available
MS51517A3M	MS51517B3M	3/16	J514-3-3-3-3-070501MA	J514-3-3-3-3-070501MB
MS51517A3N	MS51517B3N	3/16	J514-3-3-3-3-070501NA	J514-3-3-3-3-070501NB
MS51517A3P	MS51517B3P	3/16	J514-3-3-3-3-070501PA	J514-3-3-3-3-070501PB
MS51517A3R	MS51517B3R	3/16	Not available	Not available
MS51517A3S	MS51517B3S	3/16	J514-3-3-3-3-070501SA	J514-3-3-3-3-070501SB
MS51517A3T	MS51517B3T	3/16	J514-3-3-3-3-070501TA	J514-3-3-3-3-070501TB
MS51517A3TF	MS51517B3TF	3/16	Not available	Not available
MS51517A3Z	MS51517B3Z	3/16	J514-3-3-3-3-070501ZA	J514-3-3-3-3-070501ZB
MS51517A3ZC	MS51517B3ZC	3/16	Not available	Not available
MS51517A4	MS51517B4	1/4	Not available	Not available
MS51517A4H	MS51517B4H	1/4	Not available	Not available
MS51517A4J	MS51517B4J	1/4	Not available	Not available
MS51517A4M	MS51517B4M	1/4	J514-4-4-4-4-070501MA	J514-4-4-4-4-070501MB
MS51517A4N	MS51517B4N	1/4	J514-4-4-4-4-070501NA	J514-4-4-4-4-070501NB
MS51517A4P	MS51517B4P	1/4	J514-4-4-4-4-070501PA	J514-4-4-4-4-070501PB
MS51517A4R	MS51517B4R	1/4	Not available	Not available
MS51517A4S	MS51517B4S	1/4	J514-4-4-4-4-070501SA	J514-4-4-4-4-070501SB
MS51517A4T	MS51517B4T	1/4	J514-4-4-4-4-070501TA	J514-4-4-4-4-070501TB
MS51517A4TF	MS51517B4TF	1/4	Not available	Not available
MS51517A4Z	MS51517B4Z	1/4	J514-4-4-4-4-070501ZA	J514-4-4-4-4-070501ZB
MS51517A4ZC	MS51517B4ZC	1/4	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51517 to SAE-J514 cross reference - Continued.

Inactive for new design MS51517- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51517A5	MS51517B5	5/16	Not available	Not available
MS51517A5H	MS51517B5H	5/16	Not available	Not available
MS51517A5J	MS51517B5J	5/16	Not available	Not available
MS51517A5M	MS51517B5M	5/16	J514-5-5-5-5-070501MA	J514-5-5-5-5-070501MB
MS51517A5N	MS51517B5N	5/16	J514-5-5-5-5-070501NA	J514-5-5-5-5-070501NB
MS51517A5P	MS51517B5P	5/16	J514-5-5-5-5-070501PA	J514-5-5-5-5-070501PB
MS51517A5R	MS51517B5R	5/16	Not available	Not available
MS51517A5S	MS51517B5S	5/16	J514-5-5-5-5-070501SA	J514-5-5-5-5-070501SB
MS51517A5T	MS51517B5T	5/16	J514-5-5-5-5-070501TA	J514-5-5-5-5-070501TB
MS51517A5TF	MS51517B5TF	5/16	Not available	Not available
MS51517A5Z	MS51517B5Z	5/16	J514-5-5-5-5-070501ZA	J514-5-5-5-5-070501ZB
MS51517A5ZC	MS51517B5ZC	5/16	Not available	Not available
MS51517A6	MS51517B6	3/8	Not available	Not available
MS51517A6H	MS51517B6H	3/8	Not available	Not available
MS51517A6J	MS51517B6J	3/8	Not available	Not available
MS51517A6M	MS51517B6M	3/8	J514-6-6-6-6-070501MA	J514-6-6-6-6-070501MB
MS51517A6N	MS51517B6N	3/8	J514-6-6-6-6-070501NA	J514-6-6-6-6-070501NB
MS51517A6P	MS51517B6P	3/8	J514-6-6-6-6-070501PA	J514-6-6-6-6-070501PB
MS51517A6R	MS51517B6R	3/8	Not available	Not available
MS51517A6S	MS51517B6S	3/8	J514-6-6-6-6-070501SA	J514-6-6-6-6-070501SB
MS51517A6T	MS51517B6T	3/8	J514-6-6-6-6-070501TA	J514-6-6-6-6-070501TB
MS51517A6TF	MS51517B6TF	3/8	Not available	Not available
MS51517A6Z	MS51517B6Z	3/8	J514-6-6-6-6-070501ZA	J514-6-6-6-6-070501ZB
MS51517A6ZC	MS51517B6ZC	3/8	Not available	Not available
MS51517A8	MS51517B8	1/2	Not available	Not available
MS51517A8H	MS51517B8H	1/2	Not available	Not available
MS51517A8J	MS51517B8J	1/2	Not available	Not available
MS51517A8M	MS51517B8M	1/2	J514-8-8-8-8-070501MA	J514-8-8-8-8-070501MB
MS51517A8N	MS51517B8N	1/2	J514-8-8-8-8-070501NA	J514-8-8-8-8-070501NB
MS51517A8P	MS51517B8P	1/2	J514-8-8-8-8-070501PA	J514-8-8-8-8-070501PB
MS51517A8R	MS51517B8R	1/2	Not available	Not available
MS51517A8S	MS51517B8S	1/2	J514-8-8-8-8-070501SA	J514-8-8-8-8-070501SB
MS51517A8T	MS51517B8T	1/2	J514-8-8-8-8-070501TA	J514-8-8-8-8-070501TB
MS51517A8TF	MS51517B8TF	1/2	Not available	Not available
MS51517A8Z	MS51517B8Z	1/2	J514-8-8-8-8-070501ZA	J514-8-8-8-8-070501ZB
MS51517A8ZC	MS51517B8ZC	1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51517 to SAE-J514 cross reference - Continued.

Inactive for new design MS51517- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51517A10	MS51517B10	5/8	Not available	Not available
MS51517A10H	MS51517B10H	5/8	Not available	Not available
MS51517A10J	MS51517B10J	5/8	Not available	Not available
MS51517A10M	MS51517B10M	5/8	J514-10-10-10-10-070501MA	J514-10-10-10-10-070501MB
MS51517A10N	MS51517B10N	5/8	J514-10-10-10-10-070501NA	J514-10-10-10-10-070501NB
MS51517A10P	MS51517B10P	5/8	J514-10-10-10-10-070501PA	J514-10-10-10-10-070501PB
MS51517A10R	MS51517B10R	5/8	Not available	Not available
MS51517A10S	MS51517B10S	5/8	J514-10-10-10-10-070501SA	J514-10-10-10-10-070501SB
MS51517A10T	MS51517B10T	5/8	J514-10-10-10-10-070501TA	J514-10-10-10-10-070501TB
MS51517A10TF	MS51517B10TF	5/8	Not available	Not available
MS51517A10Z	MS51517B10Z	5/8	J514-10-10-10-10-070501ZA	J514-10-10-10-10-070501ZB
MS51517A10ZC	MS51517B10ZC	5/8	Not available	Not available
MS51517A12	MS51517B12	3/4	Not available	Not available
MS51517A12H	MS51517B12H	3/4	Not available	Not available
MS51517A12J	MS51517B12J	3/4	Not available	Not available
MS51517A12M	MS51517B12M	3/4	J514-12-12-12-12-070501MA	J514-12-12-12-12-070501MB
MS51517A12N	MS51517B12N	3/4	J514-12-12-12-12-070501NA	J514-12-12-12-12-070501NB
MS51517A12P	MS51517B12P	3/4	J514-12-12-12-12-070501PA	J514-12-12-12-12-070501PB
MS51517A12R	MS51517B12R	3/4	Not available	Not available
MS51517A12S	MS51517B12S	3/4	J514-12-12-12-12-070501SA	J514-12-12-12-12-070501SB
MS51517A12T	MS51517B12T	3/4	J514-12-12-12-12-070501TA	J514-12-12-12-12-070501TB
MS51517A12TF	MS51517B12TF	3/4	Not available	Not available
MS51517A12Z	MS51517B12Z	3/4	J514-12-12-12-12-070501ZA	J514-12-12-12-12-070501ZB
MS51517A12ZC	MS51517B12ZC	3/4	Not available	Not available
MS51517A14	MS51517B14	7/8	Not available	Not available
MS51517A14H	MS51517B14H	7/8	Not available	Not available
MS51517A14J	MS51517B14J	7/8	Not available	Not available
MS51517A14M	MS51517B14M	7/8	J514-14-14-14-14-070501MA	J514-14-14-14-14-070501MB
MS51517A14N	MS51517B14N	7/8	J514-14-14-14-14-070501NA	J514-14-14-14-14-070501NB
MS51517A14P	MS51517B14P	7/8	J514-14-14-14-14-070501PA	J514-14-14-14-14-070501PB
MS51517A14R	MS51517B14R	7/8	Not available	Not available
MS51517A14S	MS51517B14S	7/8	J514-14-14-14-14-070501SA	J514-14-14-14-14-070501SB
MS51517A14T	MS51517B14T	7/8	J514-14-14-14-14-070501TA	J514-14-14-14-14-070501TB
MS51517A14TF	MS51517B14TF	7/8	Not available	Not available
MS51517A14Z	MS51517B14Z	7/8	J514-14-14-14-14-070501ZA	J514-14-14-14-14-070501ZB
MS51517A14ZC	MS51517B14ZC	7/8	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51517 to SAE-J514 cross reference - Continued.

Inactive for new design MS51517- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51517A16	MS51517B16	1	Not available	Not available
MS51517A16H	MS51517B16H	1	Not available	Not available
MS51517A16J	MS51517B16J	1	Not available	Not available
MS51517A16M	MS51517B16M	1	J514-16-16-16-16-070501MA	J514-16-16-16-16-070501MB
MS51517A16N	MS51517B16N	1	J514-16-16-16-16-070501NA	J514-16-16-16-16-070501NB
MS51517A16P	MS51517B16P	1	J514-16-16-16-16-070501PA	J514-16-16-16-16-070501PB
MS51517A16R	MS51517B16R	1	Not available	Not available
MS51517A16S	MS51517B16S	1	J514-16-16-16-16-070501SA	J514-16-16-16-16-070501SB
MS51517A16T	MS51517B16T	1	J514-16-16-16-16-070501TA	J514-16-16-16-16-070501TB
MS51517A16TF	MS51517B16TF	1	Not available	Not available
MS51517A16Z	MS51517B16Z	1	J514-16-16-16-16-070501ZA	J514-16-16-16-16-070501ZB
MS51517A16ZC	MS51517B16ZC	1	Not available	Not available
MS51517A20	MS51517B20	1 1/4	Not available	Not available
MS51517A20H	MS51517B20H	1 1/4	Not available	Not available
MS51517A20J	MS51517B20J	1 1/4	Not available	Not available
MS51517A20M	MS51517B20M	1 1/4	J514-20-20-20-20-070501MA	J514-20-20-20-20-070501MB
MS51517A20N	MS51517B20N	1 1/4	J514-20-20-20-20-070501NA	J514-20-20-20-20-070501NB
MS51517A20P	MS51517B20P	1 1/4	J514-20-20-20-20-070501PA	J514-20-20-20-20-070501PB
MS51517A20R	MS51517B20R	1 1/4	Not available	Not available
MS51517A20S	MS51517B20S	1 1/4	J514-20-20-20-20-070501SA	J514-20-20-20-20-070501SB
MS51517A20T	MS51517B20T	1 1/4	J514-20-20-20-20-070501TA	J514-20-20-20-20-070501TB
MS51517A20TF	MS51517B20TF	1 1/4	Not available	Not available
MS51517A20Z	MS51517B20Z	1 1/4	J514-20-20-20-20-070501ZA	J514-20-20-20-20-070501ZB
MS51517A20ZC	MS51517B20ZC	1 1/4	Not available	Not available
MS51517B24	MS51517A24	1 1/2	Not available	Not available
MS51517B24H	MS51517A24H	1 1/2	Not available	Not available
MS51517B24J	MS51517A24J	1 1/2	Not available	Not available
MS51517B24M	MS51517A24M	1 1/2	J514-24-24-24-24-070501MA	J514-24-24-24-24-070501MB
MS51517B24N	MS51517A24N	1 1/2	J514-24-24-24-24-070501NA	J514-24-24-24-24-070501NB
MS51517B24P	MS51517A24P	1 1/2	J514-24-24-24-24-070501PA	J514-24-24-24-24-070501PB
MS51517B24R	MS51517A24R	1 1/2	Not available	Not available
MS51517B24S	MS51517A24PS	1 1/2	J514-24-24-24-24-070501SA	J514-24-24-24-24-070501SB
MS51517B24T	MS51517A24T	1 1/2	J514-24-24-24-24-070501TA	J514-24-24-24-24-070501TB
MS51517B24TF	MS51517A24TF	1 1/2	Not available	Not available
MS51517B24Z	MS51517A24Z	1 1/2	J514-24-24-24-24-070501ZA	J514-24-24-24-24-070501ZB
MS51517B24ZC	MS51517A24ZC	1 1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51517 to SAE-J514 cross reference - Continued.

Inactive for new design MS51517- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51517B32	MS51517A32	2	Not available	Not available
MS51517B32H	MS51517A32H	2	Not available	Not available
MS51517B32H	MS51517A32H	2	Not available	Not available
MS51517B32M	MS51517A32M	2	J514-32-32-32-32-070501MA	J514-32-32-32-32-070501MB
MS51517B32N	MS51517A32N	2	J514-32-32-32-32-070501NA	J514-32-32-32-32-070501NB
MS51517B32P	MS51517A32P	2	J514-32-32-32-32-070501PA	J514-32-32-32-32-070501PB
MS51517B32R	MS51517A32R	2	Not available	Not available
MS51517B32S	MS51517A32S	2	J514-32-32-32-32-070501SA	J514-32-32-32-32-070501SB
MS51517B32T	MS51517A32T	2	J514-32-32-32-32-070501TA	J514-32-32-32-32-070501TB
MS51517B32TF	MS51517A32TF	2	Not available	Not available
MS51517B32Z	MS51517A32Z	2	J514-32-32-32-32-070501ZA	J514-32-32-32-32-070501ZB
MS51517B32ZC	MS51517A32ZC	2	Not available	Not available

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

FED-STD-595/36076	FED-STD-595/36293	ASTM B564	SAE-AMS5639
FED-STD-595/36081	MIL-DTL-16232	ASTM B633	SAE-AMS5645
FED-STD-595/36099	MS51531	ASTM B695	SAE-AMS5647
FED-STD-595/36118	MS51533	ASTM F1136/F1136M	SAE-AMS5743
FED-STD-595/36134	MS51860	SAE-AMS-C-81562	SAE-AMS6370
FED-STD-595/36152	QQ-N-281	SAE-AMS-QQ-P-416	SAE-AMS6382
FED-STD-595/36170	ASME B1.1	SAE-AMS2417	SAE-J403
FED-STD-595/36173	ASTM A276/A276M	SAE-AMS2451/5	SAE-J425
FED-STD-595/36176	ASTM A564/A564M	SAE-AMS2451/9	SAE-J514
FED-STD-595/36231	ASTM A582/A582M	SAE-AMS2486	
FED-STD-595/36251	ASTM B117	SAE-AMS2488	
FED-STD-595/36270	ASTM B164	SAE-AMS2700	
FED-STD-595/36280	ASTM B166	SAE-AMS4928	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2016-017)

Review activities:
Army - AT, MI
Navy - CG, MC, SA, SH
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.