
Form Approved
OMB No. 0704-0188

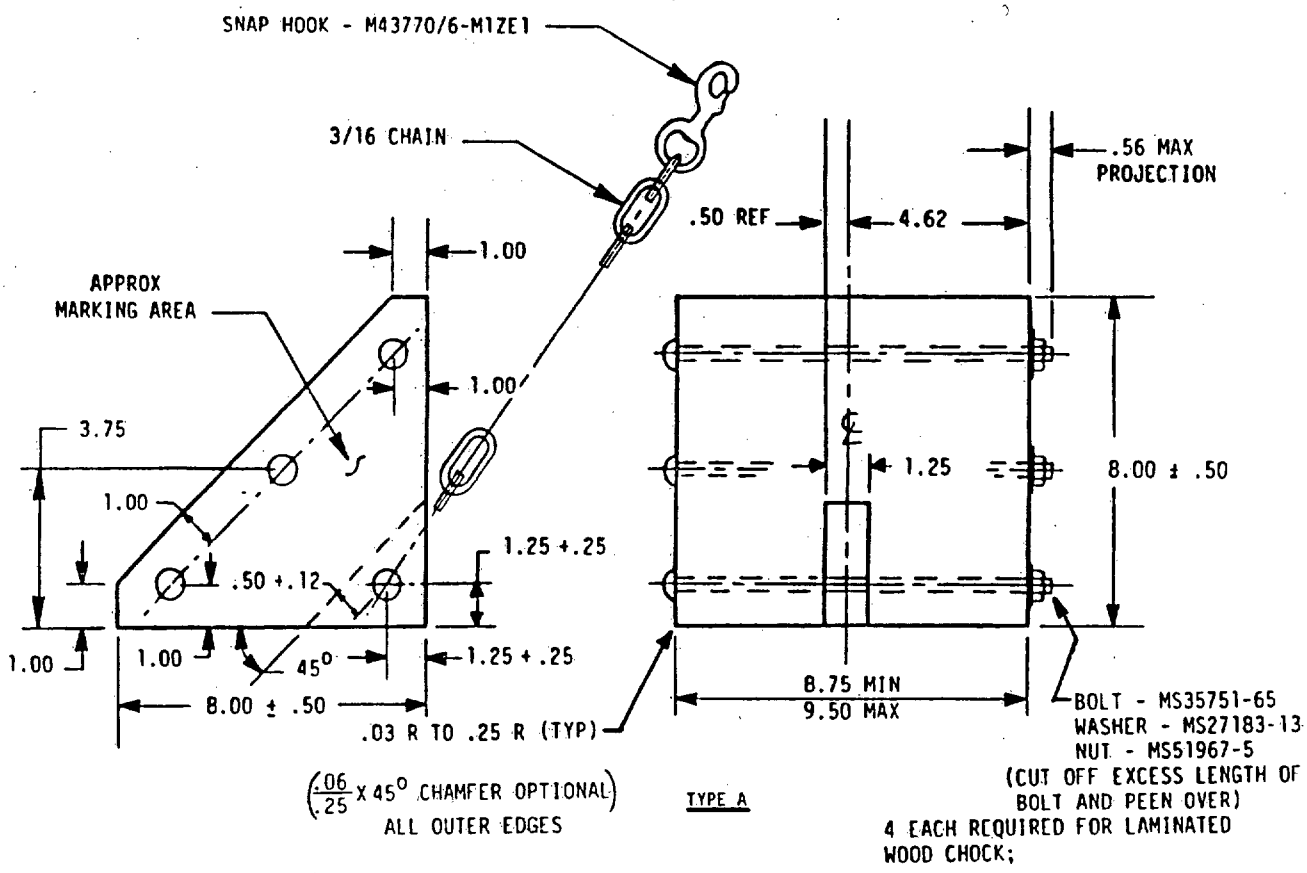


(.06/.25 X 45° CHAMFER OPTIONAL) ALL OUTER EDGES

TYPE A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

© REVISION LETTERS ARE NOT USED TO DENOTE CHANGES DUE TO THE EXTENSIVENESS OF THE CHANGES.


| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-AT<br>CUSTODIANS: ARMY- NAVY- YD<br>AIR FORCE- DLA-<br>REVIEW:<br>USER: ARMY-ME, NAVY-YD<br>PROJECT NUMBER: 2540-A349 | MILITARY SPECIFICATION SHEET<br>TITLE: CHOCK, WHEEL | SPECIFICATION SHEET NUMBER:<br>MS52127C<br>22 DECEMBER 1988<br>SUPERSEDING:<br>MS52127B, 22 DECEMBER 1975<br>AMSC-NA FSC- 2540 |
| DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. | | Page 1 of 3 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

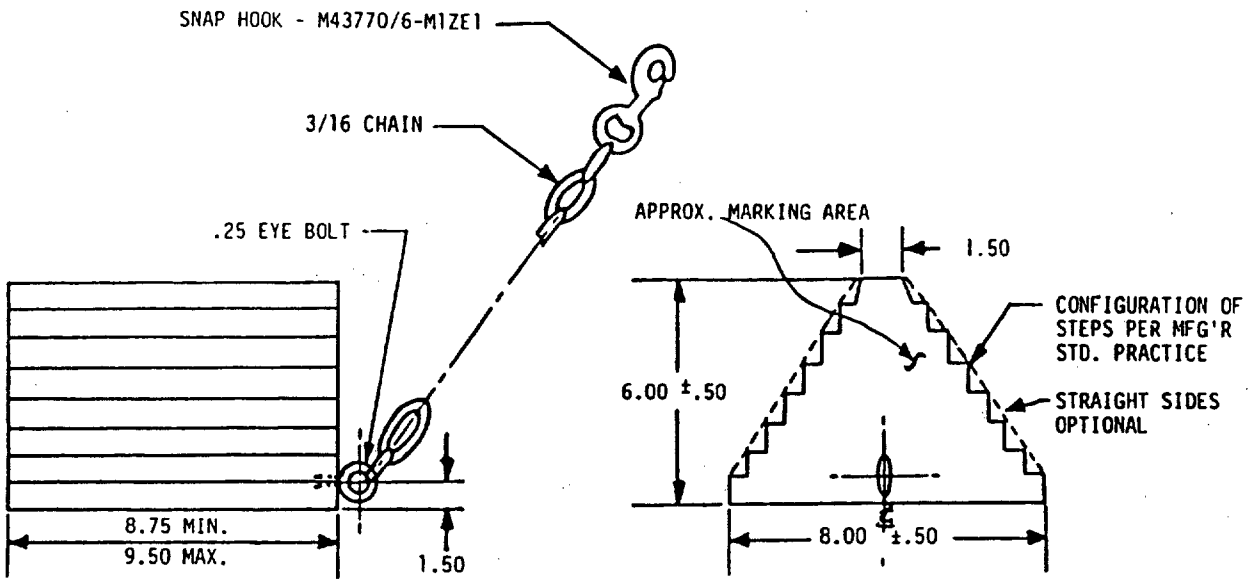


TYPE B

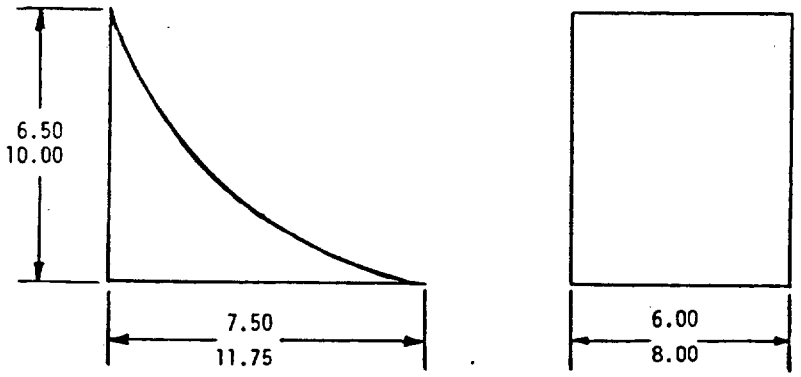


CHAIN AND HOOK ASS'Y SHALL BE AS TYPE A, B, OR C.

MAXIMUM ALLOWABLE WEIGHT FOR EACH CAST OR EXTRUDED BLOCK IS 12 LBS.

TYPE C

| MS PART NUMBER | TYPE | CHAIN LENGTH | FORMER PART NUMBER |
|---|---|---|---|
| MS52127-3 | A | 92 INCHES | 7979235 |

NOTE: DASH NUMBERS -1, -2, AND -4 ARE SUPERSEDED BY DASH NUMBER -3 FOR FUTURE PROCUREMENT.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

REQUIREMENTS:

1. CHOCK MATERIAL.
   TYPE A OR B: WOOD, LAMINATED, 1.25 MINIMUM THICK LAMINA IN ACCORDANCE WITH CLASS A, TABLE I OF MIL-W-3912.
   TYPE B: RUBBER, GRADE RS720 $BC_1$ DF $_2$ PER MIL-R-3065 OR COMMERCIAL SUBSTITUTE RUBBER MATERIALS OF EQUIVALENT GRADE, TYPE AND QUALITY.
   TYPE C: CAST OR EXTRUDED NON-FERROUS METAL, WHICH IS "SPARKPROOF".
2. CHAIN ASSEMBLY.
   a. CHAIN SHALL BE FABRICATED PER RR-C-271, TYPE 1, GRADE C, CLASS 4, STYLE 1, ZINC COATED.
   b. END LINKS SHALL BE 3/16 SIZE, PER RR-C-271, TYPE III, ZINC COATED.
   c. EYE BOLTS SHALL BE ZINC COATED IAW ASTM A153 OR ASTM A633.
3. FINISH.
   a. WOOD SURFACES (ALL MATING WOOD SURFACES AND ALL EXTERIOR WOOD SURFACES).
      PRIME PER SPEC MIL-P-52192, MIL-P-53030, OR MIL-P-53022.
      DRY FILM THICKNESS: 0.8 - 1.2 MILS.
      TOPCOAT, COLOR GREEN 383, PER SPEC MIL-C-46168 OR MIL-C-53039.
      DRY FILM THICKNESS: 1.8 MILS MINIMUM.
   b. STEEL SURFACES (ALL SURFACES OF FERROUS PARTS).
      CLEAN PER SPEC TT-C-490, METHOD - OPTIONAL.
      PRIME PER MIL-P-52192, MIL-P-53030, OR MIL-P-53022.
      DRY FILM THICKNESS: 0.8 - 1.2 MILS.
      TOPCOAT, COLOR GREEN 383, PER SPEC MIL-C-46168 OR MIL-C-53039.
      DRY FILM THICKNESS: 1.8 MILS MINIMUM.

   c. ALUMINUM SURFACES (ALL SURFACES OF ALUMINUM PARTS).
      CLEAN PER SPEC MIL-C-10578, TYPE 1.
      TREAT PER SPEC MIL-C-5541.
      PRIME PER SPEC MIL-P-23377, MIL-P-53030, OR MIL-P-53022.
      DRY FILM THICKNESS: 0.8 - 1.2 MILS.
      TOPCOAT, COLOR GREEN 383, PER SPEC MIL-C-46168 OR MIL-C-53039.
      DRY FILM THICKNESS: 1.8 MILS MINIMUM.
   d. RUBBER AND RUBBER COMPOUNDS.
      RUBBER AND "RUBBER" COMPOUNDS SHALL NOT BE PAINTED AND SHALL BE MOLDED COLOR-BLACK.

NOTES:
1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE $\pm$ .25 ON DECIMALS AND $\pm$ 2° ON ANGULAR DIMENSIONS.
4. MARKINGS SHALL CONSIST OF THE MS PART NUMBER IN ACCORDANCE WITH MIL-STD-130, AND SHALL BE LOCATED ON A SURFACE THAT WOULD NOT BE IN CONTACT WITH TIRE OR GROUND.
5. BASE AREA OF THE CHOCK WHICH WILL HAVE CONTACT WITH GROUND (IN NORMAL POSITION) SHALL BE 40 SQ. IN. MIN.
6. TYPE C CHOCK BLOCK SHALL HAVE ONE SURFACE (THAT WOULD NORMALLY BE IN CONTACT WITH THE TIRE) THAT HAS A CURVATURE TO MATCH ONE OF THE MID-RANGE CURRENT COMMERCIAL TRUCK TIRE SIZES/DIAMETERS.
7. WHEN POSITIONED IN CONTACT WITH A RUBBER TIRE WHEEL (AT REST), SHALL MAINTAIN THE WHEEL AT REST WITHIN THE LIMITS OF SAE J348.
8. CHOCK BLOCK SHALL BE FURNISHED AS A COMPLETE PAINTED ASSEMBLY (WITH CHAIN ATTACHED, ETC.).

This specification is approved for use by all Departments and Agencies of the Department of Defense.

| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-AT<br>CUSTODIANS: ARMY- NAVY-YD<br>AIR FORCE- DLA-<br>REVIEW:<br>USER:ARMY-ME, NAVY-YD<br>PROJECT NUMBER:2540-A349 | MILITARY SPECIFICATION SHEET<br>TITLE: CHOCK, WHEEL | SPECIFICATION SHEET NUMBER:<br>MS52127C<br>22 DECEMBER 1988<br>SUPERSEDING:<br>MS52127B, 22 DECEMBER 1975<br>AMSC-NA FSC-2540 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:202
Check the source to verify that this is the current version before use.