FED. SUP CLASS 4720

CONFIGURATION AND MATERIAL CORROSION RESISTANT STEEL (450°F)	FITTING END (MIL-F-27272)		(MIL-H-27267) HOSE CUT OFF FACTOR (HCOF) INCHES VS HOSE DASH SIZE NO.									
1 2	1	2	-3/4C	-4C	-5C	-6C	-8C	-10C	-12C	-16C	-20C	-24C
ASSEMBLY LENGTH TYPICAL STYLE A	MS27381	MS27381	1,84	1,78	1,86	2,04	2,32	2,64	2,80	3,16	3,44	4,14
STYLE B	MS27381	MS27384	2,15	2,18	2,25	2,45	3,11					
	MS27381	MS27382						3,09	3,63	3,91	4,33	5,10
STYLE C	MS27381	MS27385	1,78	1,80	1,90	2,05	2,47					
	MS27381	MS27383						2,73	3,32	3,63	4,06	4,75
STYLE D	MS27384	MS27384	2,46	2,58	2,64	2,86	3,90					
	MS27382	MS27382						3,54	4,46	4,66	5,22	6,06
STYLE E	MS27384	MS27385	2,09	2,20	2,29	2,46	3,26					
	MS27382	MS27383						3,18	4,15	4,38	4,95	5,71
STYLE F	MS27385	MS27385	1,72	1,82	1,94	2,06	2,62					
	MS27383	MS27383						2,82	3,84	4,10	4,68	5,36

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -6, 3/8 TUBE OD, 20-1/2 ASSEMBLY LENGTH, STYLE A.
THE BULK HOSE LENGTH = 20.50 - THE HCOF = 20.50 - 2.04 = 18.46.
BULK HOSE LENGTH REQUIRED IS 18.46 INCHES.

FITTINGS TO MATE WITH PARTS DESIGNED TO MS33514.

© ENTIRE STANDARD REVISED.

APPROVED 28 FEB 67 REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1985

Basic Activities: Army - GL, Navy - AS, Air Force - 99, DLA - CS

User Activities: Army - AR, MI, Navy - SH, Air Force - 11, DLA -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD MS 8001
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES:	SHEET 1 of 4 FSC 4720

Project No. 4720-0532

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4720

CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275°F)	FITTING END (MIL-F-27272)		(MIL-H-27267) HOSE CUT OFF FACTOR (HCOF) INCHES VS HOSE DASH SIZE NO.									
1 2	1	2					-8	-10	-12	-16	-20	-24
ASSEMBLY LENGTH TYPICAL STYLE G	MS27381	MS27381					2.32	2.64	2.80	3.16	3.44	4.14
STYLE H	MS27381	MS27384					3.11					
	MS27381	MS27382						3.09	3.63	3.91	4.33	5.10
STYLE J	MS27381	MS27385					2.47					
	MS27381	MS27383						2.73	3.32	3.63	4.06	4.75
STYLE K	MS27384	MS27384					3.90					
	MS27382	MS27382						3.54	4.46	4.66	5.22	6.06
STYLE M	MS27384	MS27385					3.26					
	MS27382	MS27383						3.18	4.15	4.38	4.95	5.71
STYLE N	MS27385	MS27385					2.62					
	MS27383	MS27383						2.82	3.84	4.10	4.68	5.36

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -8, 1/2 TUBE OD, 20-1/2 ASSEMBLY LENGTH, STYLE G,
THE BULK HOSE LENGTH = 20.50 - THE HCOF = 20.50 - 2.32 = 18.18.
BULK HOSE LENGTH REQUIRED IS 18.18 INCHES.

FITTINGS TO MATE WITH PARTS DESIGNED TO MS33514.

APPROVED 28 FEB 67 REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1985

User Activities: Army - AR, MI; Navy - SH; Air Force -; DLA -

Review Activities: Army - GL; Navy -; Air Force -; DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES:


MILITARY STANDARD


MS 8001

SHEET 2 of 4 FSC 4720

Project No. 4720-0532

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

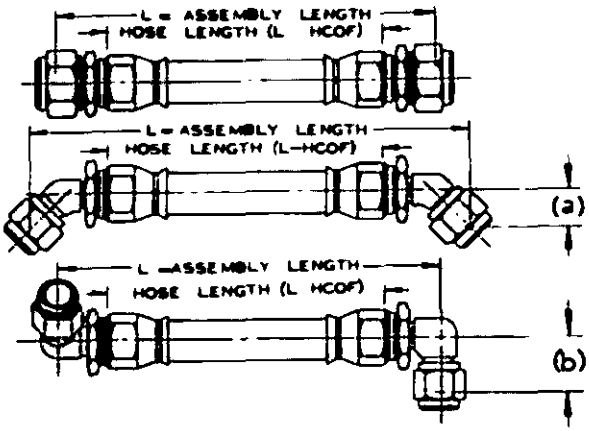

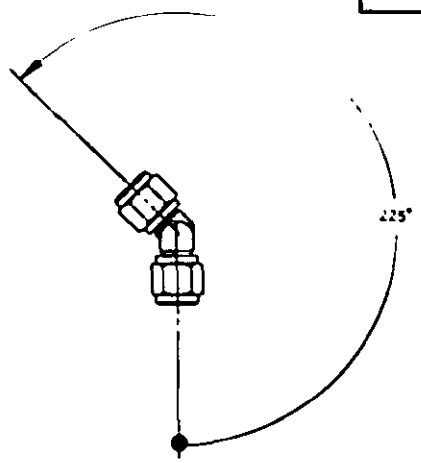

EXAMPLE OF ANGULAR ALIGNMENT OF END FITTING

DASH NO.	TUBING O.D. REF	SIZE	DROP HEIGHT OF ELBOW FITTING MAX	
			(a)	(b)
-3/-4	NOTE 2	B	.452	.761
-4	1/4	E	.444	.745
-5	5/16	F	.460	.828
-6	3/8	G	.546	.935
-8	1/2	H	.642	1.072
-10	5/8	J	.760	1.427
-12	3/4	K	.835	1.661
-16	1	M	.889	1.811
-20	1-1/4	N	.997	2.091
-24	1-1/2	P	1.198	2.473

ANGLE BETWEEN ELBOW FITTINGS, WHEN PROJECTED ON A PLANE PERPENDICULAR TO THE HOSE AXIS SHALL BE SPECIFIED. SIGHTING ALONG THE AXIS OF THE HOSE, THE ANGLE SPECIFIED WILL BE THE ANGLE THAT THE FURTHEREST ELBOW FITTING SHOULD BE ROTATED COUNTER-CLOCKWISE. TOLERANCE ON ANGULAR ALIGNMENT ± 2°.

LENGTH "L" TO BE MEASURED BETWEEN CENTERS OF NIPPLE ENDS ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH INCREMENTS. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH INCREMENTS. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH INCREMENTS.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%.

THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE, AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

EXAMPLE OF PART NO.

MS8001H18G*090

- HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 18 INCHES IN LENGTH 90° BETWEEN ELBOWS.
- ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, AND J)
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 AND 2)
- LENGTH IN EIGHTS (1/8) OF AN INCH.
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- SIZE H = -8 OR 5/8 INCH TUBE O.D.

MS8001J09Z8*

- HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH.
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING MATERIAL (SEE SHEETS 1 AND 2)
- LENGTH IN EIGHTS (1/8) OF AN INCH.
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, ETC.)
- SIZE J = -10 OR 5/8 INCH TUBE O.D.

* ADD CODE LETTER AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

USER ACTIVITIES Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for reprocurement use shall be made from this document.

APPROVED 28 FEB 67 REVISED 16 AUG 71 15 DEC 76 30 June 1985

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD MS 8001
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 3 of 4 FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +25°F (+121°C)
"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E" AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"L" LOCKWIRE HOLE
"F" CODE A + L
"G" CODE B + L
"H" CODE C + L
"J" CODE D + L
"K" CODE E + L

NOTES:

1. IN COMBINATION CRES AND ALUMINUM FITTINGS, THE SOCKET, SLEEVE, AND RETAINER WIRE ARE CORROSION RESISTING STEEL. THE OTHER PARTS ARE ALUMINUM.
2. A -3/-4 ASSEMBLY CONSISTS OF -3 TUBE O.D. FITTINGS WITH -4 TUBE O.D. HOSE
3. DIMENSIONS IN INCHES.
4. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS RERERENCED HEREIN.
6. FOR DETAIL DESIGN AND SIZE OF END FITTINGS, SEE CORRESPONDING DASH NUMBER ON APPLICABLE MS DRAWING.
7. FOR "IDENTIFICATION OF PRODUCT," SEE PROCUREMENT SPECIFICATION.
8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION. CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

USER ACTIVITIES: Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES: Army - GL
Navy -
Air Force -
DLA - CS

APPROVED 28 FEB 67 REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD MS 8001
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 4 of 4 FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.