
FED. SUP CLASS
8475

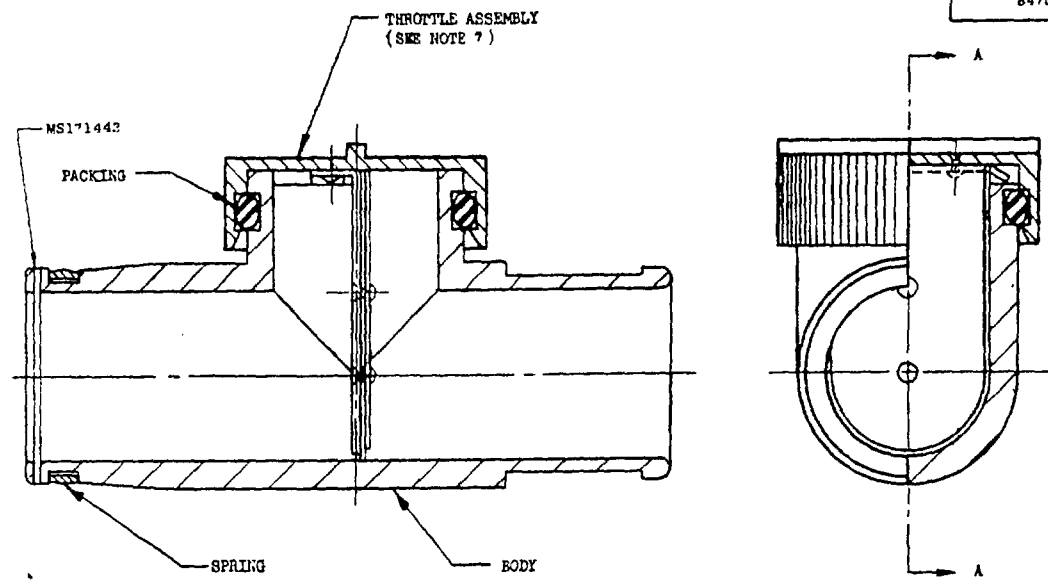

SECTION A-A

DASH NO.
-1

NOTES:

1. MATERIAL: a. BODY, ALUMINUM ALLOY FORGING IN ACCORDANCE WITH QQ-A-367, COMP 2014, TEMPER T6.
   b. SPRING, STEEL, 1095, IN ACCORDANCE WITH MIL-S-7947 COND 1 OR 2.
   c. BLADE & PLATE, ALUMINUM ALLOY, 3003, IN ACCORDANCE WITH QQ-A-250/2, TEMPER H14.
   d. KNOB, ALUMINUM ALLOY 2024, IN ACCORDANCE WITH QQ-A-225/6, TEMPER T4.
   e. INSERT, RUBBER, IN ACCORDANCE WITH MIL-R-6855, CLASS 11, GRADE 60.
   f. PACKING, RUBBER, IN ACCORDANCE WITH MIL-R-6855, CLASS 11, GRADE 50.

2. FINISH: a. BODY, PLATE, BLADE AND KNOB ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE 11, DYED RED.
   b. SPRING, CHROMIUM PLATE IN ACCORDANCE WITH QQ-C-320, CLASS 1, TYPE 1.
   PRIOR TO ANODIZING, ALL EXTERNAL SURFACES OF THE BODY SHALL BE FINISHED 125/.
3. 63/ ALL OVER EXCEPT AS NOTED. SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH ANSI B46.1.
4. HEAT TREAT: SPRING, HARDEN AND DRAWN AT 750°F.
5. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. PRESS THROTTLE ASSEMBLY OVER MOUNTED "O" RING. LUBRICATE "O" RING LIGHTLY. THIS SHALL BE THE LAST STEP. (DISASSEMBLY IS ONLY POSSIBLE BY DESTROYING "O" RING.)
(A) 8. USAGE: INTENDED FOR USE WITH CWU-33/P ANTI-EXPOSURE SUIT UTILIZING COCKPIT MOUNTED VENTILATION BLOWER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) DENOTES CHANGES

APPROVED 27 APR 1965 REVISED (A) 15 APRIL 83


This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY -AS Other Cust	TITLE CONNECTOR ASSEMBLY, MALE, FLOW CONTROL AND QUICK DISCONNECT	MILITARY STANDARD MS90350(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF 55B3546 "FOR NAVY USE ONLY"	SHEET 1 OF 3

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 8475-N185 PLATE NO. 14938


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
8475

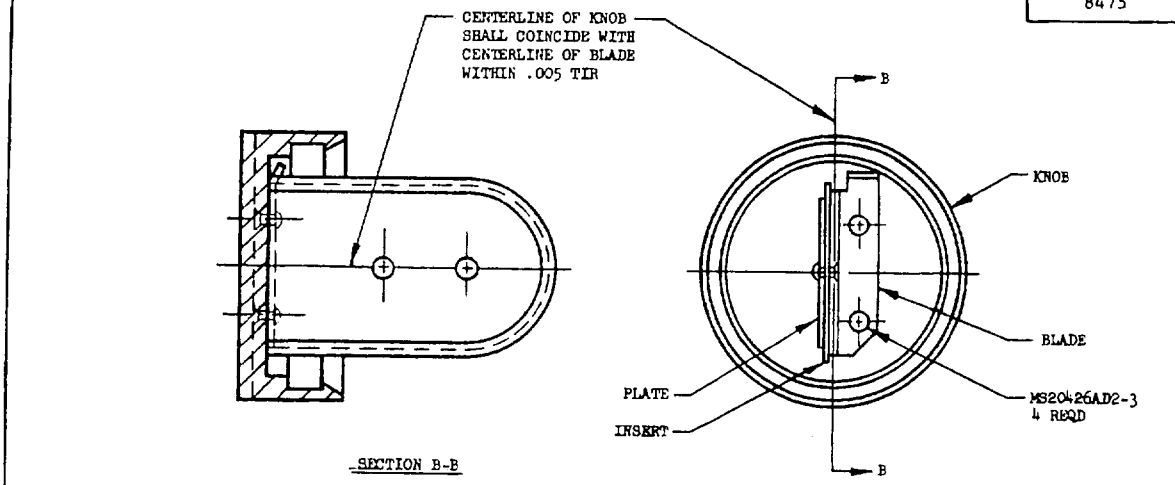


SECTION B-B

THROTTLE ASSEMBLY

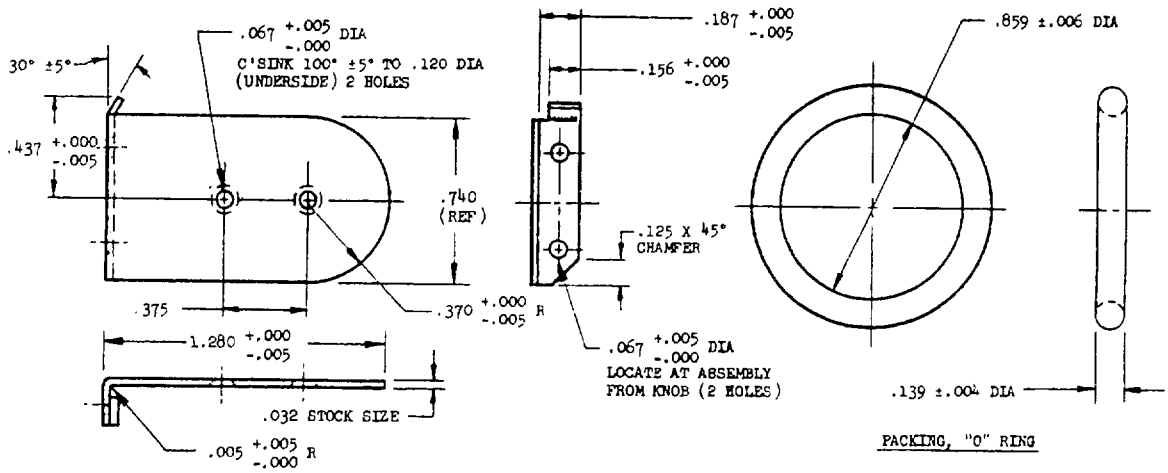

BLADE

PACKING, "O" RING

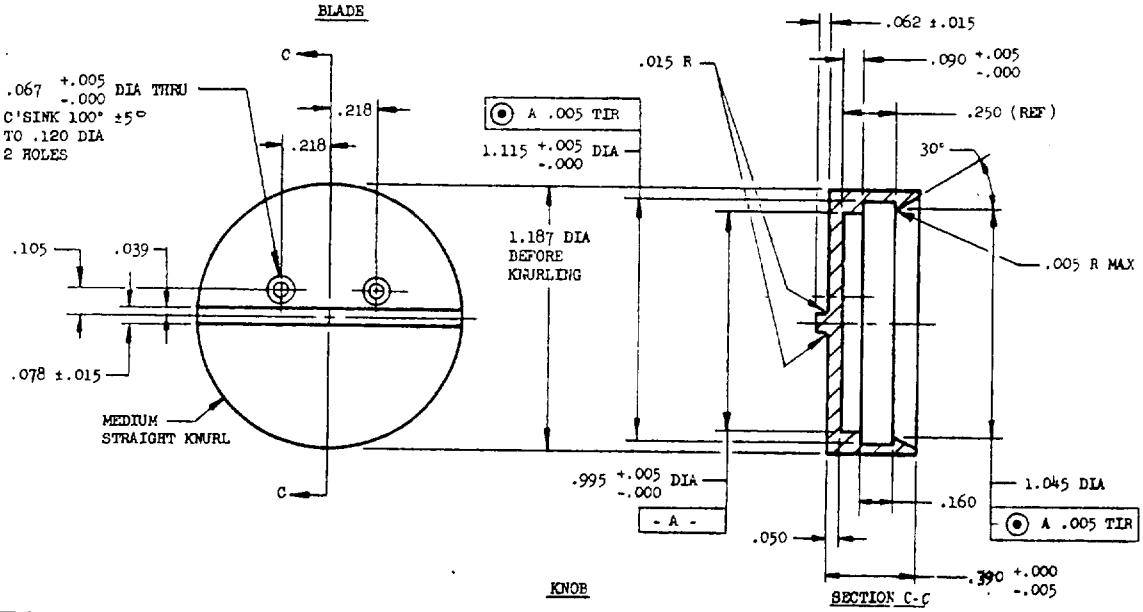

KNOB

SECTION C-C

APPROVED 27 APR 1965 REVISED (A) FOR CHANGES SEE SHEET 1

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE CONNECTOR ASSEMBLY, MALE, FLOW CONTROL AND QUICK DISCONNECT	MILITARY STANDARD MS90350(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF 55B3546"FOR NAVY USE ONLY"	SHEET 2


DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 14936

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
8475

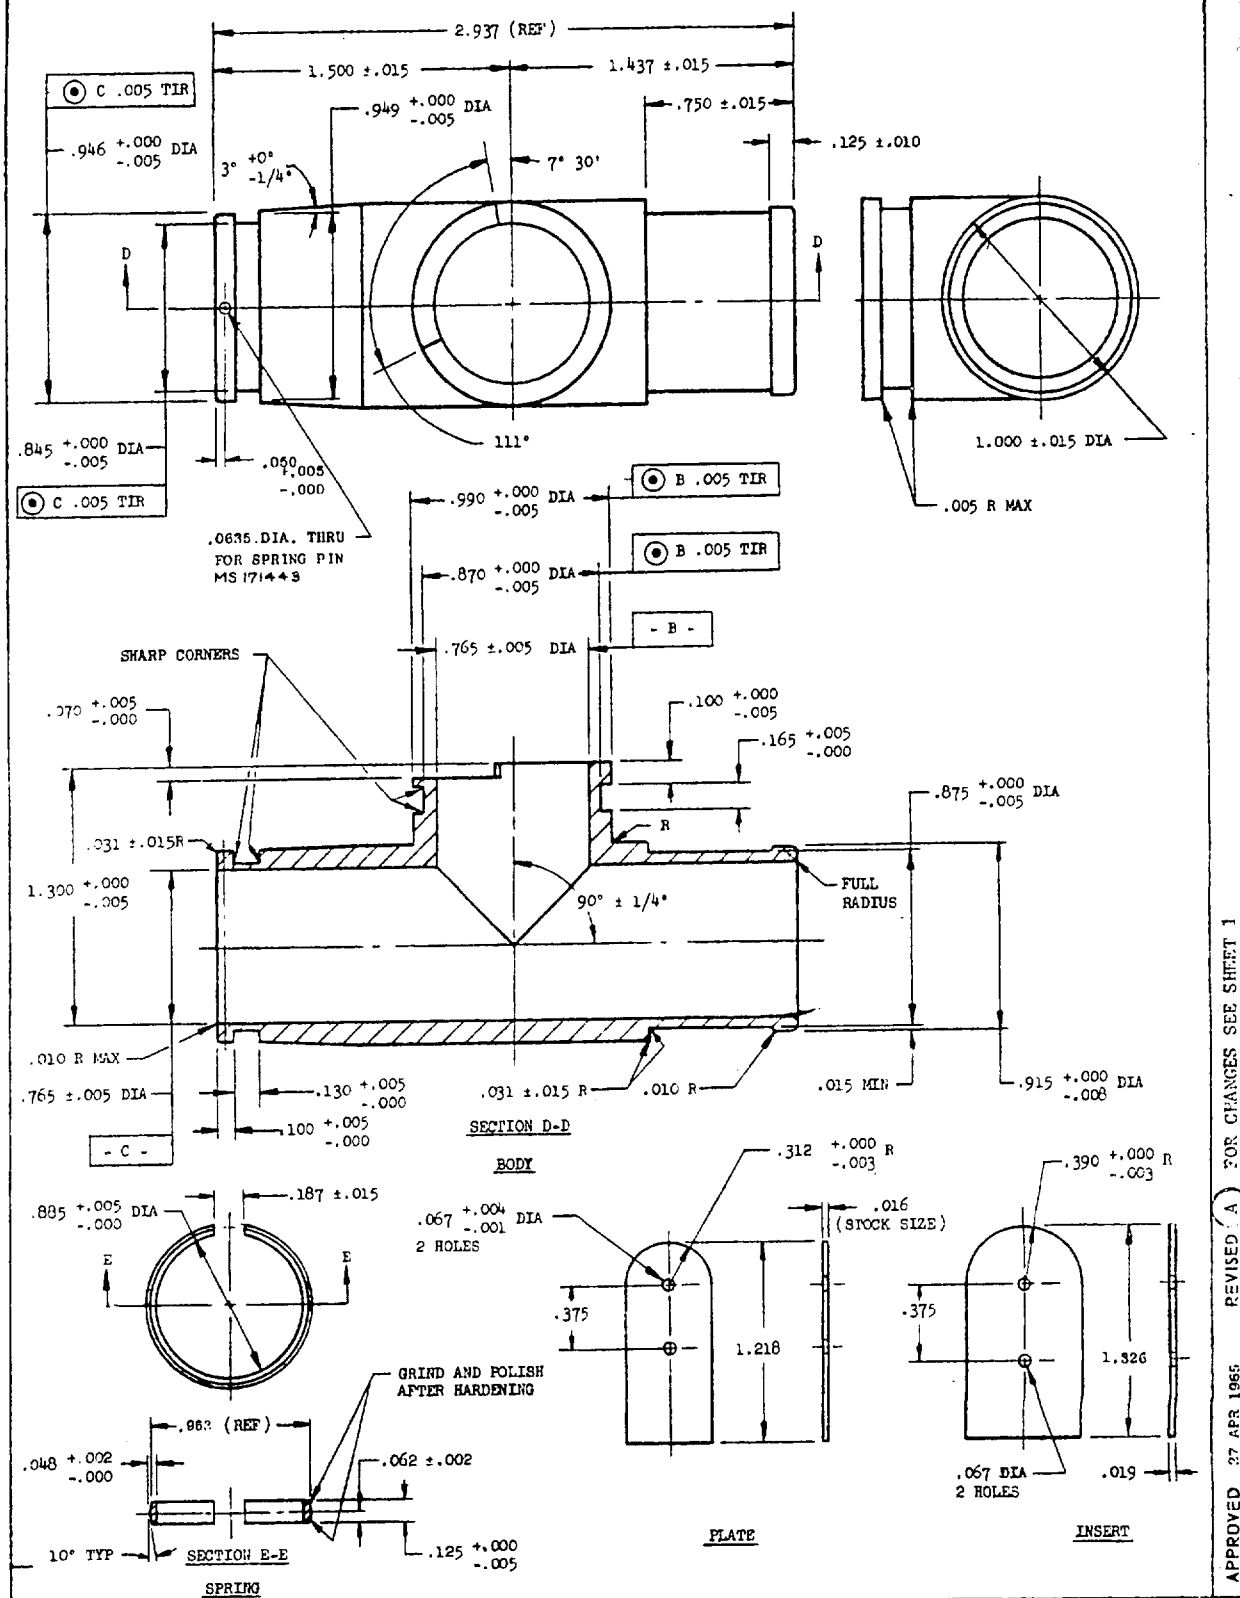

APPROVED 27 APR 1965 REVISED (A) FOR CHANGES SEE SHEET 1

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY- AS Other Cust	TITLE CONNECTOR ASSEMBLY, MALE, FLOW CONTROL AND QUICK DISCONNECT	MILITARY STANDARD MS90350(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF 55D3546 "FOR NAVY USE ONLY"	SHEET 3

DD FORM SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 14478

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.