
FED SUP CLASS
5315

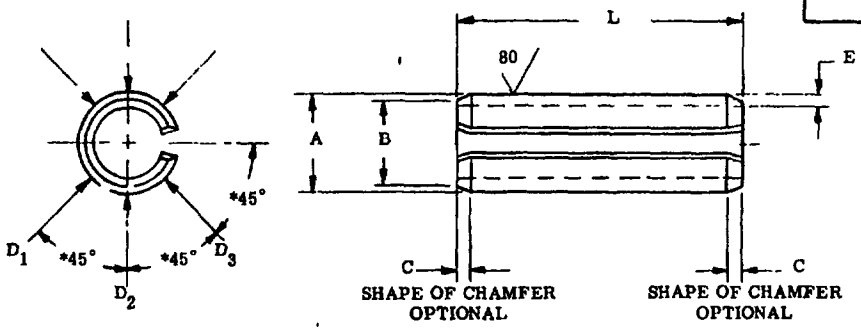

*APPROX

A			B	C		E	RECOMMENDED HOLE SIZE		APPROX WEIGHT LBS PER 100
NOMINAL	MAXIMUM (GO RING GAGE)	MIN AVERAGE DIA $(D_1+D_2+D_3)\,1/3$	MAX	MIN	MAX	STOCK THICKNESS	MIN	MAX	
.062	.069	.066	.059	.007	.028	.012	.062	.065	L x .049
.078	.086	.083	.075	.008	.032	.018	.078	.081	L x .092
.094	.103	.099	.091	.008	.038	.022	.094	.097	L x .140
.125	.135	.131	.122	.008	.044	.028	.125	.129	L x .240
.156	.167	.162	.151	.010	.048	.032	.156	.160	L x .340
.188	.199	.194	.182	.011	.055	.040	.187	.192	L x 510
.219	.232	.226	.214	.011	.065	.048	219	.224	L x .700
.250	.264	.258	.245	.012	.065	.048	.250	.256	L x .850
.312	.328	.321	.306	.014	.080	.062	.312	.318	L x 1.30
.375	.392	.385	.368	.016	.095	.077	.375	.382	L x 1.90
.438	.456	.448	.430	.017	.095	.077	.437	.445	L x 2.40
.500	.521	.513	.485	.025	.110	.094	.500	.510	L x 3.20

MATERIAL: STEEL - AMS5120 OR AMS5121
FINISH: PHOSPHATE - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS291
MANUFACTURING SPECIFICATION: AMS7205
BREAK SHARP EDGES: .003-.015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES.
SEE PAGE 2 FOR PART NUMBERS

(A) CANCELED AFTER 3 NOV 80 USE MS171401 THRU MS171900. INTERCHANGEABILITY RELATIONSHIP: MS171401 THRU MS171900 ITEMS CAN REPLACE THE CANCELED MS9047 ITEMS. THE CANCELED MS9047 ITEMS SHOULD BE USED FOR REPLACEMENT PURPOSES UNTIL EXISTING STOCK IS DEPLETED USE THE SUPERSEDING MS ITEMS FOR DESIGN

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE. (A) Denotes Changes

APPROVED 10 AUG 1956 REVISED (A) 3 NOV 80

User activities:

Review activities:
ARMY - ME, MI
DLA - IS
NS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. 11	TITLE	MILITARY STANDARD
Other Cust AS	PIN - SPRING, STEEL, PHOSPHATE FINISH	MS9047
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0315 PLATE NO 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Review activities:
ARMY - ME, MI
DLA - IS
NS

User activities:

DD FORM 1 MAR 72 672-1 (Coordinated)

PROCUREMENT SPECIFICATION NONE

SUPERSEDES

P.A. 11

Other Coast AS

TITLE

PIN - SPRING, STEEL, PHOSPHATE FINISH

MILITARY STANDARD

MS9047

SHEET 2 OF 2

5315-0315

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 22068

LENGTH L	NOMINAL DIAMETER											
	.063	.078	.094	.125	.156	.188	.219	.250	.312	.375	.438	.500
.188 ± .015	MS9047-002											
.250 ± .015	MS9047-003	MS9047-034	MS9047-065	MS9047-096								
.312 ± .015	MS9047-004	MS9047-035	MS9047-066	MS9047-097	MS9047-128	MS9047-159						
.375 ± .015	MS9047-005	MS9047-036	MS9047-067	MS9047-098	MS9047-129	MS9047-160	MS9047-191	MS9047-222				
.438 ± .015	MS9047-006	MS9047-037	MS9047-068	MS9047-099	MS9047-130	MS9047-161	MS9047-192	MS9047-223				
.500 ± .015	MS9047-007	MS9047-038	MS9047-069	MS9047-100	MS9047-131	MS9047-162	MS9047-193	MS9047-224				
.562 ± .015	MS9047-008	MS9047-039	MS9047-070	MS9047-101	MS9047-132	MS9047-163	MS9047-194	MS9047-225	MS9047-256	MS9047-287		
.625 ± .015	MS9047-009	MS9047-040	MS9047-071	MS9047-102	MS9047-133	MS9047-164	MS9047-195	MS9047-226	MS9047-257	MS9047-288		
.688 ± .015	MS9047-010	MS9047-041	MS9047-072	MS9047-103	MS9047-134	MS9047-165	MS9047-196	MS9047-227	MS9047-258	MS9047-289		
.750 ± .015	MS9047-011	MS9047-042	MS9047-073	MS9047-104	MS9047-135	MS9047-166	MS9047-197	MS9047-228	MS9047-259	MS9047-290		
.812 ± .015	MS9047-012	MS9047-043	MS9047-074	MS9047-105	MS9047-136	MS9047-167	MS9047-198	MS9047-229	MS9047-260	MS9047-291		
.875 ± .015	MS9047-013	MS9047-044	MS9047-075	MS9047-106	MS9047-137	MS9047-168	MS9047-199	MS9047-230	MS9047-261	MS9047-292		
.938 ± .015	MS9047-014	MS9047-045	MS9047-076	MS9047-107	MS9047-138	MS9047-169	MS9047-200	MS9047-231	MS9047-262	MS9047-293		
1.000 ± .015	MS9047-015	MS9047-046	MS9047-077	MS9047-108	MS9047-139	MS9047-170	MS9047-201	MS9047-232	MS9047-263	MS9047-294	MS9047-325	
1.125 ± .020	MS9047-016	MS9047-047	MS9047-078	MS9047-109	MS9047-140	MS9047-171	MS9047-202	MS9047-233	MS9047-264	MS9047-295	MS9047-326	
1.250 ± .020		MS9047-048	MS9047-079	MS9047-110	MS9047-141	MS9047-172	MS9047-203	MS9047-234	MS9047-265	MS9047-296	MS9047-327	MS9047-358
1.375 ± .020		MS9047-049	MS9047-080	MS9047-111	MS9047-142	MS9047-173	MS9047-204	MS9047-235	MS9047-266	MS9047-297	MS9047-328	MS9047-359
1.500 ± .020		MS9047-050	MS9047-081	MS9047-112	MS9047-143	MS9047-174	MS9047-205	MS9047-236	MS9047-267	MS9047-298	MS9047-329	MS9047-360
1.625 ± .020		MS9047-051	MS9047-082	MS9047-113	MS9047-144	MS9047-175	MS9047-206	MS9047-237	MS9047-268	MS9047-299	MS9047-330	MS9047-361
1.750 ± .020		MS9047-052	MS9047-083	MS9047-114	MS9047-145	MS9047-176	MS9047-207	MS9047-238	MS9047-269	MS9047-300	MS9047-331	MS9047-362
1.875 ± .020		MS9047-053	MS9047-084	MS9047-115	MS9047-146	MS9047-177	MS9047-208	MS9047-239	MS9047-270	MS9047-301	MS9047-332	MS9047-363
2.000 ± .020		MS9047-054	MS9047-085	MS9047-116	MS9047-147	MS9047-178	MS9047-209	MS9047-240	MS9047-271	MS9047-302	MS9047-333	MS9047-364
2.250 ± .025					MS9047-148	MS9047-179	MS9047-210	MS9047-241	MS9047-272	MS9047-303	MS9047-334	MS9047-365
2.500 ± .025					MS9047-149	MS9047-180	MS9047-211	MS9047-242	MS9047-273	MS9047-304	MS9047-335	MS9047-366
2.750 ± .025						MS9047-181	MS9047-212	MS9047-243	MS9047-274	MS9047-305	MS9047-336	MS9047-367
3.000 ± .025						MS9047-182	MS9047-213	MS9047-244	MS9047-275	MS9047-306	MS9047-337	MS9047-368
3.250 ± .030						MS9047-183	MS9047-214	MS9047-245	MS9047-276	MS9047-307	MS9047-338	MS9047-369
3.500 ± .030						MS9047-184	MS9047-215	MS9047-246	MS9047-277	MS9047-308	MS9047-339	MS9047-370
3.750 ± .030									MS9047-278	MS9047-309	MS9047-340	MS9047-371
4.000 ± .030									MS9047-279	MS9047-310	MS9047-341	MS9047-372

PART NUMBERS WITHIN ENVELOPE ARE THOSE NORMALLY CARRIED IN STOCK BY INDUSTRY. AVAILABILITY OF PART NUMBERS OUTSIDE THE ENVELOPE SHOULD BE CHECKED BEFORE SPECIFYING. LENGTHS AND DIAMETERS FOR PART NUMBERS NOT SHOWN ARE MANUFACTURED TO SPECIAL ORDER.

DO NOT USE UNASSIGNED PART NUMBERS.

FED SUP CLASS 5315

APPROVED 10 AUG 56

(A) SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.