

FED. SUP CLASS
5305



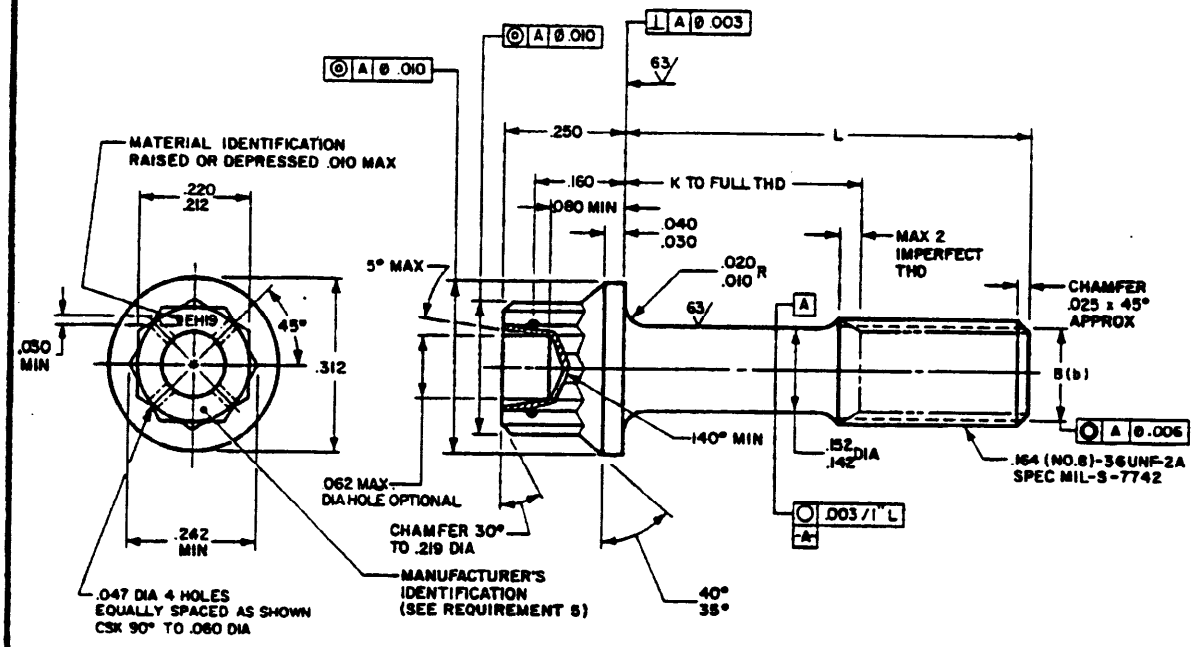

SECTION THRU THREAD PROFILE



OPTIONAL SHAPE OF HEAD

FIGURE 1

Ⓐ INACTIVE FOR NEW DESIGN AFTER 31 DECEMBER 1963.

Ⓑ DENOTES CHANGES.

APPROVED 15 AUG 60 REVISED Ⓐ 20 NOV 63 Ⓑ 13 JUNE 1988

P.A. NAVY — AS Other Cust AF-99	TITLE: SCREW, MACHINE-CRES, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, .164-36	MILITARY STANDARD MS 9188
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Continued)

PLATE NO. 22088

(PROJECT NO. 5305-1727)

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

USER SYMBOLS:

REVIEWER SYMBOLS: DLA-IS USAF-82

"Review/user information is current as of the date of this document for future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

ENGINEERING SPECIFICATIONS AND STANDARDS DEPARTMENT DATE

FED. SUP CLASS
5305

TABLE I. DIMENSIONS AND WEIGHTS

PART NO.	L	K +.000 -.060	APPROX WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX WEIGHT LB/100
MS9188-03	.312	(a)	.46	MS9188-19	1.312	.688	.95
				MS9188-20	1.375	.750	.98
MS9188-04	.375	(a)	.49	MS9188-21	1.438	.812	1.01
MS9188-05	.438	(a)	.52				
MS9188-06	.500	(a)	.55	MS9188-22	1.500	.875	1.04
				MS9188-23	1.562	.938	1.08
MS9188-07	.562	(a)	.58	MS9188-24	1.625	1.000	1.11
MS9188-08	.625	(a)	.61				
MS9188-09	.688	(a)	.64	MS9188-25	1.688	1.062	1.14
				MS9188-26	1.750	1.125	1.17
MS9188-10	.750	.125	.67	MS9188-27	1.875	1.250	1.23
MS9188-11	.812	.186	.70				
MS9188-12	.875	.250	.74	MS9188-28	2.000	1.375	1.29
MS9188-13	.938	.312	.77				
MS9188-14	1.000	.375	.80				
MS9188-15	1.062	.438	.83				
MS9188-16	1.125	.500	.86				
MS9188-17	1.188	.562	.90				
MS9188-18	1.250	.625	.92				

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS

(b) B=PITCH DIAMETER (PD)

REQUIREMENTS

(B) 1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL PER AMS 5732.

2. MANUFACTURER'S SPECIFICATION: AMS 7478.

3. PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.

4. SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED, 125 MICROINCHES PER ANSI B 46.1.

(B) 5. MANUFACTURER'S IDENTIFICATION: THE MANUFACTURER'S SYMBOL PER MIL-STD-1291 SHALL BE MARKED ON THE BOLT HEAD (SEE FIG. 1). MARKING MAY BE FORMED BY FORGING, STAMPING OR LASER. MARKING SHALL BE RAISED OR INDENTED 0.010 INCH MAXIMUM.

NOTES

1. BREAK SHARP EDGES .003-.015 INCH UNLESS OTHERWISE SPECIFIED.
2. DIMENSIONS IN INCHES.
3. DIMENSIONING AND TOLERANCING SHALL BE DONE IN ACCORDANCE WITH ANSI Y14.5-1982.
4. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS: ±.010, ANGULAR: ±5°.
5. DO NOT USE UNASSIGNED PART NUMBERS.
6. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
7. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSIONS SYSTEMS.

REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2
APPROVED 15 AUG 60

MILITARY STANDARD

MS 9188

P.A.
NAVY — AS
Other Cust
AF-99

TITLE: SCREW, MACHINE-CRES, DOUBLE HEXAGON, EXTENDED WASHER HEAD, DRILLED, .164-36

PROCUREMENT SPECIFICATION: NONE

SUPERSEDES:

SHEET 1 OF 2

PLATE NO. 23009

DD FORM 1 MAR 72 672-1

USER SYMBOLS:

REVIEWER SYMBOLS:
DLA-IS
USAF-82

"Review/user information is current as of the date of this document for future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.