NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the AIR FORCE [redacted] and Navy Departments as the AIR FORCE [redacted]-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

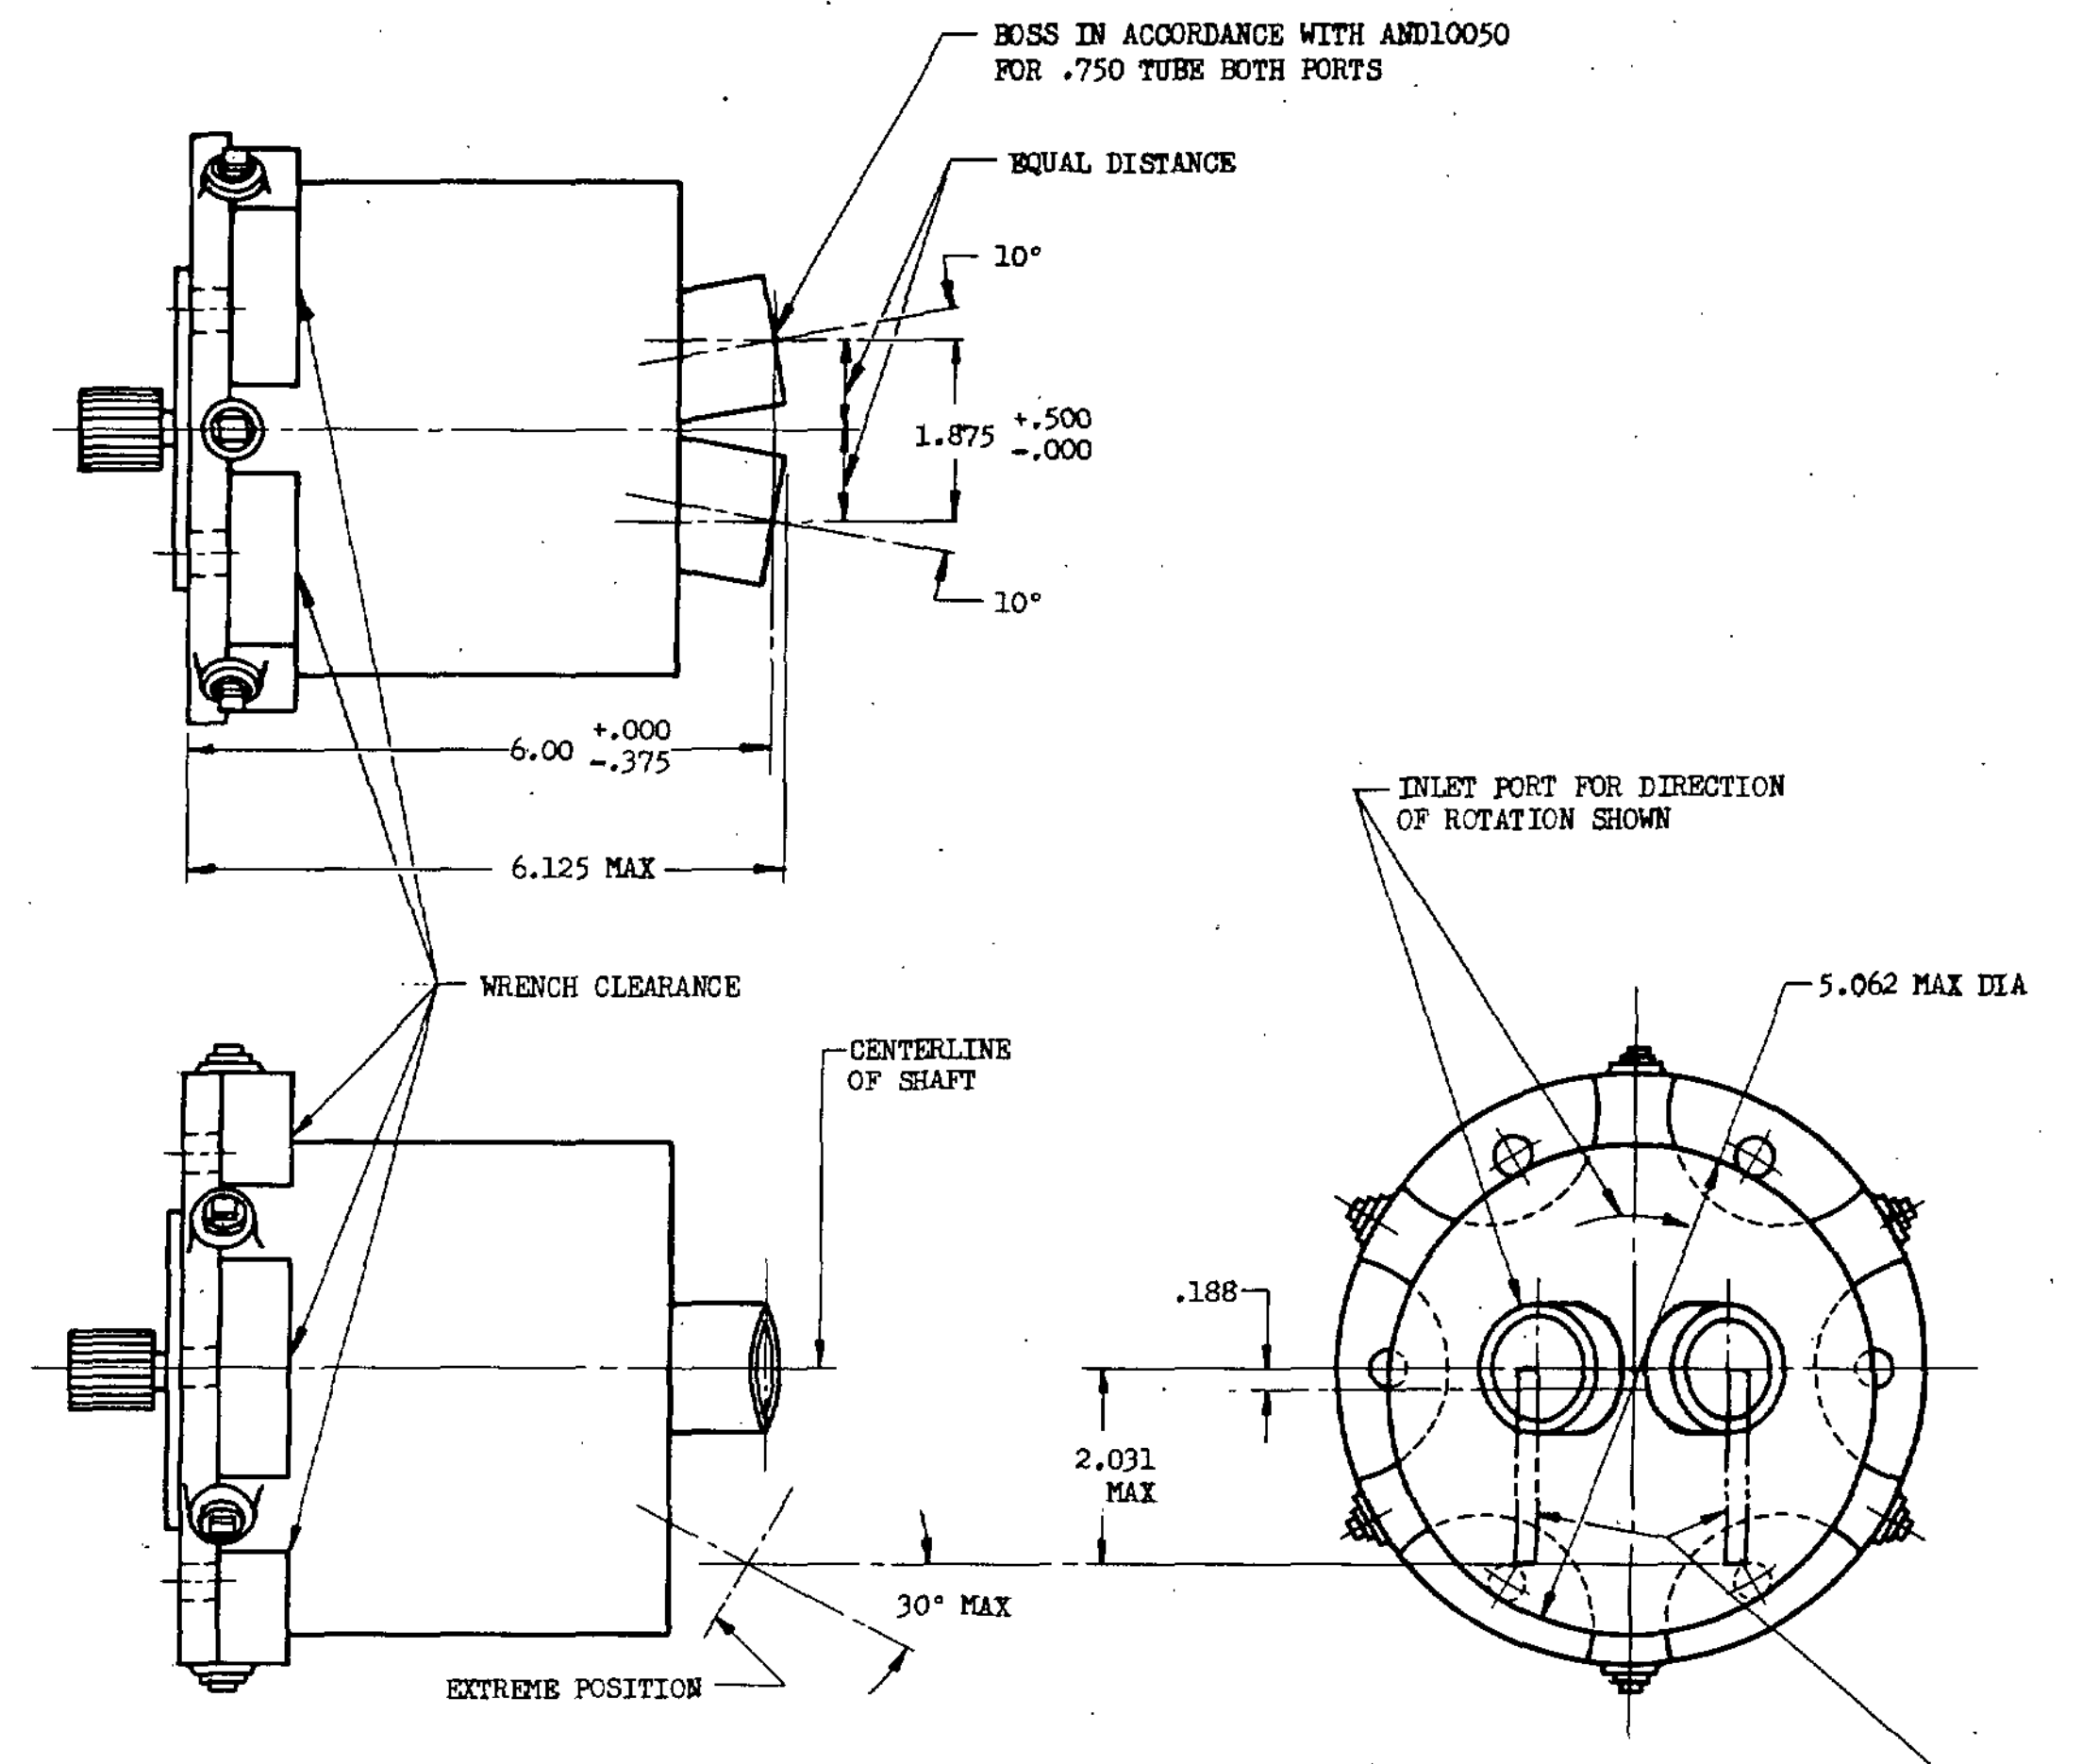

POSITION OF PORTS AS SHOWN IS PREFERRED BUT THEY MAY BE CENTERED AT ANY POINT WITHIN THESE RECTANGLES (2.031 x .250) PROVIDED THEY ARE LOCATED ON A COMMON ℄ AS SHOWN. ALSO THE LONGITUDINAL AXIS OF PORTS MAY BE INCLINED 0° TO 30° IN A VERTICAL PLANE FROM ℄ OF SHAFT AND IN THE DIRECTION SHOWN

AN PART NO.	TYPE OF DRIVE (REF DWG)
AN4149-1	AND20002, TYPE XII-J

FLANGE THICKNESS .38 (REF) AT MOUNTING HOLES.

MOUNTING FLANGE, DRIVE, AND WRENCH CLEARANCE DETAILS SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.02, THREE-PLACE DECIMALS ±.005, ANGLES ±.5°.

THE AIRPLANE OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.

① INACTIVE FOR DESIGN AFTER 25 MAY 1967. NO SUPERSEDING STANDARD.

APPROVED 4 Oct 48 : REVISED ① 25 May 67

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN4149
AN-P-11	PUMP - 3 GPM AT 3000 PSI POWER DRIVEN HYDRAULIC	

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-509/192

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.