
NAVAER 1080A (Rev. 5-51)

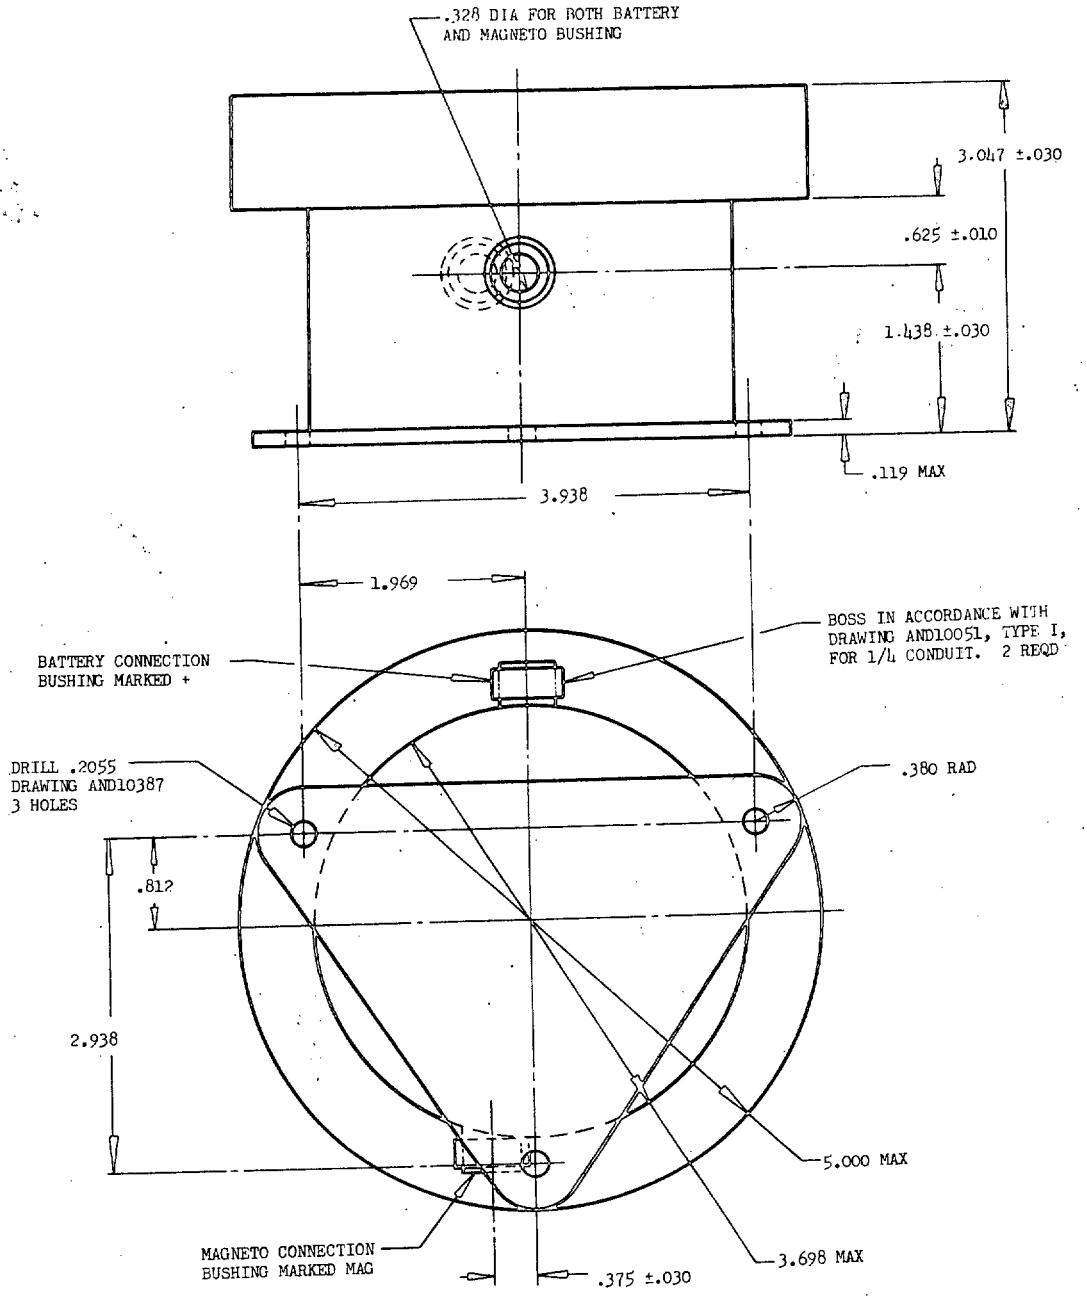

	AN PART NO.	INPUT CURRENT, AMPS
(a)	AN4181-1	2.7 ±.2
(a)	AN4181-2	4.0 ±.2
(a)	AN4181-3	NOT TO EXCEED 4.2

(4) (a) PART NUMBERS AN4181-2 AND AN4181-3 ARE INTERCHANGEABLE AND MAY BE USED IN ALL SYSTEMS.

WEIGHT: 1.75 POUND MAXIMUM.

MAINTAIN .12 CLEARANCE ON MOUNTING HOLES FOR SCREW HEADS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.

THIS VIBRATOR IS INHERENTLY RADIO-INTERFERENCE SUPPRESSED AND REQUIRES NO EXTERNAL FILTER.

APPROVED 22 Jun 49 REVISED (1) 10 Dec 51 (2) 1 Jul 55 (3) 19 Mar 56 (4) 29 Jul 59

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by Joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN4181
MIL-V-5635	VIBRATOR, AIRCRAFT ENGINE STARTING, RADIO-INTERFERENCE SUPPRESSED	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:21Z
Check the source to verify that this is the current version before use.

U. S. GOVERNMENT PRINTING OFFICE 949706