

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


NOTE: This standard was approved by joint action of the Air Force and Navy Departments on the Air Force-Navy standard for this product. This standard supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, as far as new designs, not later than 6 months after the latest date of approval shown.

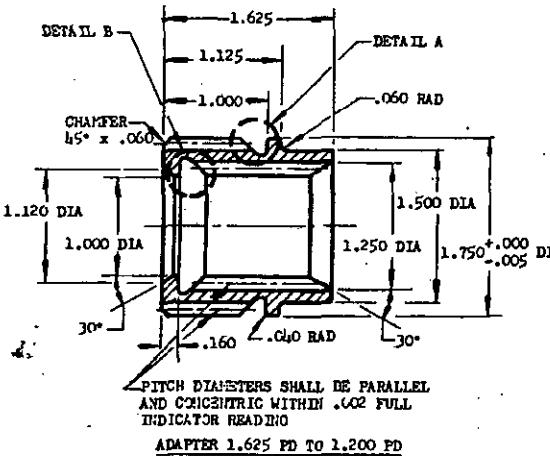


ADAPTER 1.625 PD TO 1.200 PD

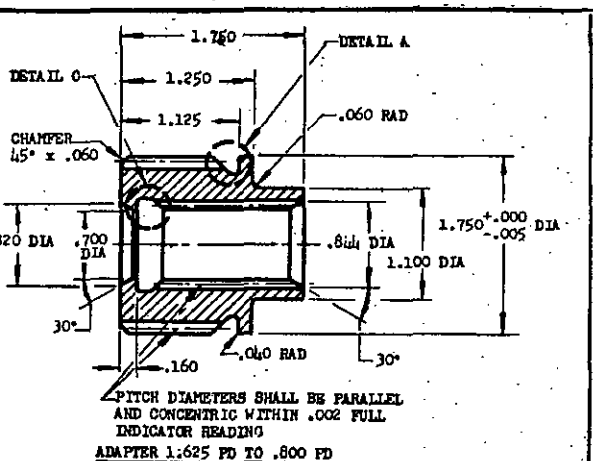


ADAPTER 1.625 PD TO .800 PD

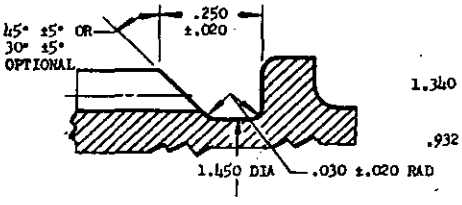


DETAIL A

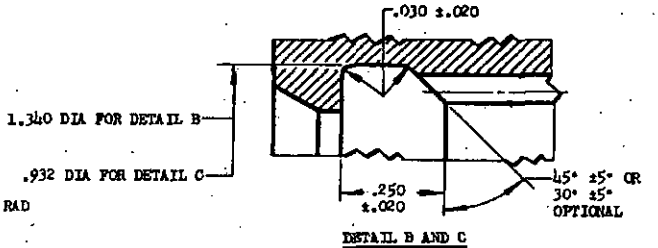


DETAIL B AND C

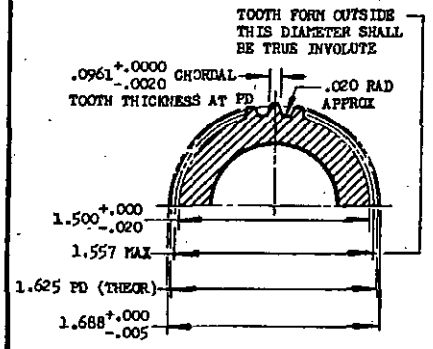

EXTERNAL SPLINE DETAIL
EXTERNAL SPLINE DATA
26 TEETH
16/32 PITCH
30° PRESSURE ANGLE

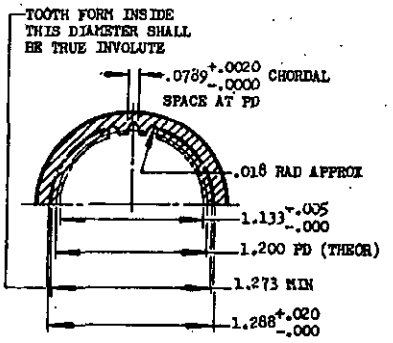

INTERNAL SPLINE DETAIL
INTERNAL SPLINE DATA
24 TEETH
20/30 PITCH
30° PRESSURE ANGLE



INTERNAL SPLINE DETAIL
INTERNAL SPLINE DATA
16 TEETH
20/30 PITCH
30° PRESSURE ANGLE

AN PART NO.	1.625 PD CONVERTED TO:
AN4182-1	.800 PD
AN4182-2	1.200 PD

MATERIAL: STEEL, AN-S-13, AMS6260 OR EQUIVALENT STEELS HAVING SAME PHYSICAL PROPERTIES.
CASE HARDNESS, ROCKWELL C58 MINIMUM OR EQUIVALENT
CORE HARDNESS, ROCKWELL C30 MINIMUM
STEEL, AN-S-19, COMPOSITION A OR EQUIVALENT STEELS HAVING SAME PHYSICAL PROPERTIES.
CASE HARDNESS, ROCKWELL C64 MINIMUM OR EQUIVALENT.
CORE HARDNESS, ROCKWELL C22 MINIMUM

CASE HARDENING OF SURFACES OTHER THAN SPLINE IS OPTIONAL. MINIMUM DEPTH OF EFFECTIVE CASE .010.
ANGULAR RELATIONSHIP OF INTERNAL SPLINES TO EXTERNAL SPLINES IS UNIMPORTANT.
REMOVE ALL BURRS AND SHARP EDGES.
ALL DIAMETERS MUST BE CONCENTRIC WITHIN .010 FULL INDICATOR READING UNLESS OTHERWISE SPECIFIED.
NOMINAL USE TO CONVERT 1.625 PD SPLINE TO 1.200 PD OR .800 PD SPLINE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE PLACE DECIMALS ±.010, ANGLES ±2°.

APPROVED 5 AUG 49 REVISED

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN4182
NONE	ADAPTER—TYPE XVII DRIVE SPLINE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:21Z
Check the source to verify that this is the current version before use.