NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE.—This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approved shown.

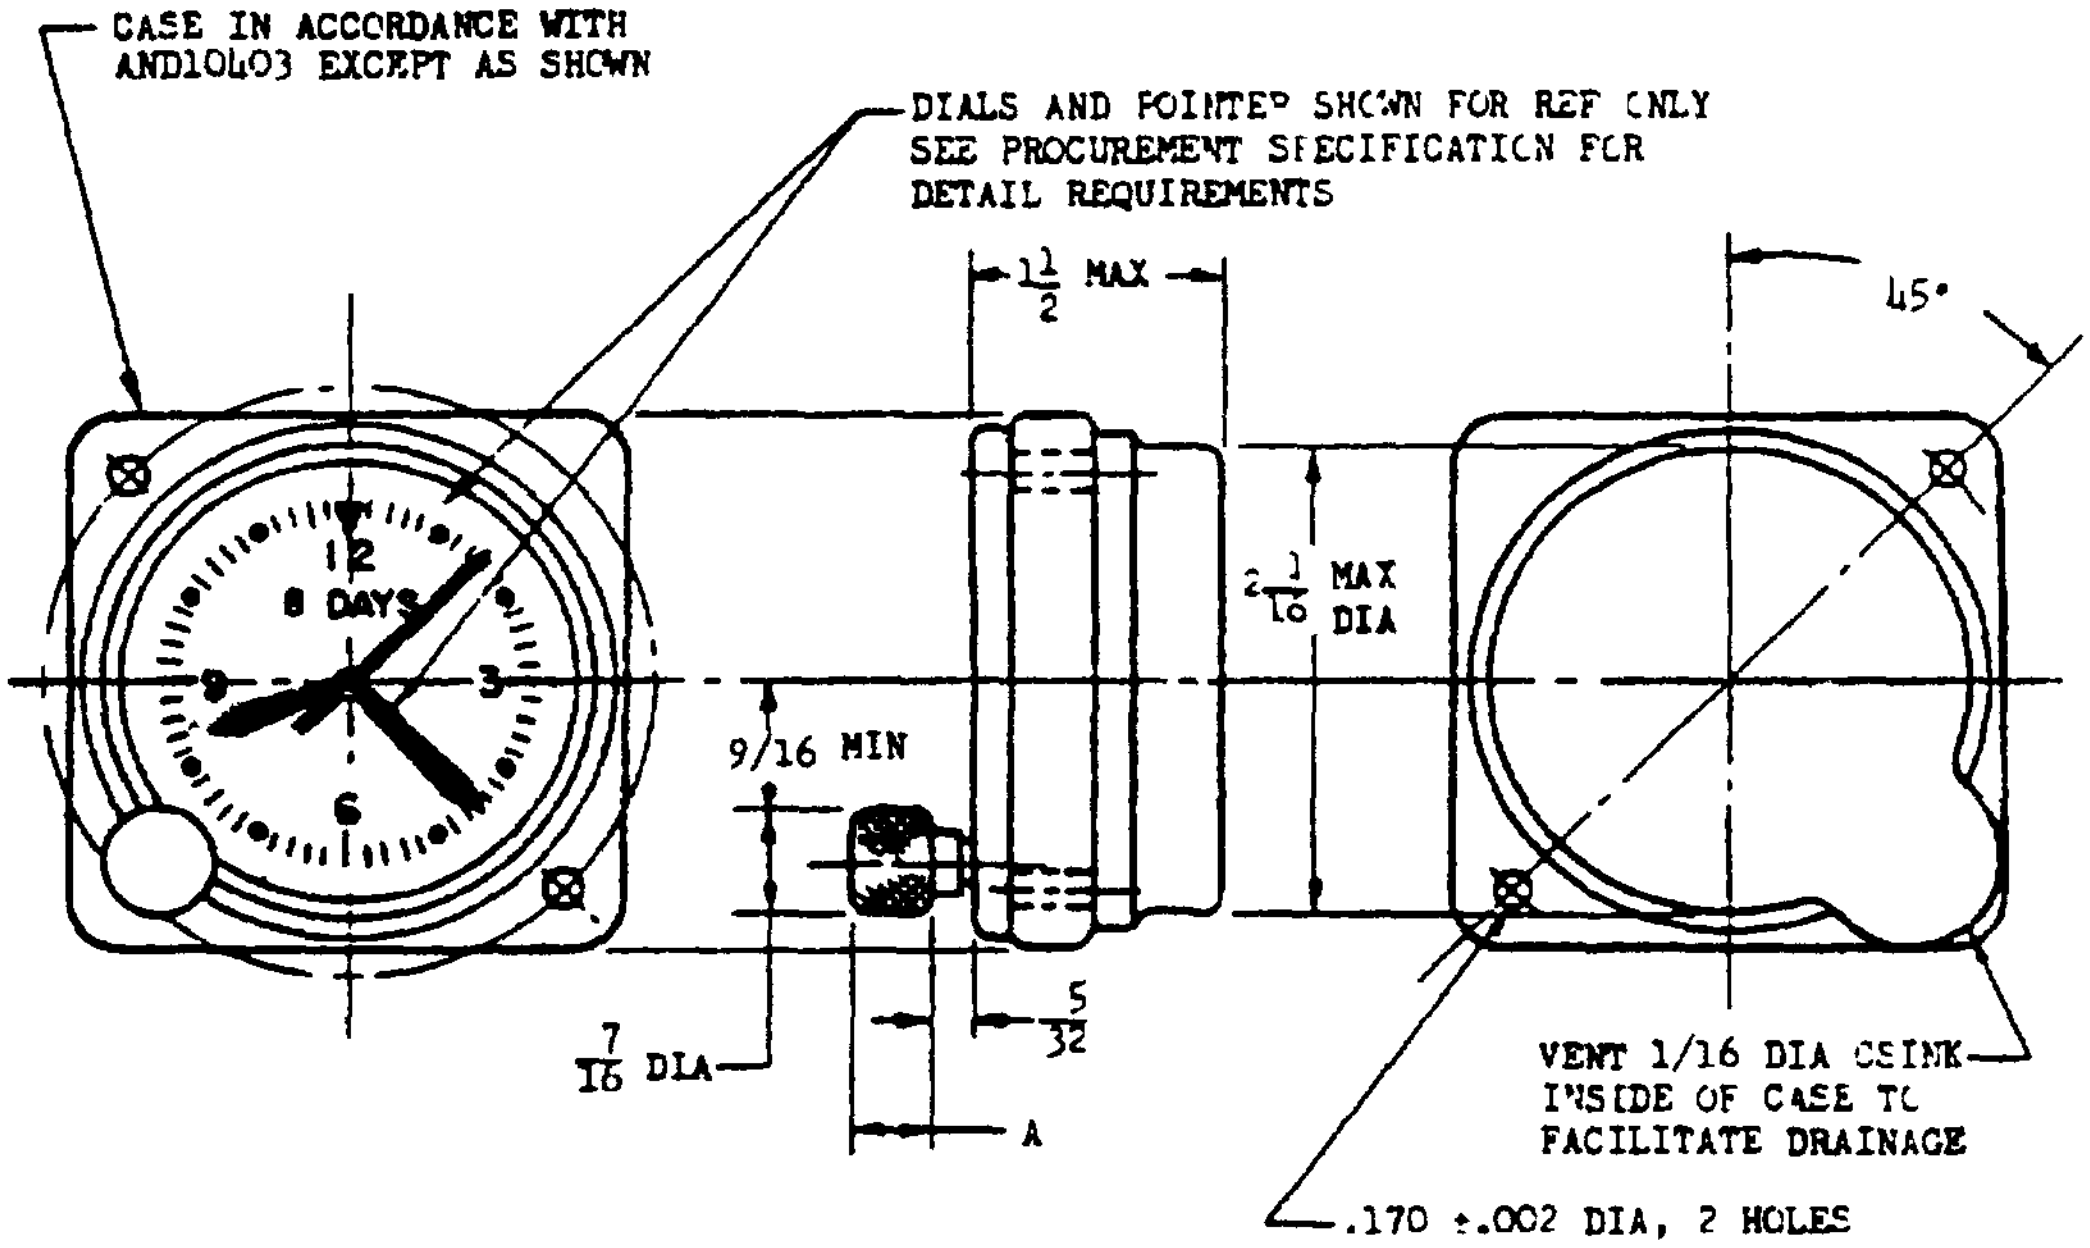
CASE IN ACCORDANCE WITH AND10403 EXCEPT AS SHOWN
DIALS AND POINTER SHOWN FOR REF ONLY SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS
$1\frac{1}{2}$ MAX
45°
12
8 DAYS
9
3
6
$2\frac{1}{16}$ MAX DIA
9/16 MIN
$\frac{7}{16}$ DIA
$\frac{5}{32}$
A
VENT 1/16 DIA CSINK INSIDE OF CASE TO FACILITATE DRAINAGE
.170 ±.002 DIA, 2 HOLES

TYPE OF KNOB	A
SHORT	5/16
LONG	11/16

AN PART NO.	KNOB TYPE	MOUNTING NUTS
AN5743-2	SHORT	NONE
AN5743L2	LONG	REMOVABLE SPRING NUTS

PREVIOUS PART NO. AN5743-1 INACTIVE FOR DESIGN AFTER 11 DECEMBER 1944. AN5743-1A REPLACES AND IS INTERCHANGEABLE WITH AN5743-1. PREVIOUS PART NO. AN5743-1A, T1A, AND L1A INACTIVE FOR DESIGN AFTER 12 MAY 1952. AN5743-2 REPLACES AN5743-1A AND T1A, AN5743L2 REPLACES AND IS INTERCHANGEABLE WITH AN5743L1A.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO 337.

③ THE MANUFACTURER SHALL FURNISH SUFFICIENT MOUNTING SCREWS FOR INSTALLING THE CLOCK THE SCREWS SHALL BE NO.6-32NC-2A ROUND HEAD, NONMAGNETIC MACHINE SCREWS, HAVING DURABLE DULL BLACK OXIDIZED OR BLACK NICKEL FINISH. THE LENGTH SHALL BE SUFFICIENT FOR MOUNTING ON A PANEL 3/16 INCH THICK.

③ SPRING NUTS SHALL BE IN ACCORDANCE WITH MIL-N-3336.
SPRING NUTS SHALL HAVE NO.6-32NC-2B THREADS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010 ANGLES ±1/2°.

APPROVED 1 Jun 43 **REVISED** ① 11 Dec 44 ② 12 May 52 ③ 13 Feb 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN5743
MIL-C-7939	CLOCK - AIRCRAFT, 1-7/8 INCH DIAL	

SUPERSEDES AIR FORCE NAVY STANDARD DRAWING AN5726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:21Z
Check the source to verify that this is the current version before use.