NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE.—This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown.

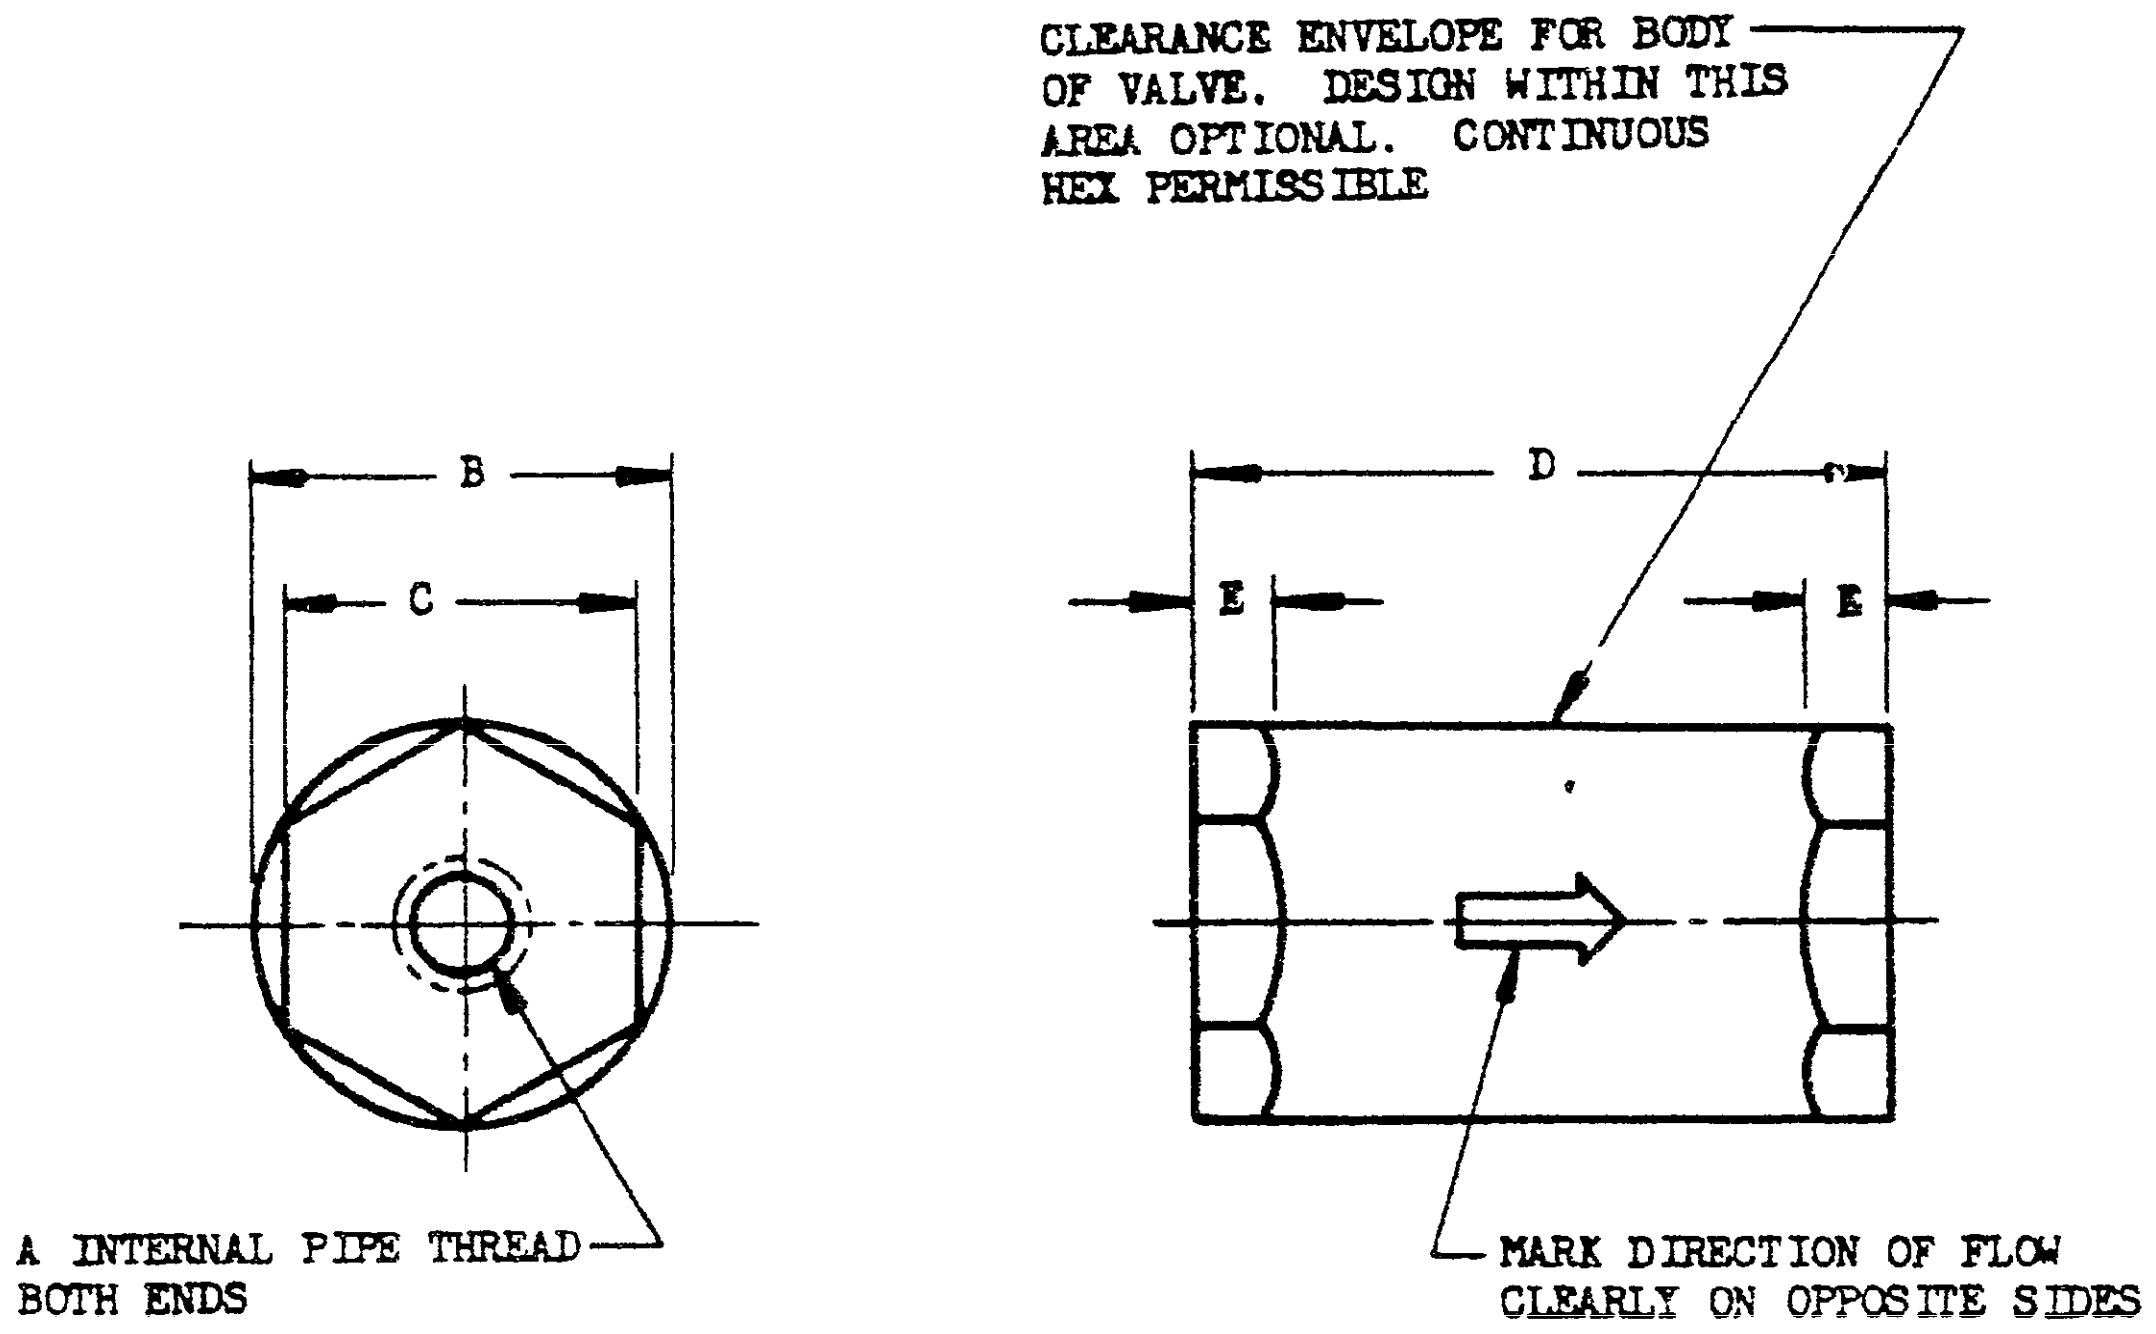
CLEARANCE ENVELOPE FOR BODY OF VALVE. DESIGN WITHIN THIS AREA OPTIONAL. CONTINUOUS HEX PERMISSIBLE
B
C
D
E
E
A INTERNAL PIPE THREAD BOTH ENDS
MARK DIRECTION OF FLOW CLEARLY ON OPPOSITE SIDES

AN PART NO.	A NPT	B MAX	C MAX	D ±1/16	E MIN	WT MAX LB	TUBING SIZE (REF) OD
AN5830-1	1/8	1-3/4	1-1/8	2-1/4	1/4	.30	1/4
AN5830-2	1/4	2	1-1/8	2-1/2	1/4	.30	3/8
AN5830-3	3/8	2	1-1/4	2-1/2	9/32	.30	1/2
AN5830-4	1/2	2-3/16	1-3/8	3	5/16	.45	5/8
AN5830-6	3/4	2-1/2	1-3/4	3-1/2	11/32	.60	3/4 and 1
(a) AN5830-8	1	2-5/8	1-7/8	3-3/4	3/8	.65	1-1/4
(a) AN5830-10	1-1/4	2-3/4	1-7/8	4	3/8	.70	1-1/2

(a) VALVES AN5830-8 AND -10 ARE INACTIVE FOR DESIGN AFTER 10 JULY 1945.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

DESIGNED FOR USE WITH AIR, COOLANTS, AND WATER AT PRESSURES NOT EXCEEDING 50 PSI.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

⑤ **INACTIVE FOR DESIGN AFTER 21 SEPT 1955.**
USE MS28050.

⑤ FUNCTIONALLY BUT NOT PHYSICALLY INTERCHANGEABLE WITH SUPERSEDING STANDARD.

APPROVED 19 Jun 42 REVISED ① 29 Jun 43 ② 10 Jul 45 ③ 27 Jan 50 ④ 2 Jun 52 ⑤ 21 Sep 55

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN5830
MIL-V-6129	VALVE - LOW PRESSURE CHECK, INTERNAL PIPE THREADS	

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:21Z
Check the source to verify that this is the currentversion before use.