INCH-POUND
MIL-DTL-3898C
1 October 2024
SUPERSEDING
MIL-D-3898B
11 April 1985

DETAIL SPECIFICATION

DRAFTING MACHINE AND SCALES GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers drafting machines and includes scales used to transfer a straight line at any angle, from any part of a drawing or chart, so that it will remain parallel to its original direction.

1.2 Classification. The drafting machines may be of the following types, classes and styles as specified (see 6.2.1).

Type I - Plotting

Class 1 - Large plotting
Class 2 - Small plotting

Type II - Drafting

Class 1 - General drafting
Class 2 - Civil engineer
Class 3 - Detailers

Style A - Band drive
Style B - Rigid bar
Style C - Parallelogram guide rod

Comments, suggestions, or questions on this document should be addressed to DLA Troop Support – Construction and Equipment (C&E) (ATTN: Code FCSB), 700 Robbins Avenue, Philadelphia, PA 19111-5096 or email CE_Standardization@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil .

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MILITARY

MIL-DTL-901	- Shock Tests, H.I. (high-Impact), Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-PRF-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys.

(See Supplement 1 for list of applicable specification sheets).

(Copies of these documents are available online at https://assist.dla.mil.)

2.2.2 Government drawings. The following Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of the solicitation.

DRAWINGS

NAVAL SEA LOGISTICS SUPPORT ENGINEERING ACTIVITY, MECHANICSBURG

9240-032	- Drafting Machine, Large Plotting, MK. 3, MOD. 4
9240-033	- Drafting Machine, Small Plotting, MK. 4, MOD. 2

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM-D5948 - Molding Plastics and Molded Plastic Parts, Thermosetting.

(Copies of this document are available from www.astm.org or ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ-Z1.4 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of this documents are available online at https://www.asq.org or the American Society for Quality, 600 North Plankinton Avenue, Milwaukee, WI 53203.)

2.4 Order of Precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, (except for related specifications sheets), the text of this specification takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification Sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheets. In the event of any conflict between requirements of this specification and the specification sheet, the latter shall govern.

3.2 First article. When specified (see 6.2.1), sample units shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material.

3.3.1. Drafting machine (less scales).

3.3.1.1 Metal parts. Unless otherwise specified; all metal parts used in the drafting machine shall be of corrosion resisting materials or other materials treated in a manner to render them adequately resistant to corrosion when tested in accordance with 4.6.2. Contact between dissimilar metals which may cause electrolytic action shall be avoided.

3.3.l.2 Plastic parts. Unless otherwise specified, plastic parts of the drafting machine shall conform to type CFl-20 of ASTM-D5948.

3.3.2 Scales. Scales shall conform to the material requirements as specified in the applicable specification sheet (see 3.1).

3.4 Design.

3.4.1 Type I - plotting.

3.4.1.1 Class 1 - large plotting. The type I, class 1 drafting machine shall be in accordance with the requirements specified on Drawing 9240-032.

3.4.1.2 Class 2 - small plotting. The type I, class 2 drafting machine shall be in accordance with the requirements specified on Drawing 9240-033.

3.4.2 Type II - drafting. The type II drafting machine shall be in accordance with the best commercial practices for drafting machine design to insure versatility and accuracy in operation with a minimum amount of effort. The drafting machine shall be furnished in style A, B or C as specified (see 6.2,1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

3.4.2.1 Protractor. The drafting machine protractor shall have a means provided tor setting the azimuth (baseline or zero position of the protractor head) independently of the parallel motion device throughout 360 degrees. The protractor markings shall be graduated as specified herein and shall be oriented with 0 degree marking at the right horizontal and 90 degrees marking at the top vertical when viewed from the operator's position. Each 10-degree interval shall be designated with a numeral. The numerals marking the quadrants shall be in line with the respective radial angle and be readable from the operator's position.

3.4.2.1.1. Type II, class 1 general drafting machine protractor. The type II, class 1 general drafting machine protractor shall be graduated in single degree markings from 0 to 90 degrees. Numerals shall be in a single row on the protractor by quadrants. A double vernier graduated to read to 5 minutes of arc shall be provided with numerals designating each 15 minutes on the vernier.

3.4.2.1.2 Type II, class 2 civil engineer drafting machine protractor. The Type II, class 2 civil engineer drafting machine protractor shall be graduated in 1/2 marking degrees markings. Numerals shall be in two rows of figures, one by quadrants and one from 0 to 360 degrees. The 0 to 360-degree numerals shall be marked in 10-degree intervals with the top of the numeral toward the center point. A double vernier graduated to read 1 minute of arc shall be provided with numerals designating each 15 minutes on the vernier.

3.4.2.1.3 Type II, class 3 detailers drafting machine protractor. The Type II, class 3 detailers drafting machine protractor shall be graduated in single degree markings from 0 to 90 degrees. Numerals shall be in a single row on the protractor by quadrants. A double vernier graduated to read 5 minutes of arc shall be provided with numerals designating each 10 minutes on the vernier.

3.4.2.2 Parallel motion device.

3.4.2.2.1 Style A band drive drafting machine. The style A band drive drafting machine obtains parallel motion through the use of continuous one-piece steel bands passing over the pulleys. The bands shall be easily replaceable in in the event of breaking. The bands shall have protective cover to avoid injury to the operator. Means shall be provided for easy adjustment of the band tension.

3.4.2.2.2 Style B rigid bar drafting machine. Style B rigid bar drafting machine obtains parallel motion through the use of a rigid bar or vertical rail suspended from a horizontal carriage for supporting the protractor head. The bars shall he easily replaceable in the event of damage. Means shall be provided for independently locking the horizontal and vertical motion of the machine. Means shall be provided for adjustment of horizontal and vertical accuracy.

3.4.2.2.3 Style C parallelogram guide rod drafting machine. Style C parallelogram guide rod drafting machine obtains parallel motion through the use of guide rods so arranged as to function in the manner of a parallelogram. The guide rods shall be easily replaceable in the event of damage.

3.4.2.3 Scale arm. The design of the scale arm for the Type II drafting machine shall be such as to hold two scales at 90 degrees to each other. The scale arm shall be resilient yet hold the scales firmly and allow the scale to be quickly and easily removed. The chuck end of the scale arm shall be capable of receiving and retaining chuck plate as specified in MIL-D-3898/1.

3.4.2.4 Adjustments.

3.4.2.4.1 Protractor head. The protractor head shall be capable of being adjusted or locked by means of a positive clamping mechanism, in any desired position in azimuth either with or independently of the scale arm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

3.4.2.4.2 Micrometer adjusting screw. When specified (see 6.2.1), a Type II, class 2 drafting machine shall be supplied with a micrometer adjusting screw to provide for fine adjustment of angles after the instrument has been oriented.

3.4.2.5 Automatic indexing. The Type II, class 1 and 3 drafting machines shall provide for positive locking of the protractor arm at either a 3- or 15- degree position as specified (see 6.2.1), throughout the entire circle. Indexing shall be by means of a detent action or similar indexing or escapement action allowing for free rotation and setting of intermediate angles. If index detent is positioned at the right horizontal of protractor head, the 0-degree marking on protractor (see 3.4.2.1) may be located up to 20 degrees above or below right horizontal position.

3.4.2.6 Anchor. The anchor for the drafting machine shall be of simple design to permit the drafting machine to be easily mounted in a positive manner by being screwed, bolted, or clamped in place or suspended from a track mounted on the full length of the top of the board. The anchor shall permit the drafting head to be raised to a height of at least 4 inches from the board. Means shall be provided for securely attaching the anchor or carriage to either a wooden or metal table or board as specified (see 6.2.1).

3.4.2.7 Arm size. The drafting machine shall be furnished in one of the following sizes as specified (see 6.2.l).

Type II, classes 1 and 2 - 24 - , 30 -, or 36-inch arms.
Type II, class 3 - 16 - or 18-inch arms.

3.4.2.8 Counterbalancing. When specified (see 6.2.1), means shall be provided for counterbalancing the drafting machine when used on a steep inclined board or table,

3.4.3 Scales. The drafting machine scales shall be in accordance with the applicable specification sheet (see 3.1).

3.4.3.1 Graduations and markings. Scales shall have graduations and markings conforming to the arrangement, size and tolerances as specified herein and on the applicable specification sheet (see 3.1) when examined in accordance with 4.3.2.1. Graduations and markings shall be stamped, engraved or molded and shall be 0.015-inch deep by 0.010-inch wide. Unless otherwise specified (see 6.2.1) letters and numerals shall be 5/64-inch high. Graduations and markings shall be black except as specified herein. The marking material shall be insoluble in water in and shall bond or fuse permanently to the scale. Graduations and markings or plastic scales shall be on the underneath side in order that they may be correctly read from the top side of the scale. The graduations on plastics scales shall be protected from abrasion and wear and wear by either a 0.005-inch transparent plastic lamination or raising the under surface of the edge 0.005-inch minimum so that they will be clear of the drawing surface.

3.4.3.1.1 Range-time-speed plotting scale. The graduations and markings on the scales (see MIL-D-3898/6) shall be black, except that the inner row (reciprocal scale) of numerals on the yards scale shall be magenta in color.

3.4.3.1.2 Tolerances. Tolerances for spacing of all graduations shall apply at a temperature of 23 degrees Celsius (°C) and relative humidity of 50 percent.

3.4.3.1.2.1 Aluminum. Spacing between all graduations less than 1-inch apart shall be within plus or minus 0.002-inch of that specified. Spacing between graduations more than 1-inch apart shall be within plus or minus 0.008-inch per foot of graduation.

3.4.3.1.2.2 Plastic and boxwood. Spacing between all graduations less than 1-inch apart shall be within plus or minus 0.005 inch of that specified. Spacing between graduations more than 1-inch apart shall be within plus or minus 0.015 inch per foot of graduation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

3.4.3.1.3 Identification markings. The scale shall be marked with the applicable part number on the underside of the scale at the location specified on the applicable specification sheet. Markings shall be stamped, engraved or molded in order that they may be correctly read from the underside of the scale. Letters and numerals shall be 1/16-inch high and filled with permanent black paint.

3.4.3.2 Material protection.

3.4.3.2.1 Aluminum. Aluminum scales shall be protected with an anodic coating in accordance MIL-PRF-8825.

3.4.3.2.2 Boxwood. Boxwood scales shall be faced with suitable white plastic.

3.5 Performance.

3.5.1 Parallelism. The drafting machine shall maintain parallelism within 0.08-inch over an 18-inch length when tested in accordance with 4.5.1.2.1.

3.5.2 Automatic indexing. The automatic indexing of type II, class 1 and 3 drafting machines shall be accurate within plus or minus 10 minutes at each of the detent positions (see 3.4.2.5) when tested in accordance with 4.5.1.2.2.

3.5.3 Protractor accuracy. The accuracy of the protractor shall be within plus or minus 10 minutes when tested in accordance with 4.5.1.2.3.

3. 5. 4 High impact shock. The Type I drafting machine shall display no hazard to personnel, and meet the requirements specified herein, after testing in accordance with 4.6.1.

3.6 Physical characteristics.

3.6.1 Scale flatness. The deviation from flatness shall not exceed 0.060 inch at the center of the scale when tested in accordance with 4.5.2.2.1.

3.6.2 Scale edges. Ruling edges of the scale shall be smooth, straight, and parallel within 0.01 inch when tested in accordance with 4.5.2.2.2 and 4.5.2.2.3.

3. 7 Storage. The drafting machine, less scales, shall show no evidence of damage affecting serviceability or appearance when subjected to a temperature of plus 71°C and minus 62°C in accordance with storage tests specified in 4.6.2.

3.8 Accessory equipment.

3.8.l Tools. Each drafting machine will be furnished with any special tools required for scale removal or any additional special tools needed to make adjustments to the drafting machine,

3,8.2 Carrying or storage case. Unless otherwise specified (see 6.2.1), each drafting machine shall be furnished with a carrying or storage case. The case shall be a hardwood or metal case fitted with necessary securing chocks to receive and hold securely the instrument and accessories.

3.9 Marking. The drafting machine and carrying case shall have the following marking permanently attached. The marking shall be either directly engraved or shall be suitably reproduced on a separate plate:

(a) Drafting machine MIL-DTL-3898.
(b) Type____ class____ style.
(c) Name of contracting activity.
(d) Manufacturer's name.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

(e) Contract no.
(f) Year.
(g) U.S.

3.10 Manuals. Each drafting machine shall be furnished with operating instructions in accordance with the contractor's standard instruction literature for similar equipment.

3.11 Workmanship. Workmanship shall be in accordance with good commercial practices for this type of product and shall be free from nicks, scratches and burrs.

4. VERIFICATION

4.2 Classification of inspection. The inspections specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall consist of the examination and tests specified in 4.5 and 4.6.

4.3.1 First article inspection report. A first article test report shall be provided in accordance with the data ordering document (see 6.2.2).

4.4 Conformance inspection. Conformance inspection shall consist of a sample number of complete machines (with scales) or of scales only selected in accordance with 4.4.1 and shall be subjected to the examinations and tests specified in 4.5.

4.4.1 Sampling for conformance inspection.

4.4.1.1 Complete machines (with scales).

4.4.1.1.1 Inspection lot. Drafting machines of the same type and style, complete with case if applicable, offered for delivery at one time, shall be considered a lot for purposes of acceptance inspection.

4.4.1.1.2 Sampling for examination. A random sample of machines shall be selected from each inspection lot by the inspector in accordance with inspection level II of ASQ-Z1.4. The acceptable quality level (AQL) shall be 1.5 percent defective.

4.4.1.1.3 Sampling for tests. A random sample of machine shall be selected from each inspection lot in accordance with inspection level S-3 of ASQ-Z1.4. The AQL shall be 1.5 percent defective. Machines, and if applicable, the cases in the sample, shall be subjected to the tests specified in 4.5.1.

4.4.1.2 Scales only.

4.4.1.2.1 Inspection lot. Scales offered for delivery at one time shall be considered a lot for purposes of inspection.

4.4.1.2.2 Sampling for examination. A random sample of scales shall be selected from each lot in accordance with ASQ-Z1.4 at inspection level II. The AQL shall be 1.5 percent.

4.4.1.2.3 Sampling for tests. A random sample of scales shall be selected from each lot in accordance with ASQ-Z1.4 at inspection level II. The AQL shall be 1.5 percent defective. Scales in the sample shall all be subjected to the tests specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

4. 5 Examination and test procedures. Each of the sampled equipment shall be examined or tested as specified herein to verify compliance with this specification. Any equipment in the sample containing defects shall be rejected, and if the number of defective equipment in the sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.5.1 Drafting machine and scales.

4.5.1.1 Examination. Each sample selected in accordance with 4.4.1.1. 2 shall be given a visual and dimensional examination.

4.5.1.2 Tests. Samples for tests shall be selected in accordance with 4.4.1.1.3.

4.5.1.2.1 Parallelism test. Attach the drafting machine to a drafting board of sufficient size to construct the lines shown on figure 1 on a sheet of drawing paper. The machine is to be attached and operated in the manner as is intended for normal use. The machine shall have an 18-inch scale, which meets all the provisions of this specification, attached to the horizontal scale arm of the machine. Align and lock the scale arm in a horizontal position with one of the witness points aligned with the 0 degree protractor marking. Release the protractor lock and rotate the scale arm 90 degrees counterclockwise such that the scale is in a vertical position. Using a sharp pencil, mark the paper at the 0- and 18-inch scale graduation points. Identify the mark closest to the protractor head as "A". Release the protractor lock and rotate the scale arm clockwise 90 degrees, such that the scale is returned to the original horizontal position. Draw a horizontal line from point: "A" for a length of 18 inches and mark the end of the line as "B". Draw a horizontal line 18 inches above line "AB" through the previously marked point. Release the protractor lock and rotate the scale arm counterclockwise 90 degrees, such that the scale is in the vertical position. Draw vertical lines upward from points "A" and "B" through the upper horizontal line and label the intersection points "C" and "D", respectively. Measure lines "BD"' and "CD" to the nearest 0.01 inch. If the length of either line "BD" or "CD" is longer than 18.08 inches or shorter than 17.92 inches, the drafting machine shall be considered defective.

4.5.1.2.2 Indexing accuracy. Drafting machines equipped with either a 3- or 15-degree automatic indexing feature shall be secured to a drafting table and tested as follows: Mount both scales in the scale arm and adjust the scales so that the angle between lines drawn along the edge of the scales is 90 degrees. By means of the indexing mechanism, draw a line every 3- or 15-degrees within the 90 degree angle; check for accuracy of each angle so constructed. The angles shall he accurate to within plus or minus 10 minutes.

4.5.1.2.3 Protractor accuracy. The protractor shall be secured to a drafting table and tested as follows: The protractor shall be set for a pre-determined baseline setting and a line drawn at this setting. Rotate the scale clockwise or counterclockwise through 45 degrees either side of the baseline and check the respective angles for accuracy. The accuracy of the angles shall be within plus or minus 10 minutes.


4.5.2 Scales only.

4.5.2.1 Examination. Each sample selected in accordance with 4. 4. 1. 2. 2 shall be given a visual and dimensional examination. To determine conformance to 3.4.3.1, the spacing of the graduation lines shall be checked by means of a pair of dividers and a graduated test bar of known accuracy.

4.5.2.2 Tests. Samples for tests shall be selected in accordance with 4.4.1.2.3.

4.5.2.2.1 Scale flatness test. The degree of flatness of the scales shall be tested by placing the underside of the scale upon a firm, level, nonresilient surface and determining the degree of longitudinal bow by means of a feeler gage. No weights shall be applied to the scales during this test. If the degree of longitudinal bow exceeds the limits specified in 3.6.1, the scale shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

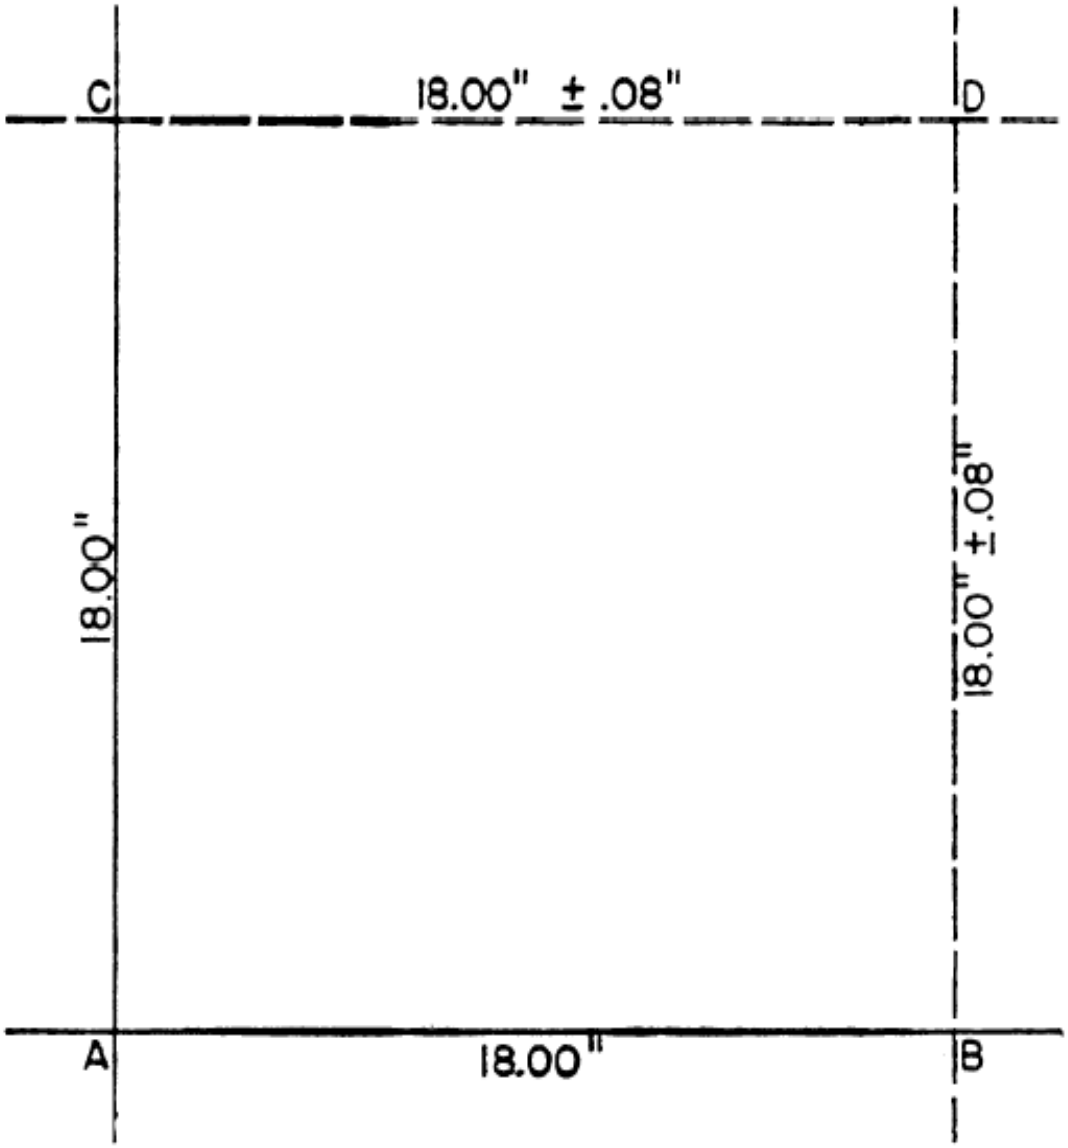

SH 131817

FIGURE 1. Parallelism test diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

4.5.2.2.2 Straightness of scale test. The straightness of scales shall be tested as follows: Securely fasten a good grade of drawing paper on the drawing board. Drive two identical pins into the drawing board, about 1/4-inch deep and spaced approximately 1/'2-inch less than the length of the scale to tested. The pins shall be driven vertically into the drawing board. Place the edge of the scale being tested against the pins and draw a line along the edge with a well-sharpened, hard-lead pencil. Rotate the scale 180 degrees, place the same edge against the other side of the pins & draw another line along the edge. Measure the distance between the two lines, at increments not exceeding 3-inches, using a shop microscope or other precision method. If the variation in distance between the two exceeds the value specified in 3.6.2, the scale shall be rejected. Repeat the above test for the opposite drawing edge of the scale.

4.5.2.2.3 Parallelism test. The parallelism of the edges of the scale shall be tested as follows: Place the scale over a piece of drawing paper with the chuck plate on the upper surface. Draw a line along each outside edge of the scale using a well-sharpened, hard-lead pencil. Remove the scale from the paper and measure the distance between the two lines, at increments not exceeding 3 inches, using a shop microscope or other precision method. If the variation in distance between the two lines exceeds the value specified in 3.6.2 the scale shall be rejected.

4.6 Tests.

4.6.1 High impact. The first article model Type I drafting machine (less scales) shall be tested in accordance with the following provisions of MIL-DLT-901:

Shockproof - Grade B
Equipment classification - Subassembly.
Classes - Class I.
Test classification - Lightweight.
Type - Type C.
Mounting - 250-pound weight shall be used with test fixture shown in figure entitled "Shock testing machine for light weight equipment".
Mode - Machine shall be attached to the test platform in the same manner as attached on a plotting table with the head in the stored position.
Disposition - Delivered in the same manner as all items on contract.
Quantity - One drafting machine.

4.6.2 Storage. The drafting machine (less scales) furnished as the first article model shall be placed in a temperature-controlled cabinet and subjected to an ambient temperature of 71 + 1.4°C, with at least 50 percent relative humidity for a period of 4 hours. The temperature shall then be gradually lowered to minus 62 + 1.4°C for a period of 72 hours. At the end of the cycle, the drafting machine shall be allowed to return to room temperature and shall be examined for defects. Presence of any defects which affect serviceability or appearance of the drafting machine shall be cause for rejection.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of material is to be performed by DoD or in-house personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Services or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Drafting machines furnished under this specification are intended for navigational plotting and drafting (special and general) applications.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title number and date of this specification.
(b) Type, class and style required (see 1.2)
(c) Quantity of items required - machines with scales or scales only.
(d) Whether sample for first article inspections is required (see 3.2).
(e) In what style general drafting machine be furnished (see 3.4.2).
(f) Whether micrometer adjusting screw is required for type II, class 2 drafting machines (see 3.4.2.4.2).
(g) Degree interval of automatic indexing (see 3.4.2.5).
(h) Whether mounting be for wooden or metal table or board (see 3.4.2.6).
(i) Arm size (see 3.4.2.7).
(j) Whether counterbalance is required (see 3.4.2.8).
(k) When letters and numerals be 5/64-inch high (see 3.4.3.1).
(l) Whether carrying case is required (see 3.8.2).
(m) Packaging requirements (see 5.1).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of FAR 52.227-7031 are invoked and the DD Form 1423 is not used, the data specified below 8hall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraph.

Paragraph no.	Data requirement title	Applicable DID no.	Option
4.3.1	First article inspection report	DI - T - 4902	---------

(Data item descriptions related to this specification and identified in section 6 will be approved and listed as such in DoD 5000.191., Vol. II, AMSDL. Copies of data items descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and For Center or as directed by the contracting officer.)

6.2.2.1 The data required of 6.2.2 and any task in section 3 or 4 of this specification required to be performed to meet a data requirement may be waived by the contracting/acquisition activity upon certification by the offeror that identical data were submitted by the offeror and accepted by the Government under a previous contract for identical item acquired to this specification. This does not apply to specific data which may be required for each contract regardless of whether an identical item has been supplied previously (for example, test reports).

6.3 First article inspection. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously acquired or tested by the Government and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.

6.4 Machine arm size. As a guide to selection of arm size, the following is the intended size arms to be used with various size drafting boards.

16-inch arms - board 24 inches by 36 inches
18-inch arms - board 27 inches by 40 inches
24-inch arms - board 36 inches by 60 inches
30-inch arms - board 42 inches by 84 inches
36-ir:ch arms - board 48 inches by 96 inches

6.5 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.6 Subject term key words listing.

Detailers
Plotting
Parallelogram guide rod

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - CR4
Navy - SH
DLA - CQ

Review activities:
Army - AT
Navy - MC

Preparing activity:
DLA - CQ

(Project 6675-2024-003)

NOTE: The activities listed above were interested in this document as of the date of document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:57Z
Check the source to verify that this is the current version before use.