MIL-C-60590(MU)
AMENDMENT 3
8 March 1968
SUPERSEDING
AMENDMENT 2
9 October 1967

MILITARY SPECIFICATION

CONTAINER, REUSABLE, SHIPPING: 10547128

This amendment forms a part of Specification MIL-C-60590(MU), dated 31 August 1966.

Paragraph 2.1: Delete: "MMM-A-132 Adhesives, Heat Resistant Airframe, Structural, Metal to Metal".

Paragraph 3.5.1.2: Delete in entirety and substitute the following:

"3.5.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the container shells with an air curable adhesive sealant, conforming to General Electric RTV 118 and Primer SCP 154, General Electric Co., Waterfor, N. Y. or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a pressure and watertight joint. Minimum cure time for sealant is twenty-four (24) hours. The extrusion edge assemblies shall be tool rolled and crimped around the periphery to assure positive attachment to container shells."

* Paragraph 3.5.4, line 2: Delete: "Grade 412 ANFFK", and substitute: "Grade 412 ABFFK".

* Paragraph 3.6.1, line 1: Delete: "interchangeable".

* Delete: "Figures 3, 4, 5, 6, 8, 9 and 10" and substitute attached "Figures 3, 4, 5, 6, 8, 9 and 10".

* The outside margin has been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A033

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3 STARTING THICKNESS- .250; COLOR-OLIVE DRAB- NO. X24087 OF FED-STD-595; FINISH-HAIRCELL GRAIN (EXTERIOR), HAIRCELL GRAIN OR SMOOTH (INTERIOR); FORMED WALL THICKNESS- .130±.020
2. TOLERANCES: FRACTIONS ±1/32, ANGLES +1°
3. SUGGESTED MATERIAL SOURCES:
   U.S. RUBBER CO., CHICAGO, ILL.
   PART NO. R40-4313-CPA1492

* MUST MATCH COVER-FIG. 4
** MUST MATE WITH COVER-FIG. 4


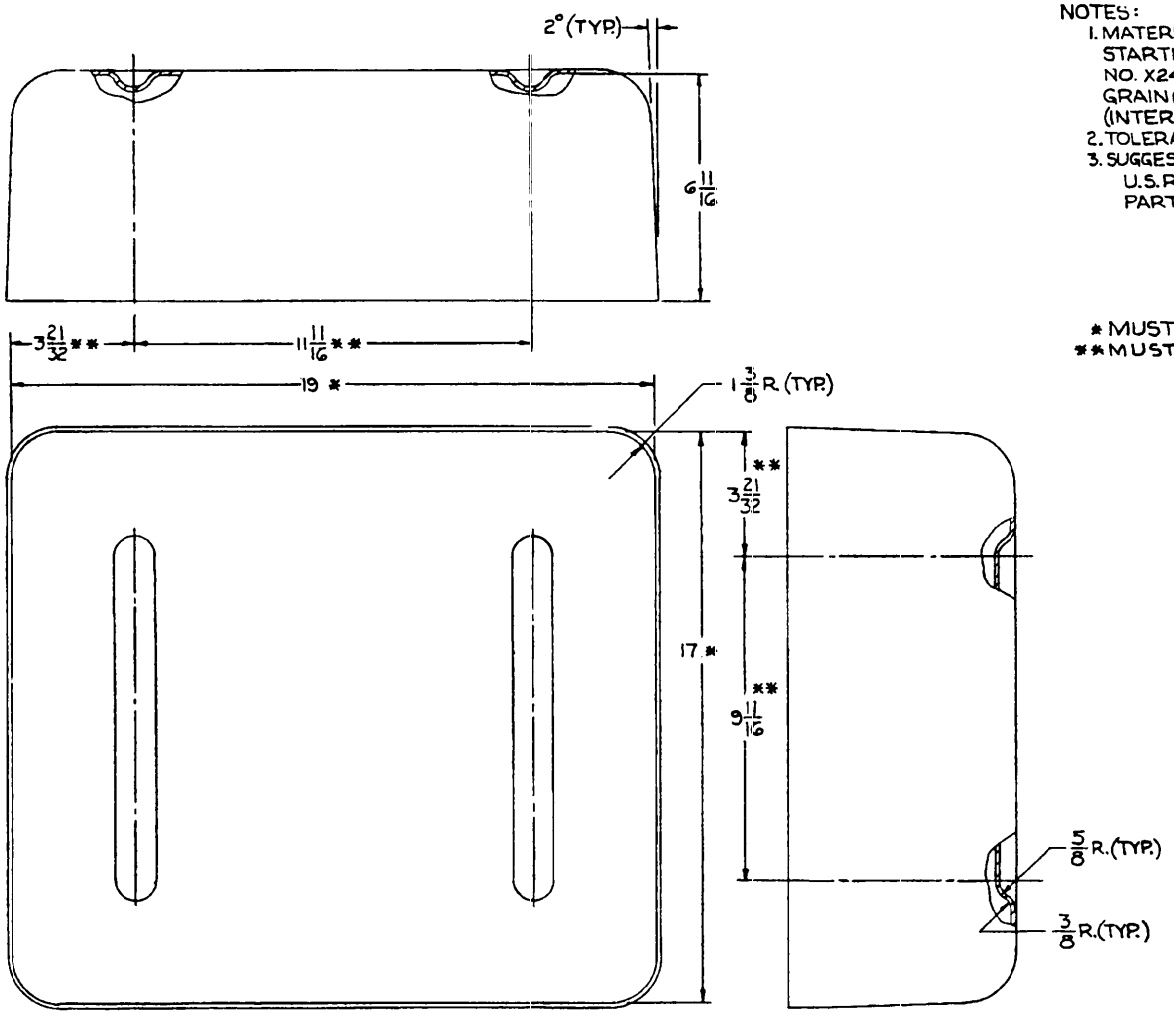


FIGURE 3-BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

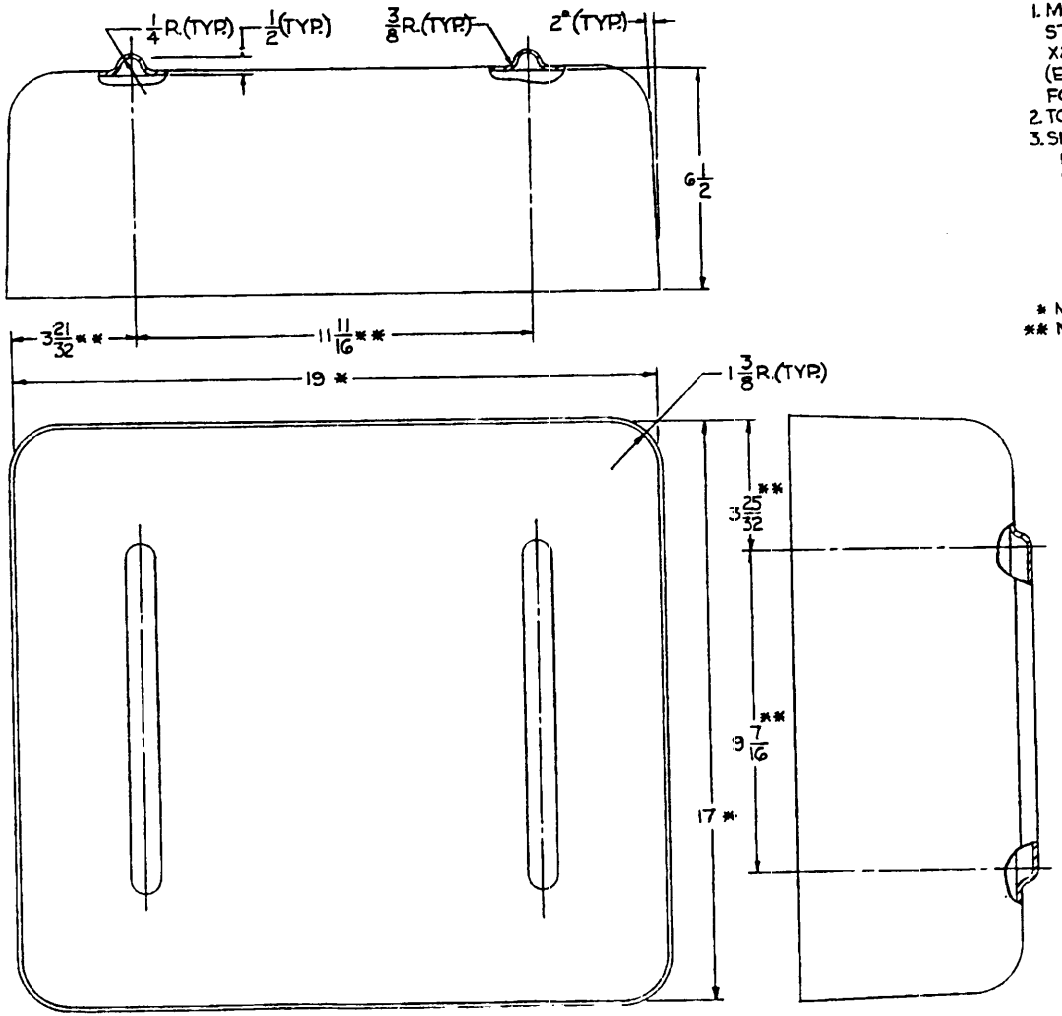


NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3 STARTING THICKNESS - .250; COLOR - OLIVE DRAB - NO. X24087 OF FED-STD-595; FINISH - HAIRCELL GRAIN (EXTERIOR), HAIRCELL GRAIN OR SMOOTH (INTERIOR); FORMED WALL THICKNESS - .130 ± .020
2. TOLERANCES - FRACTIONS ± 1/32, ANGLES ± 1°
3. SUGGESTED MATERIAL SOURCES:
   U.S. RUBBER CO., CHICAGO, ILL.
   PART NO. R40-4313-CPA 1492


* MUST MATCH BODY - FIG. 3
** MUST MATE WITH BODY - FIG. 3

FIGURE 4 - COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

NOTES:
1. COMPLETED ASSEMBLIES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN SECTION "A-A"
2. MUST MATCH SHELLS SHOWN ON FIGURES 3 AND 4
3. EDGE FRAMES SHALL BE FORMED, WELDED AND FINISHED IN ACCORDANCE WITH PAR. 3.5.1 AND 3.5.1.1

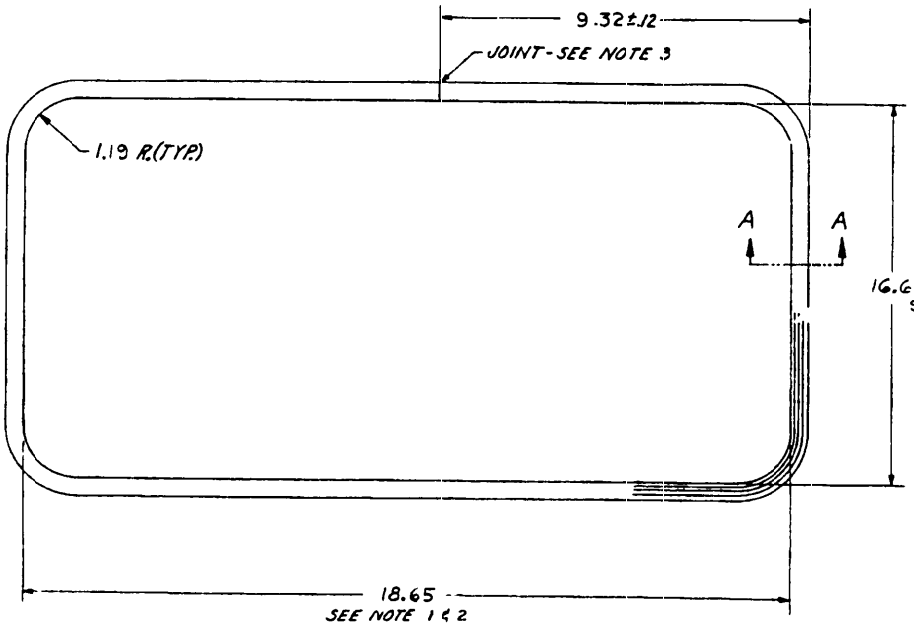

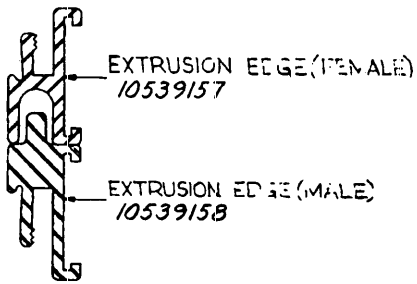

SECTION A-A

FIGURE 5 - EXTRUSION EDGE ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

NOTE:
1. CUSHIONS SHALL BE BONDED WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II.
2. CUT-OUT PROVIDED FOR CLEARANCE OF RELIEF VALVE (UPPER CUSHION ASSEMBLY ONLY).
3. HOLE SHOWN FOR LOWER CUSHION ONLY.

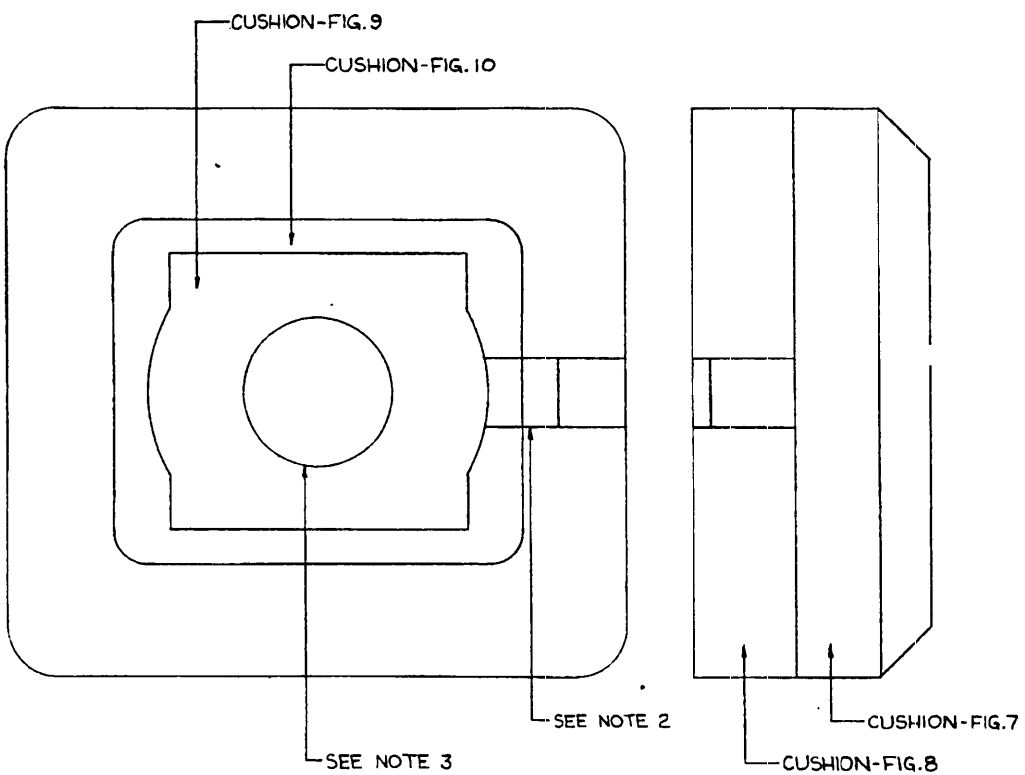


FIGURE 6-CUSHION ASSY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYURETHANE, POLYETHER FORMULATION CONFORMING TO MIL-P-26514, TYPE I, CLASS 2; DENSITY-1.8 LBS/CU.FT.; COLOR-CHARCOAL GRAY
2. TOLERANCES-FRACTIONS ±1/16
3. CUT-OUT SHOWN APPLICABLE TO UPPER CUSHION ASSEMBLY ONLY.

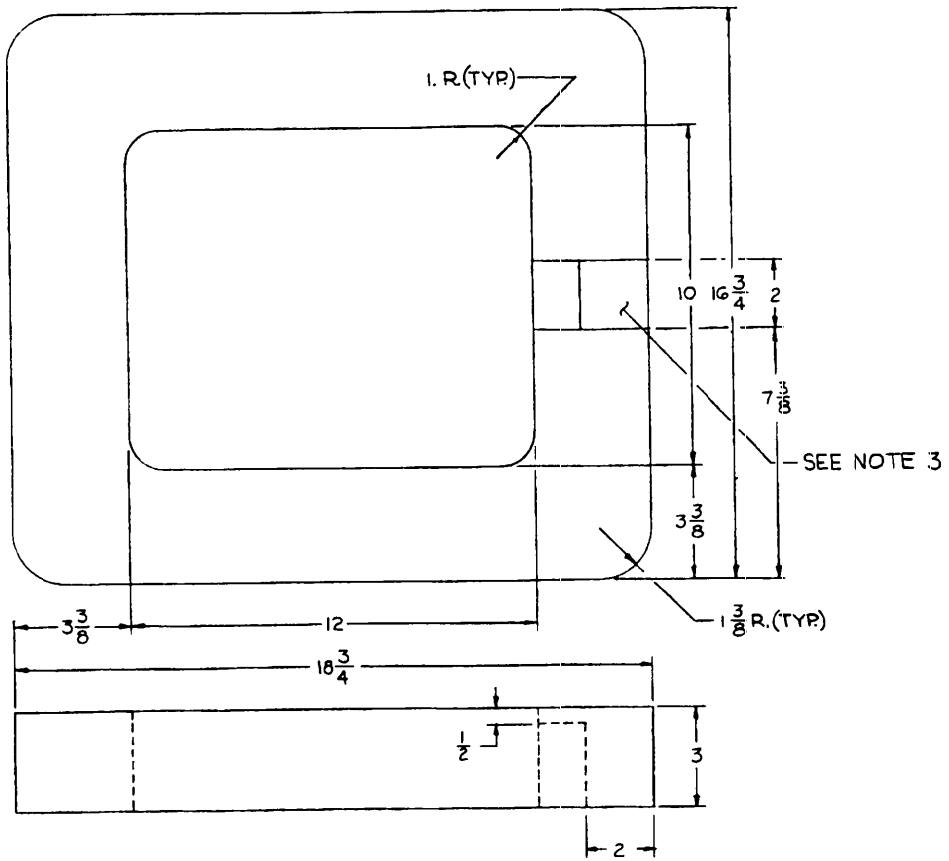


FIGURE 8-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYETHYLENE FOAM, CONFORMING TO MIL-C-46842; COLOR-CHARCOAL GRAY.
2. TOLERANCES-FRACTIONS ±1/16
3. PROVIDE IN LOWER CUSHION ASSEMBLY ONLY.
4. FOR UPPER CUSHION ASSEMBLY ONLY. BOND IN PLACE WITH ADHESIVE CONFORMING TO TYPE II OF MIL-A-5092.

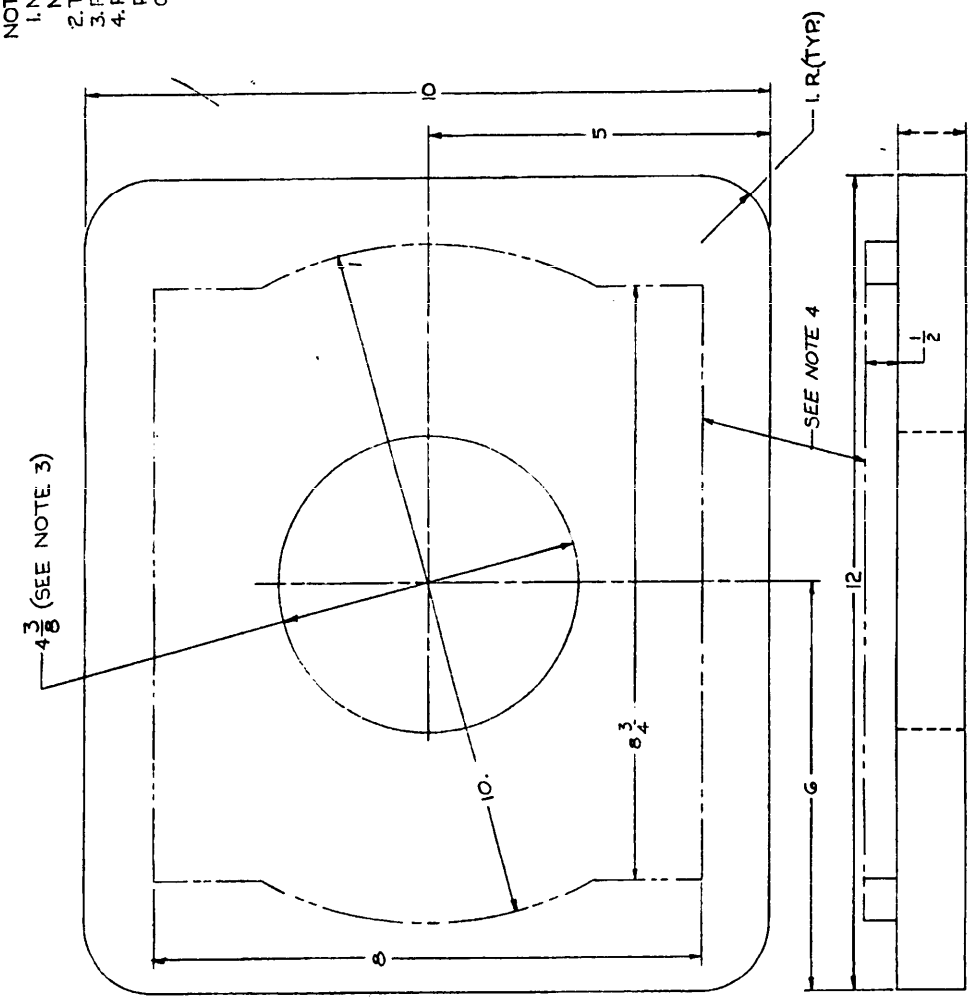


FIGURE 9-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-POLYETHYLENE FOAM CONFORMING TO MIL-C-46842; COLOR-CHARCOAL GRAY
2. TOLERANCES- FRACTIONS ±1/16
3. CUTOUT FOR UPPER CUSHION ASSEMBLY ONLY.

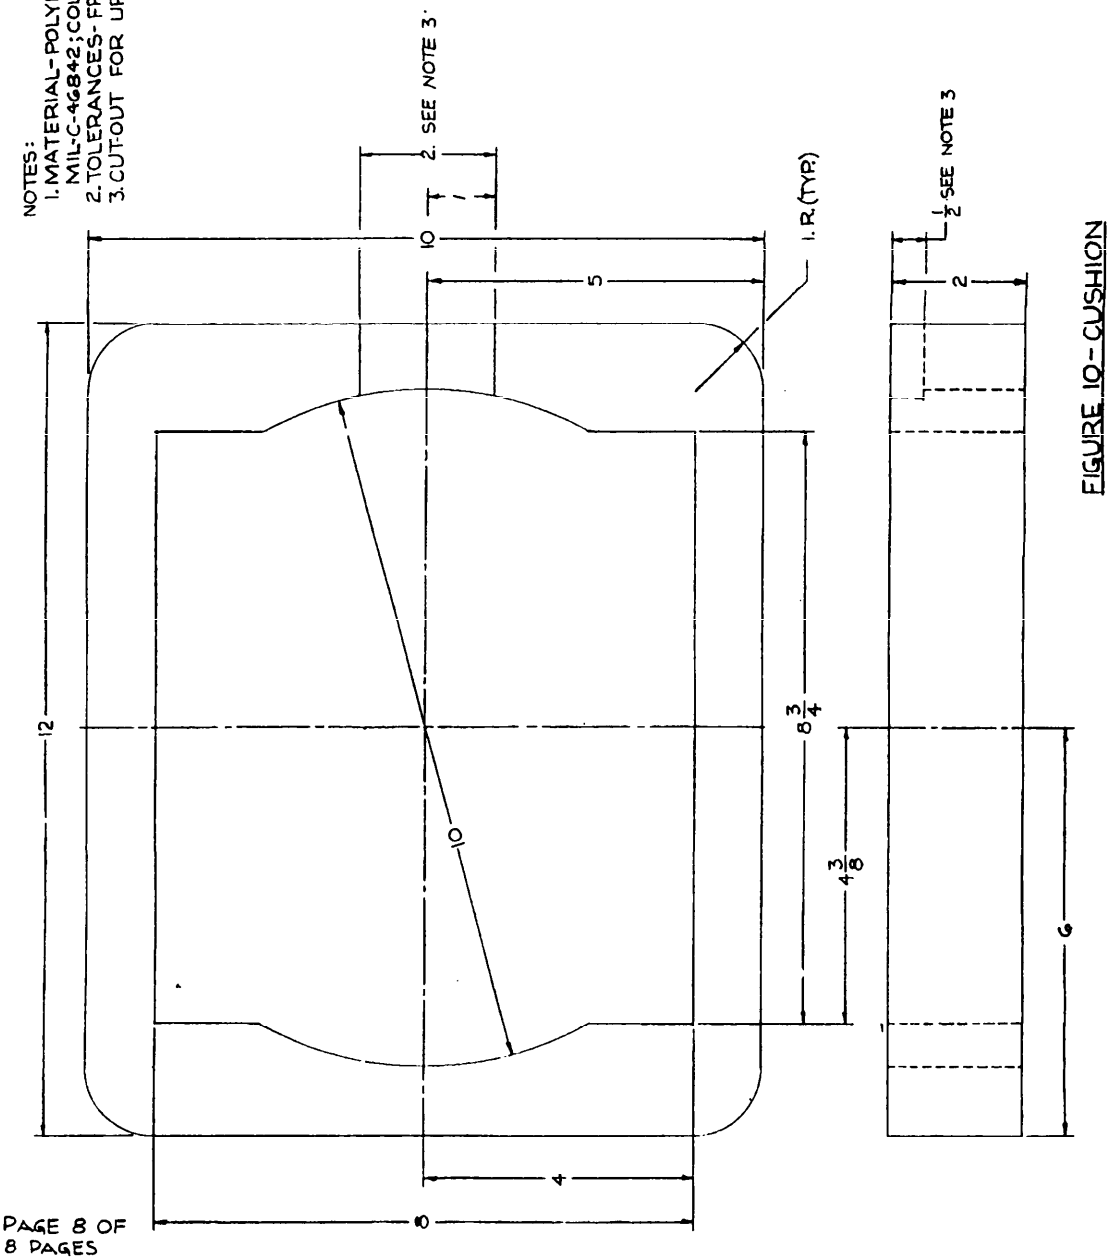


FIGURE 10-CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:46Z
Check the source to verify that this is the current version before use.