INCH-POUND

MIL-F-70807 (AR)
AMENDMENT 3
23 February 1990
SUPERSEDING
AMENDMENT 2
19 October 1988

MILITARY SPECIFICATION

FUZE, PD: M745
(LESS BOOSTER AND LEAD)

This amendment forms a part of Military Specification MIL-F-70807 (AR), dated 11 March 1988, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.2, DRAWINGS, Add "9347415 - Packing & Marking of Box Fiberboard for Fuze, Multi-Option, M734 and Fuze, PD, M745" and "9381685 - Packing & Marking of Container, M548 for Fuze, Multi-Option, M734 and Fuze, PD, M745."

PAGE 3

3.1.1: Change "458" to read "436," and change "428" to read "406."

PAGE 4

3.1.4: Delete in its entirety and substitute the following:

"3.1.4 Ballistic sample.

3.1.4.1 Initial production lot. Select at random ballistic lot acceptance samples from first production lot. Ballistic lot acceptance test plan is shown in figure 2.

3.1.4.2 Production lot. Select at random ballistic lot acceptance samples from each production lot. Ballistic lot acceptance test plan is shown in figure 3."

3.2: Change "(Figure 3)" to read "(Figure 4)."

AMSC N/A FSC 1390

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

PAGE 5

3.3: Change "-25°F" to read "-50°F"

PAGE 7

3.3.2.4: Line 4, Change "low" to read "low (-50°F)"

PAGE 10

4.4.3.1: Change "Figure 2" to read "Figure 2 and 3."

4.4.3.2: Change "Figure 2" to read "Figure 2 and 3."

4.4.3.2: Delete the last sentence of the paragraph.

PAGE 13

4.5.1.1.2.1: Delete the words "high explosive of the."

PAGE 15

4.5.1.2.1.5: Change "Test 101.3, Procedure I" to read "Test 101.2, Procedure II."

4.5.1.2.1.6: Change "Test 102.2" to read "Test 102.1."

4.5.1.2.1.7: Change "Test 103.2" to read "Test 103.1."

PAGE 17

6.2.2: Delete last sentence of paragraph.

PAGE 21

* Table I: Delete "11740827 Pad, Booster 10"
"11740828 Cap, Booster 10"

PAGE 27

4.4.2.4: Major 102, Change ".040" to read ".042."

PAGE 34

4.4.2.11: Minor 201, Change ".264" to read ".268."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

PAGE 36

4.4.2.13: Note A, Add "Special inspection level S-4 shall be applied for selecting sample size."

PAGE 46

4.4.2.22: Delete paragraph in its entirety and substitute new paragraph included.

PAGE 55

4.4.2.31: Delete Major 101 in its entirety and substitute "None defined."

PAGE 64

* Delete in its entirety and substitute included pages 64 and 64a.

PAGE 65

* Delete in its entirety and substitute per included sheet.

PAGE 66

Delete in its entirety and substitute per included sheet.

PAGE 67

Figure 4: Add new figure per included sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.22	Cam	1	1	11744137
				NEXT HIGHER ASSEMBLY: 11737016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Insufficient strength of arm		0.40%	3.1	Force test (Dwg. Note 5)
102	.203 arm height or perpendicularity out-of-tolerance		0.40%	3.1	Gage
103	.140 arm length out-of-tolerance		0.40%	3.1	Gage
Minor					
201	.125 diameter out-of-tolerance		0.65%	3.1	Gage
202	.500 length out-of-tolerance		0.65%	3.1	Gage
203	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Source: https://standards.iteh.ai Downloaded: 2020-10-23T04:04:04Z
Check the source to verify that this is the current version before use.

FIGURE 1

FIRST ARTICLE INSPECTION FLOW CHART

436
SAFETY ARMING DEVICE
11737007

85
351
30
25
30
LOW TEMPERATURE
3.3 4.5
AMBIENT TEMPERATURE
HIGH TEMPERATURE
3.3 4.5
5
75
25
5
25

CHARACTERISTICS	REQ PARA	TEST PARA	AC	RE
SPRING GEAR LATCH (NON DESTRUCTIVE)	3.3.2.1	4.5.2.1	1	2
ZIG ZAG NON FUNCTION	3.3.2.2	4.5.2.2	0	1
ZIG ZAG FUNCTION	3.3.2.3	4.5.2.3	0	1
ARMING TIME	3.3.2.4	4.5.2.4	1	2

CHARACTERISTICS	REQ PARA	TEST PARA	AC	RE
SPRING GEAR LATCH (DESTRUCTIVE)	3.3.2.5	4.5.2.5	1	2


75
10
55
406
CONTRACTOR
GOVERNMENT
19 20
ENGINEERING CONTROL SAMPLES
FUZE PD M745
(LESS BOOSTER AND LEAD)
11737001
24
88
294

CHARACTERISTICS	REQ PARA	TEST PARA	AC	RE
TURBINE LATCH	3.3.1	4.5.1.3	1	2

80
214
CONT. P. 64A
CONT. P. 64A
CONT. P. 64A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

FIGURE 1 (continuation)

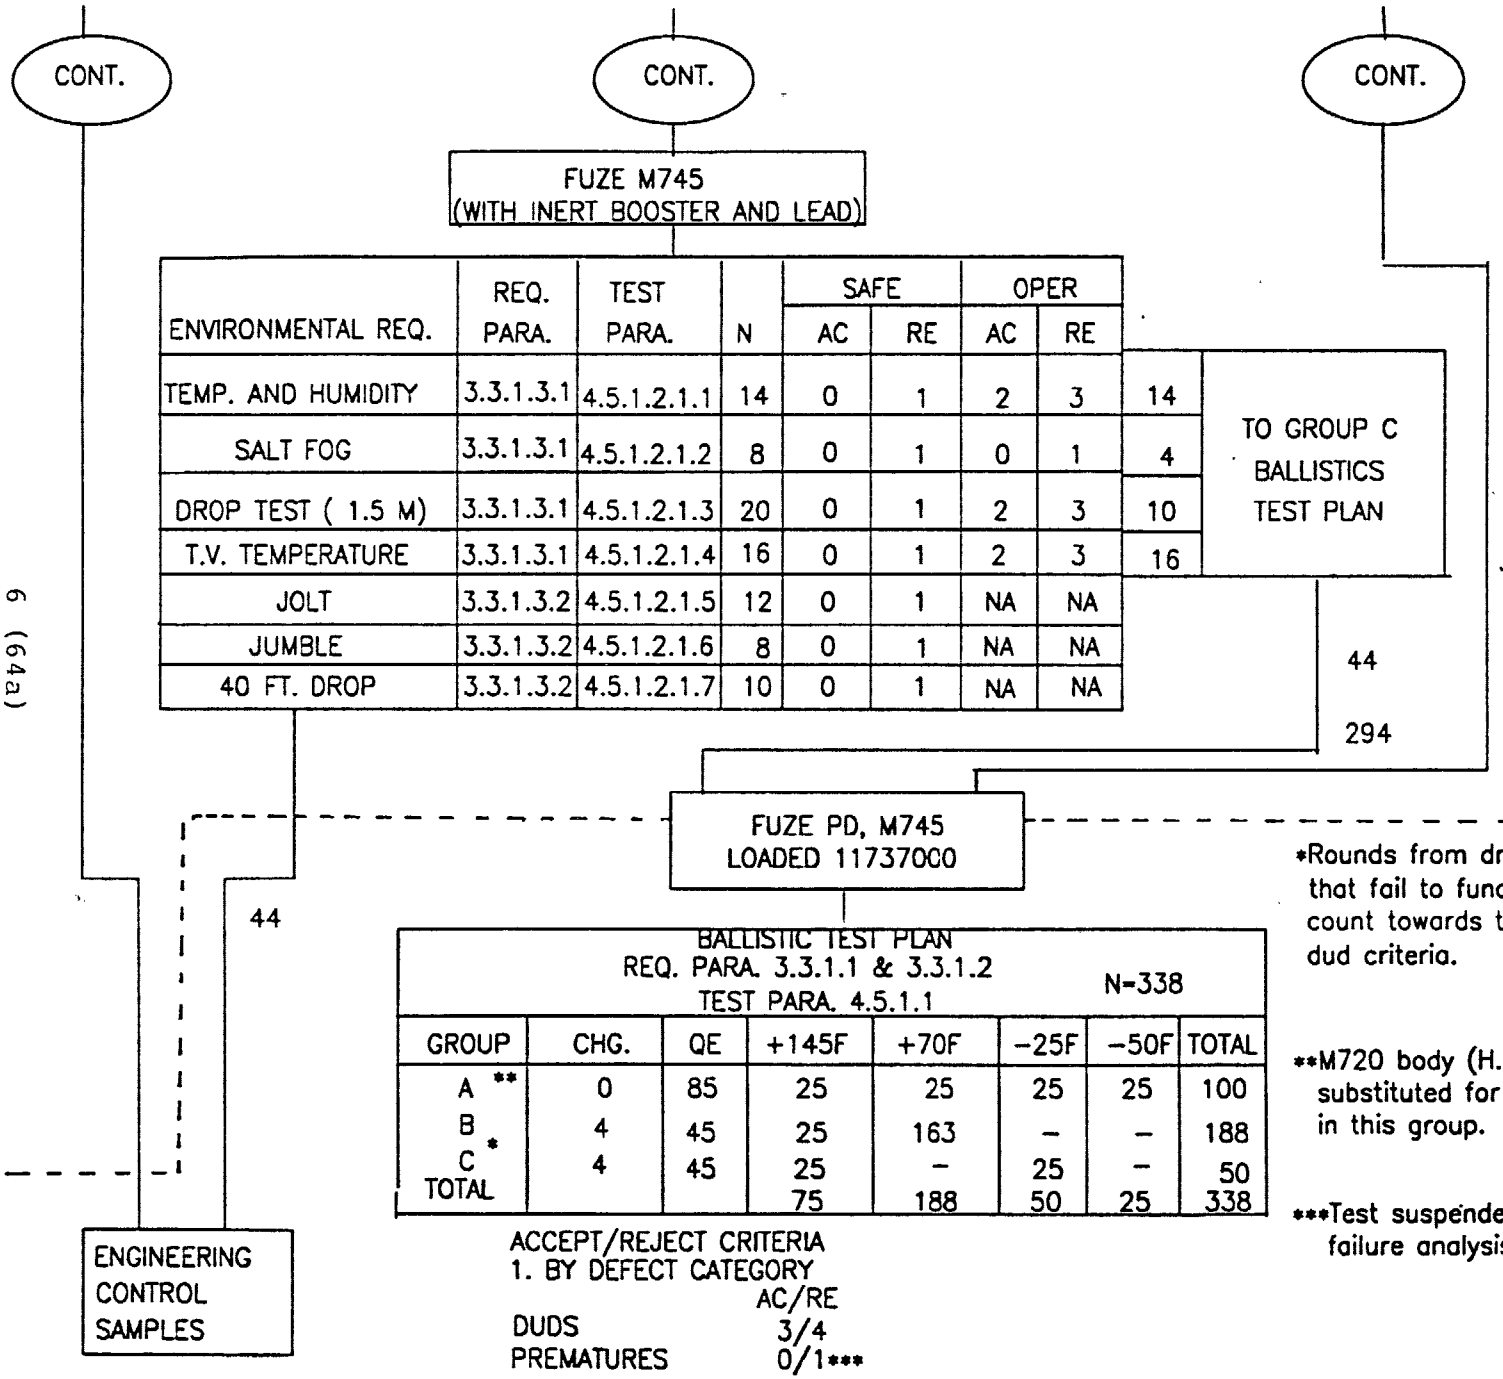

ENVIRONMENTAL REQ.	REQ. PARA.	TEST PARA.	N	SAFE AC	SAFE RE	OPER AC	OPER RE	
TEMP. AND HUMIDITY	3.3.1.3.1	4.5.1.2.1.1	14	0	1	2	3	14
SALT FOG	3.3.1.3.1	4.5.1.2.1.2	8	0	1	0	1	4
DROP TEST (1.5 M)	3.3.1.3.1	4.5.1.2.1.3	20	0	1	2	3	10
T.V. TEMPERATURE	3.3.1.3.1	4.5.1.2.1.4	16	0	1	2	3	16
JOLT	3.3.1.3.2	4.5.1.2.1.5	12	0	1	NA	NA	
JUMBLE	3.3.1.3.2	4.5.1.2.1.6	8	0	1	NA	NA	
40 FT. DROP	3.3.1.3.2	4.5.1.2.1.7	10	0	1	NA	NA	

BALLISTIC TEST PLAN
REQ. PARA. 3.3.1.1 & 3.3.1.2
TEST PARA. 4.5.1.1
N=338

GROUP	CHG.	QE	+145F	+70F	-25F	-50F	TOTAL
A **	0	85	25	25	25	25	100
B	4	45	25	163	–	–	188
C *	4	45	25	–	25	–	50
TOTAL			75	188	50	25	338

*Rounds from drop test (1.5M) that fail to function will not count towards the accept/reject dud criteria.


**M720 body (H.E. Fill) must be substituted for M722 body in this group.


***Test suspended immediately for failure analysis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.


FIGURE 2

INITIAL LOT PERFORMANCE INSPECTION FLOW CHART

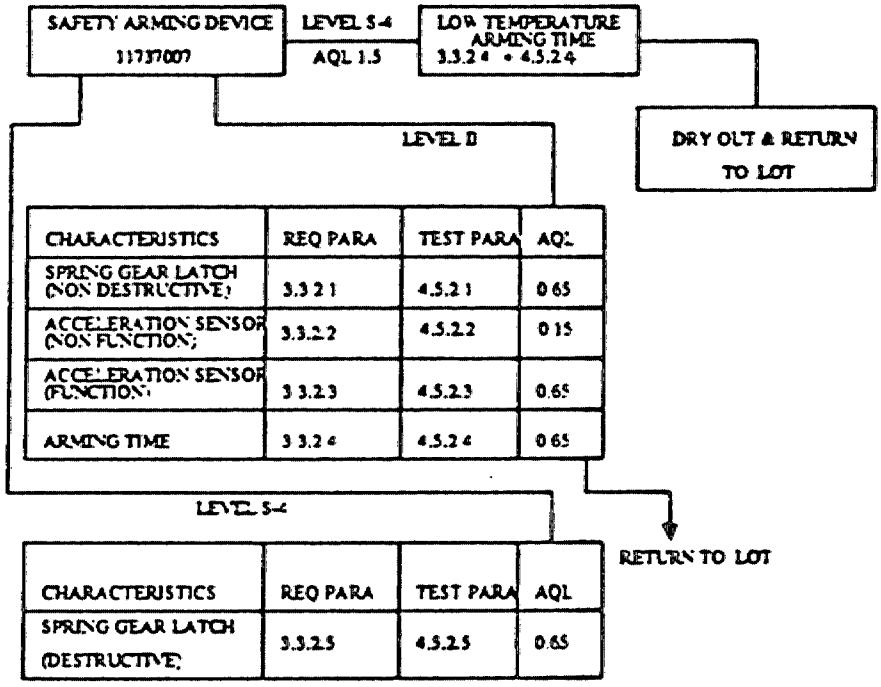

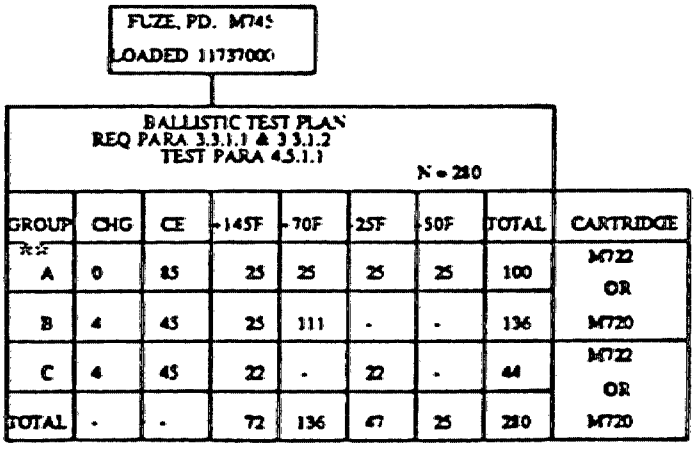

** M720 body (H.E. Fill) must be substituted for M722 body in this group.

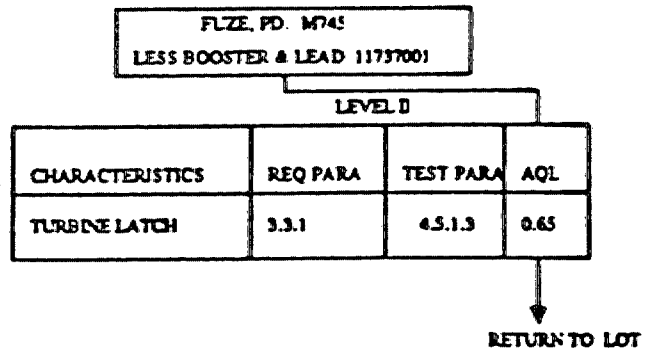


OVERALL CRITERIA	N	AC/RE	APPLICABLE PARA
DUDS	280	3/4	4.5.1.1.2.1
PREMATURES	280	0/1*	4.5.1.1.2.2


* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

FIGURE 3

LOT PERFORMANCE INSPECTION FLOW CHART

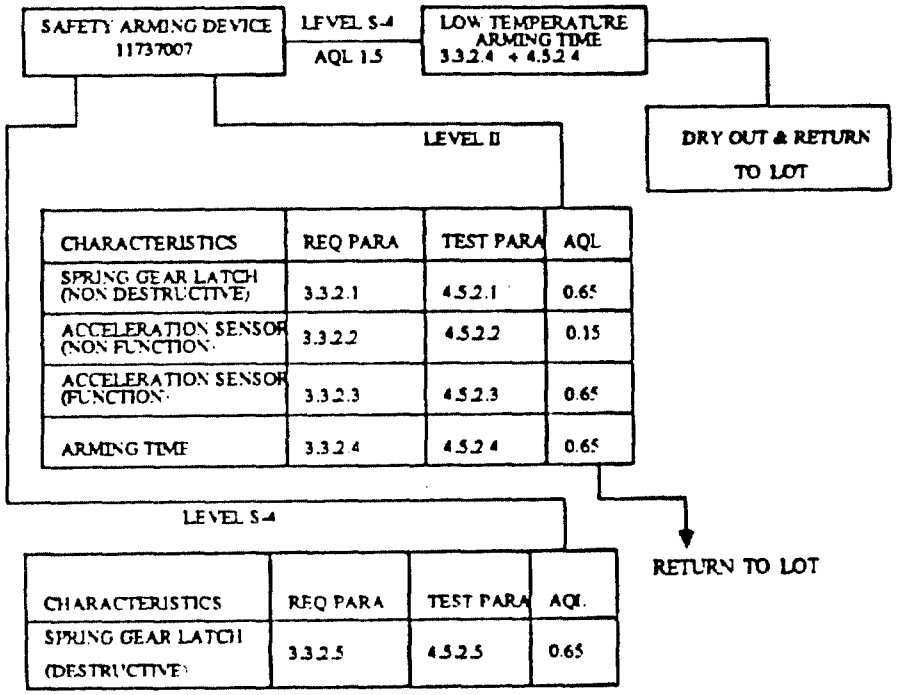

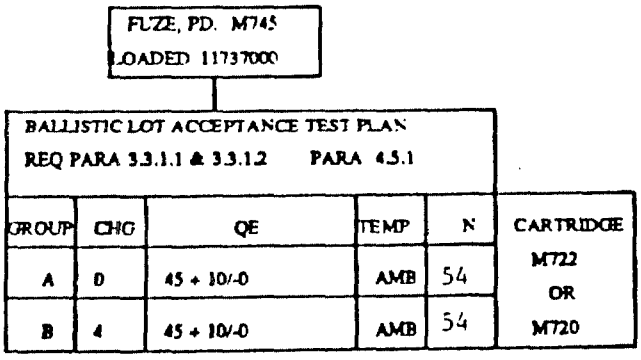


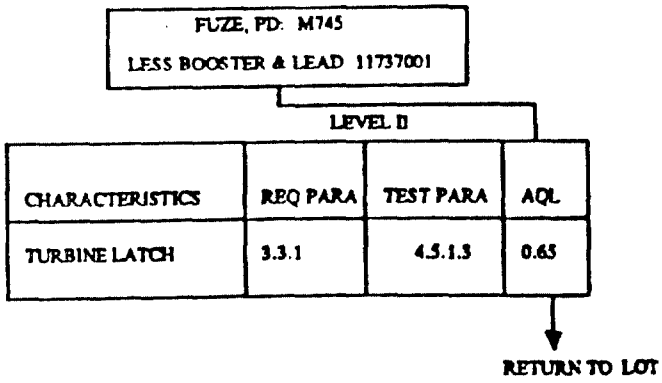

OVERALL CRITERIA	N	AC/RE	APPLICABLE PARA
DUDS	108	2/3	4.5.1.1.2.1
PREMATURES	108	0/1*	4.5.1.1.2.2

* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

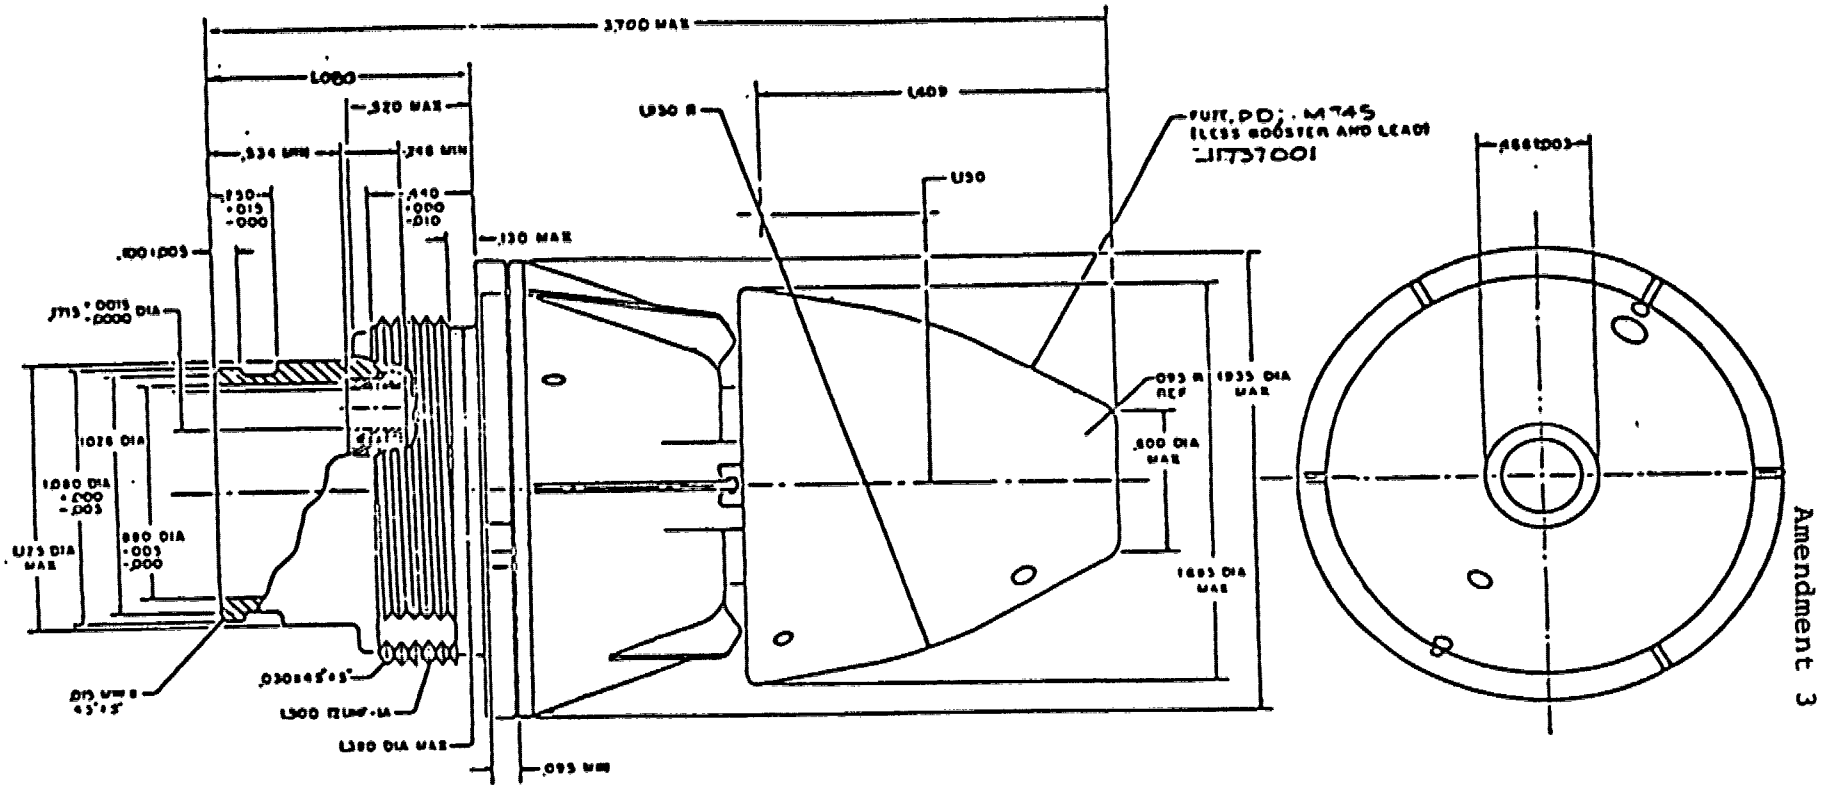

NOTES

1. WEIGHT OF FULLY LOADED FUZE IS .50 + .00/- .10 LBS
2. .1715 DIA HOLE SHALL BE ADJACENT TO SCALLOP IN BOOSTER CAVITY SUCH THAT LEAD CAN BE INSERTED
3. S & A ROTOR SHALL BE IN SAFE POSITION (DWGS 11737010 AND 11737007). M61 DETONATOR (8865554) IN PRIMER HOUSING ASSY (11737026) SHALL NOT BE VISIBLE THROUGH BARRIER LEAD HOLE IN AFT END OF FUZE.
4. FUZE SHALL BE PERMANENTLY MARKED PER DWGS 11740819
5. FUZE SHOWN IS NOT FULLY LOADED SEE DWG NO 11737000 FOR LOADED ASSEMBLY AND COMPLETE INTERFACE DIMENSIONS

FIGURE 4 INTERFACE CONTROL DRAWING

Source: https://assist.dla.mil (67)
Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A681)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.