
MILITARY SPECIFICATION SHEET

FITTING, ELBOW, 90°, BEAM SEAL, 3000/4000 PSI, MALE TO FEMALE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-85421.

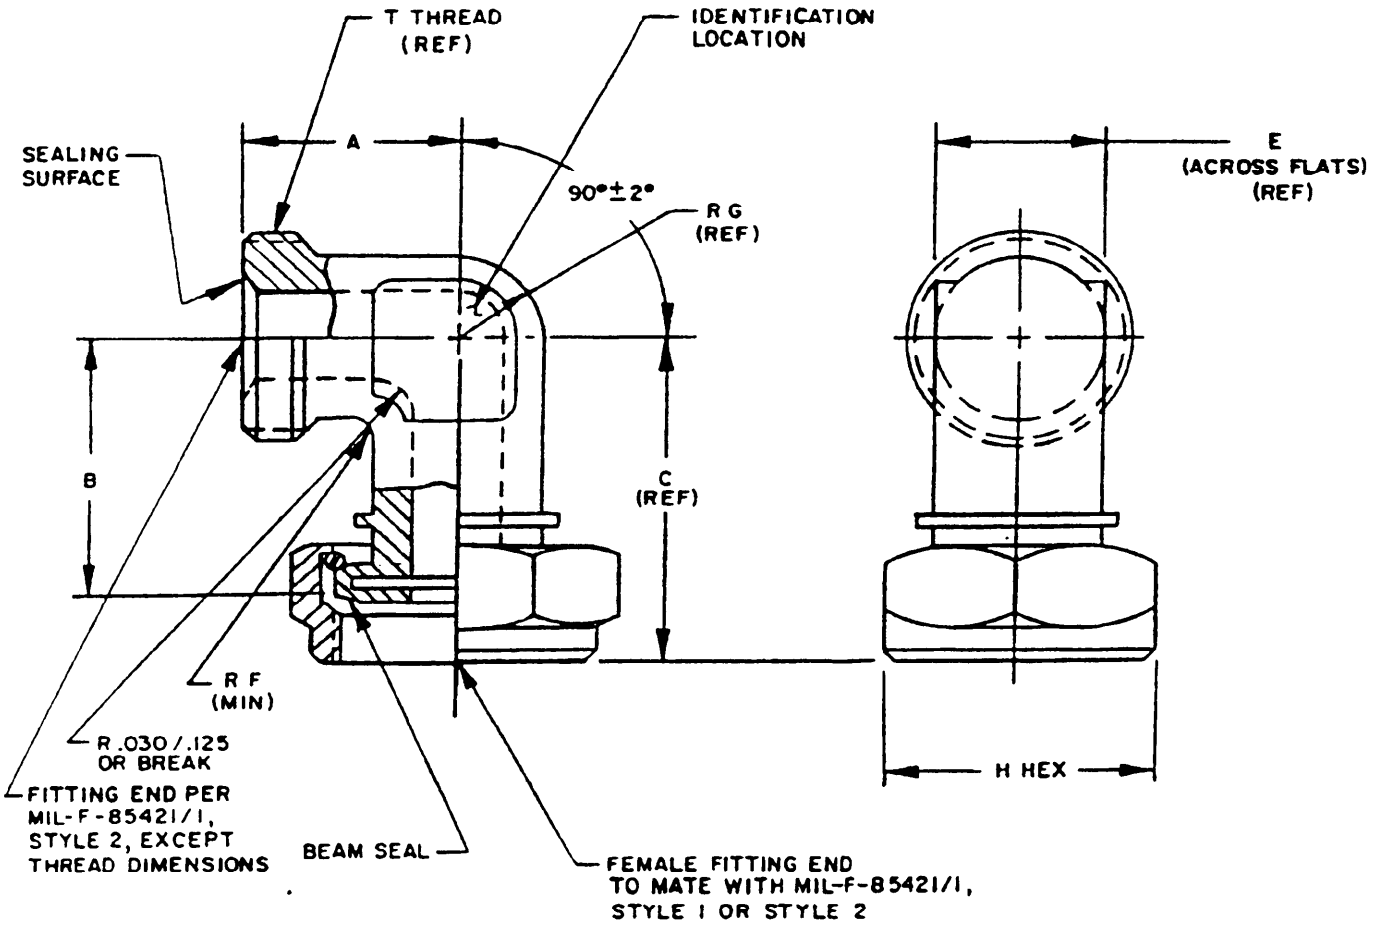

AMSC N/A

FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

Dash No.	Tube O.D.	T Thread MIL-S-8879 (Ref)	A	B	C (Ref)	E (Ref)	F Rad (Min)	G Rad (Ref)	H		Wt Lbs (Max) Ti	Wt Lbs (Max) Cres
-03	.188	.3750-28UNJS-3A	.575	.702	.873	.375	.042	.188	.500		.020	.035
-04	.250	.4375-24UNJS-3A	.617	.808	1.104	.375	.042	.188	.562		.024	.040
-05	.312	.5000-24UNJS-3A	.653	.850	1.060	.438	.042	.219	.625		.030	.042
-06	.375	.5625-20UNJS-3A	.704	.945	1.178	.500	.042	.250	.688		.051	.090
-08	.500	.7188-20UNJS-3A	.824	1.045	1.294	.562	.070	.281	.875	+.003 -.004	.074	.131
-10	.625	.8438-18UNJS-3A	.955	1.178	1.485	.688	.070	.344	1.000		.120	.212
-12	.750	1.0000-16UNJ-3A	1.062	1.316	1.659	.875	.098	.438	1.125		.160	.283
-14	.875	1.1250-16UNJ-3A	1.216	1.514	1.862	1.125	.098	.563	1.375		.240	.425
-16	1.000	1.2500-14UNJS-3A	1.246	1.529	1.895	1.125	.098	.563	1.500	±.016	.294	.520
-20	1.250	1.5781-14UNJS-3A	1.387	1.847	2.216	1.375	.098	.688	1.875		.500	.884
-24	1.500	1.8438-14UNJS-3A	1.688	2.171	2.620	1.625	.098	.813	2.125	±.020	.735	1.300

Sizes -20 and -24 were originally designated as sizes -21 and -25 on some manufacturer's drawings. These sizes will not connect with the original -20 and -24 fittings. See paragraph 6.9 in the procurement specification for additional information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Materials: Titanium Alloy, Corrosion Resistant Steel } See procurement specification

2. Finish: Titanium: Fluoride phosphate coat per AMS 2486.
Corrosion Resistant Steel: Surface shall be treated and passivated per QQ-P-35.

NOTES:


1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±.015.

2. Remove all burrs and break all sharp edges.

3. All machined surfaces shall be smooth to 125 microinches R_a per ANSI/ASME B46.1 unless otherwise specified.

4. Part numbers:
Add "T" after slash number for 6AL-4V titanium alloy per AMS 4965.
Add "P" after slash number for 17-4PH corrosion resistant steel per AMS 5643.
Add "V" after slash number for 15-5PH corrosion resistant steel per AMS 5659.

5. Example of part numbers:

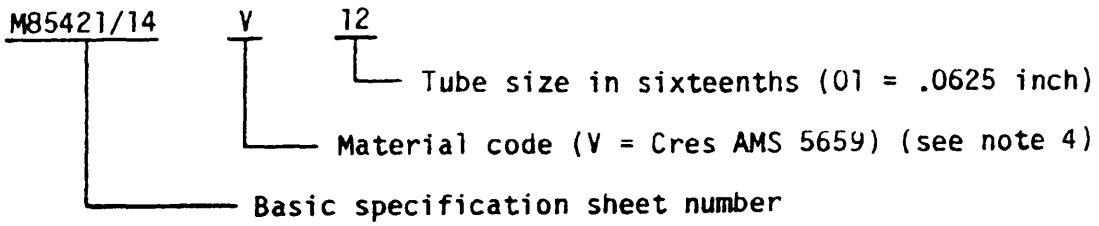

6. Do not use unassigned part numbers.

7. Identification: Impression stamp, laser mark or electro-chemical etch on the location shown in accordance with the procurement specification.

8. Titanium is not recommended for use in gaseous or liquid oxygen systems.

9. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

10. Referenced government (or non-government) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this document to the extent specified herein.

11. Radius .030/.125 or break applies to titanium only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review Activities:
Army - MI
Air Force - 71, 82
DLA - CS
Marine Corps - MC

User Activities:
Army - ME, AT

Preparing Activity:
Navy - AS
(Project No. 4730-1151)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:49Z
Check the source to verify that this is the current version before use.