INCH-POUND


MIL-F-85421/2
30 NOV 1988

MILITARY SPECIFICATION SHEET

FITTING END, STANDARD DIMENSIONS FOR BULKHEAD,
DYNAMIC BEAM SEAL, MALE.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the design standard described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-85421.

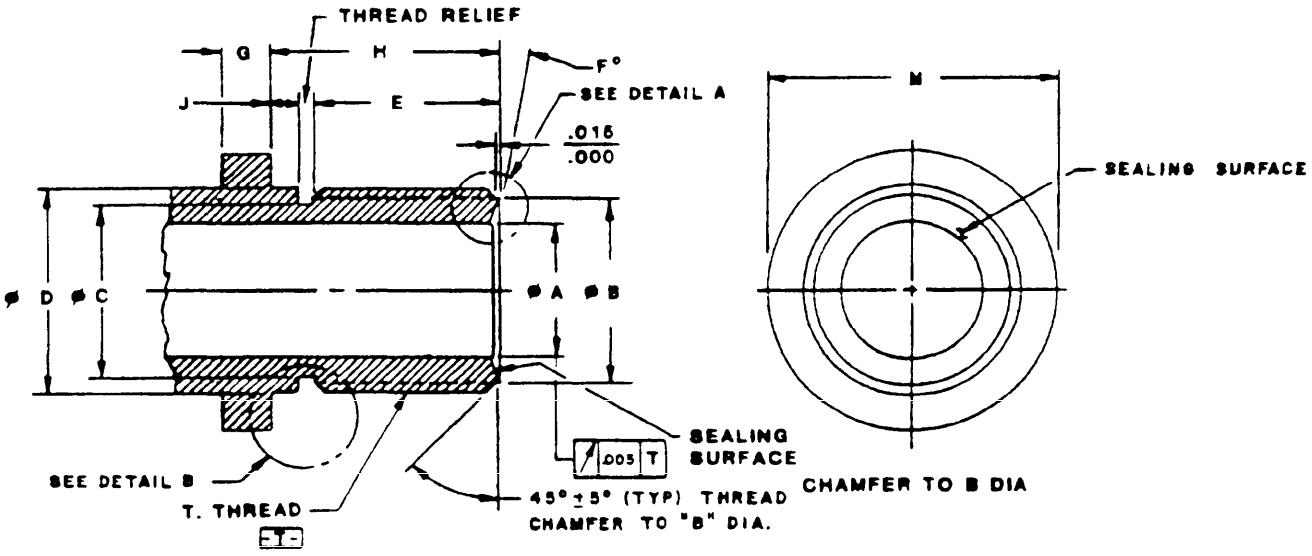


STYLE 1

DESIGN STANDARD


AMSC N/A
FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.

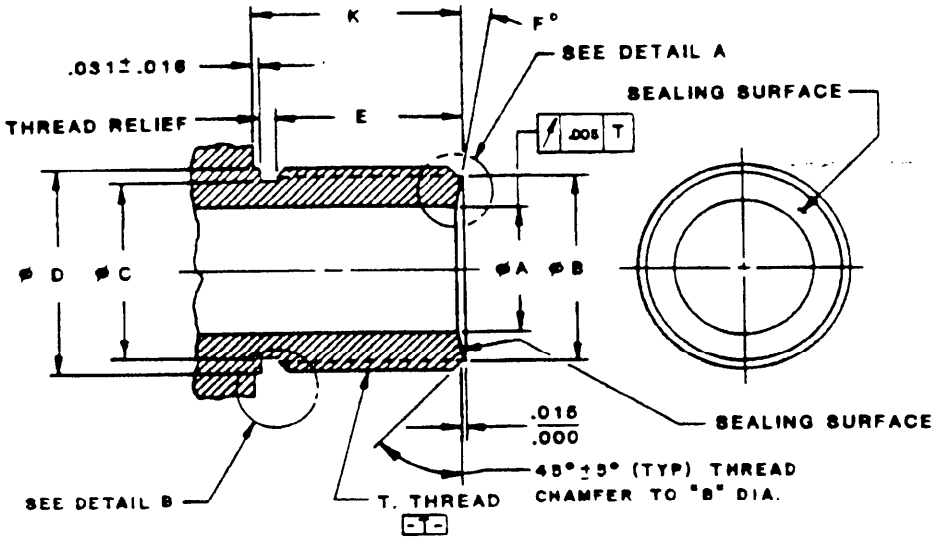

STYLE 2

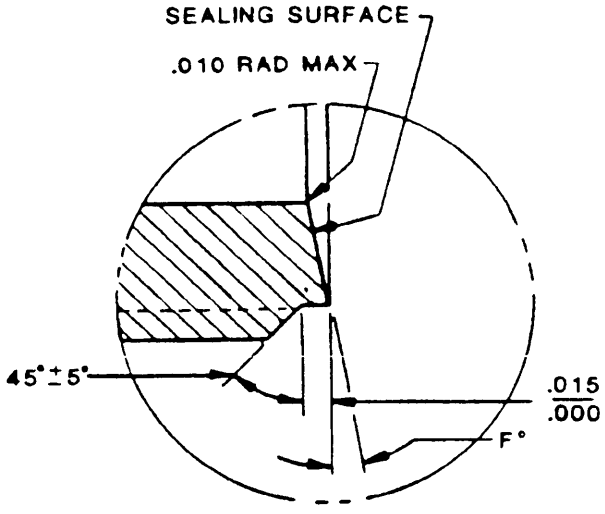

DETAIL A

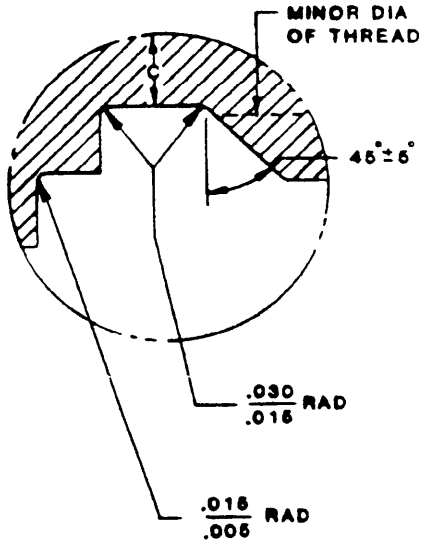

DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.


DASH SIZE	TUBING OD	T-THREAD MIL-S-8879	A		B		C	D		E	F	G	H	J	K	M	
			MIN	MAX	MIN	MAX	±.005	MIN	MAX	±.015	+0°30' -0°	HEX -REF	±.015	±.016	±.015		
03	.188	.3750-28UNJS-3A	.154	.164	.323	.329	.318	.369	.375	.501	3°00'	.137	.649	.094	.568	.625	+.003 -.004
04	.250	.4375-24UNJS-3A	.184	.194	.377	.383	.373	.431	.438	.583	8°30'	.147	.743		.680	.688	
05	.312	.5000-24UNJS-3A	.232	.242	.440	.446	.436	.493	.500	.583		.150	.743		.680	.750	
06	.375	.5625-20UNJS-3A	.297	.307	.490	.497	.488	.555	.563	.603		.173	.782		.719	.813	
08	.500	.7188-20UNJS-3A	.398	.408	.646	.654	.644	.711	.719	.629		.186	.849	.125	.755	1.000	
10	.625	.8438-18UNJS-3A	.512	.523	.763	.772	.762	.835	.844	.755		.196	.988		.894	1.125	
12	.750	1.0000-16UNJ-3A	.649	.660	.910	.919	.910	.991	1.000	.833		.221	1.084		.990	1.375	
14	.875	1.1250-16UNJ-3A	.769	.780	1.034	1.044	1.035	1.116	1.125	.885		.264	1.136		1.042	1.625	±.016
16	1.000	1.2500-14UNJS-3A	.862	.874	1.148	1.158	1.149	1.240	1.250	.925		.223	1.176		1.082	1.625	
[1] 20	1.250	1.5781-14UNJS-3A	1.115	1.128	1.476	1.486	1.477	1.568	1.578	.919		.223	1.170		1.076	1.875	
[1] 24	1.500	1.8438-14UNJS-3A	1.324	1.337	1.741	1.751	1.742	1.834	1.844	1.089		.223	1.340		1.246	2.125	±.020

[1] Sizes -20 and -24 were originally designated as sizes -21 and -25 on some manufacturer's drawings. These sizes will not connect with the original -20 and -24 fittings. See paragraph 6.8 of MIL-F-85421B for additional information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±.010; angles ± 1/2°
2. Remove all burrs and break all sharp edges.
3. All machined surfaces shall be smooth to 125 microinches Ra per ANSI B46.1, except as noted.
4. Sealing surface shall be free from longitudinal and spiral tool marks and shall be smooth to 45 microinches Ra in accordance with ANSI B46.1.
5. Sealing surface shall be coated with solid film lubricant per MIL-L-46010. Overspray in bore is not permitted.
6. Dimensions A, B, C, D and T (pitch dia) shall be concentric to each other with F° angle, measured and calculated as an included angle, within .005 FIM.
7. Example of design identification number:

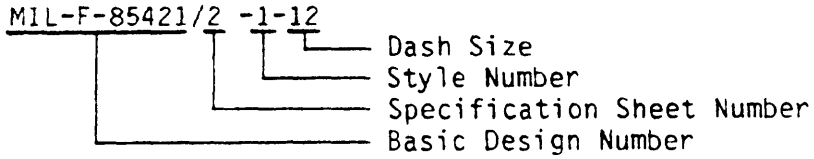

8. If the text of this standard and the referenced documents listed herein are in conflict, the text of this standard shall take precedence.
9. Referenced government or non-government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
10. This is a design standard, not to be used as a part number.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review Activities:
Army - MI
Air Force - 71, 82
DLA - CS

User Activites:
Army - GL, ME, AT,

Preparing Activity:
NAVY - AS
(Project No. 4730-1048)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.