
MILITARY SPECIFICATION SHEET

FITTING, TEE, REDUCER, BEAM SEAL, 3000/4000 PSI, 3 MALE ENDS

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-85421.

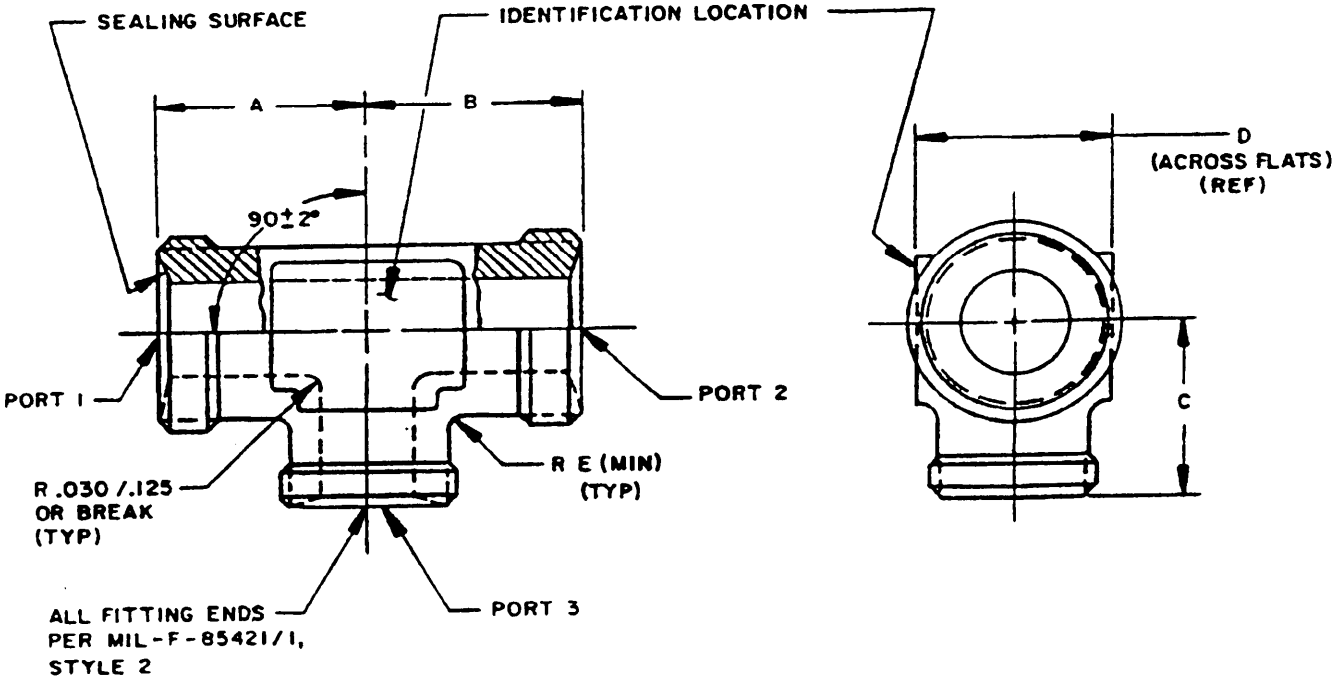

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional data.

Port (1)	Port (2)	Port (3)	A	B	C	D (Ref)	E Rad (Min)	Wt Lbs (Max) Ti	Cres
04	04	04	.684	.684	.684	.500	.042		
04	04	06	.684	.684	.704	.500	.042	.044	.077
06	04	06	.704	.684	.704	.500	.042	.046	.081
06	06	04	.704	.704	.684	.500	.042	.042	.074
06	06	06	.704	.704	.704	.500	.042		
06	06	08	.811	.811	.824	.562	.070	.048	.086
08	04	04	.824	.791	.791	.562	.070	.051	.090
08	04	08	.824	.791	.824	.562	.070	.057	.100
08	06	06	.824	.811	.811	.562	.070	.055	.097
08	08	04	.824	.824	.791	.562	.070	.068	.121
08	08	06	.824	.824	.811	.562	.070	.070	.124
08	08	08	.824	.824	.824	.562	.070		
10	08	08	.955	.891	.891	.688	.070	.086	.152
10	10	08	.955	.955	.891	.688	.070	.145	.200
10	10	10	.955	.955	.955	.688	.070		
12	08	08	1.062	.958	.958	.875	.098	.134	.260
12	10	08	1.062	1.022	.958	.875	.098	.176	.311
12	12	08	1.062	1.062	.958	.875	.098	.244	.432
12	12	12	1.062	1.062	1.062	.875	.098		
12	12	16	1.198	1.198	1.246	1.125	.098	.271	.479
16	10	16	1.246	1.158	1.246	1.125	.098	.260	.459
16	12	12	1.246	1.198	1.198	1.125	.098	.255	.455
16	16	10	1.246	1.246	1.158	1.125	.098	.246	.440
16	16	16	1.246	1.246	1.246	1.125	.098		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Materials: Titanium Alloy, Corrosion Resistant Steel } See procurement specification

2. Finish: Titanium: Fluoride phosphate coat per AMS 2486. Corrosion Resistant Steel: Surface shall be treated and passivated per QQ-P-35.

NOTES:


1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±.015.

2. Remove all burrs and break all sharp edges.

3. All machined surfaces shall be smooth to 125 microinches R_a per ANSI/ASME B46.1 unless otherwise specified.

4. Part numbers:
   Add "T" after slash number for 6AL-4V titanium alloy per AMS 4965.
   Add "P" after slash number for 17-4PH corrosion resistant steel per AMS 5643.
   Add "V" after slash number for 15-5PH corrosion resistant steel per AMS 5659.

5. Example of part numbers:

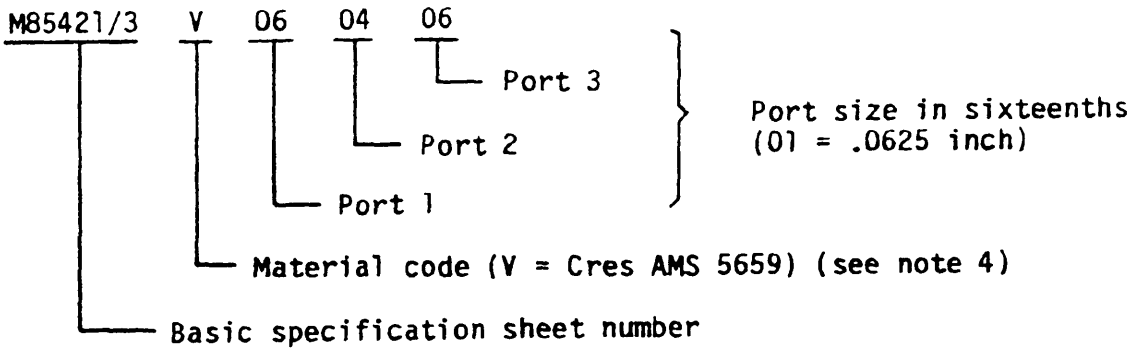

6. Do not use unassigned part numbers.

7. Identification: Impression stamp, laser mark or electro-chemical etch on the location shown in accordance with the procurement specification.

8. Titanium is not recommended for use in gaseous or liquid oxygen systems.

9. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.

10. Referenced government (or non-government) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this document to the extent specified herein.

11. Radius .030/.125 or break applies to titanium only.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review Activities:
Army - MI
Air Force - 82
DLA - CS

User Activities:
Army - ME, AT
Marine Corps - MC

Preparing Activity:
Navy - AS
(Project No. 4730-1096)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:48Z
Check the source to verify that this is the current version before use.